




**THE DATASHEET OF  
2.4J-LA-K292P**



①②③④⑤⑥⑦⑧⑨

VIEW A

(16.4)

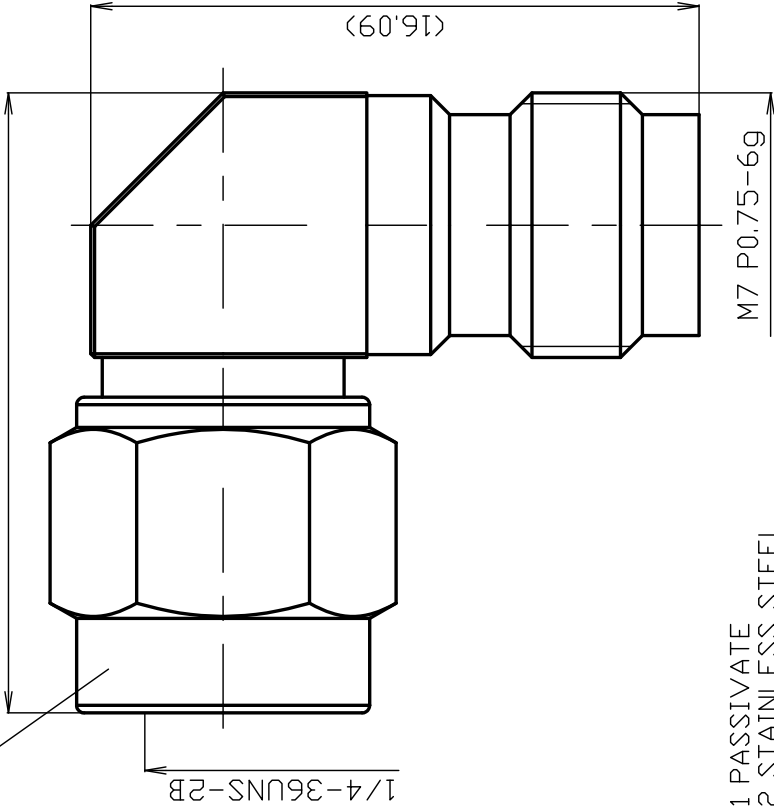

1/4-36UNS-2B

VIEW B

\*1 PASSIVATE  
 \*2 STAINLESS STEEL  
 \*3 BERYLLIUM COPPER

9	BUSHING	*2	4	*1	
8	CENTER PIN C	*3	1	Au	
7	INSULATOR B	PEI	1	--	
6	CENTER PIN B	*3	1	Au	
5	INSULATOR A	PEI	1	--	
4	CENTER PIN A	*3	1	Au	
3	BODY	*2	1	*1	
2	HOLDING RING	*3	1	Ni	
1	COUPLING NUT	*2	1	*1	
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK

SCALE 5/1

UNIT mm

DATE 2024.05.24

DRAWN

井出

'24.05.24

INSPECTED

檜澤

'24.05.24

APPR

井出

'24.05.24

PROJECTION



株式会社 70-

# PRODUCT SPECIFICATIONS

Part number: 2.4J-LA-K292P

No. 0642557

Drawing number: U-0646355

Nominal 1 Standard IEC 61169-40、IEC 61169-35

2 Voltage rating AC 160V

3 Rated frequency 40GHz

4 Impedance 50Ω

5 Operating temperature range -40°C~+85°C



		Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	Insulation resistance	1000MΩ(Min.) at DC 500V	
2		Withstanding voltage	1 minute at AC 500V	
3		Contact resistance	Inner conductor : 4.0mΩ(Max.)(2.4Side) Inner conductor : 3.0mΩ(Max.)(2.92Side)  Outer conductor : 2.5mΩ(Max.)(2.4Side) Outer conductor : 2.0mΩ(Max.)(2.92Side)	
4		VSWR	DC~40GHz : 1.25(Max.)	
5	M E C H A N I C A L	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector
6		Tensile strength of coupling mechanism	450N(2.4Side)  100N(2.92Side)	At axial tensile force
7		Center contact retaining force	0.25N(Min.)	With a standard pin gauge
8		Coupling torque	0.8~1.1N·m	

※The structural shape is shown in the attached drawing (Drawing number:U-0646355)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
 24.05.24	 24.05.24	 24.05.24	 24.05.24

GKQM-24

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View 2.4J-LA-K292P](#) on WIN SOURCE
- ⊖ [TYCLON](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management