




# THE DATASHEET OF 2.4-LA-PP



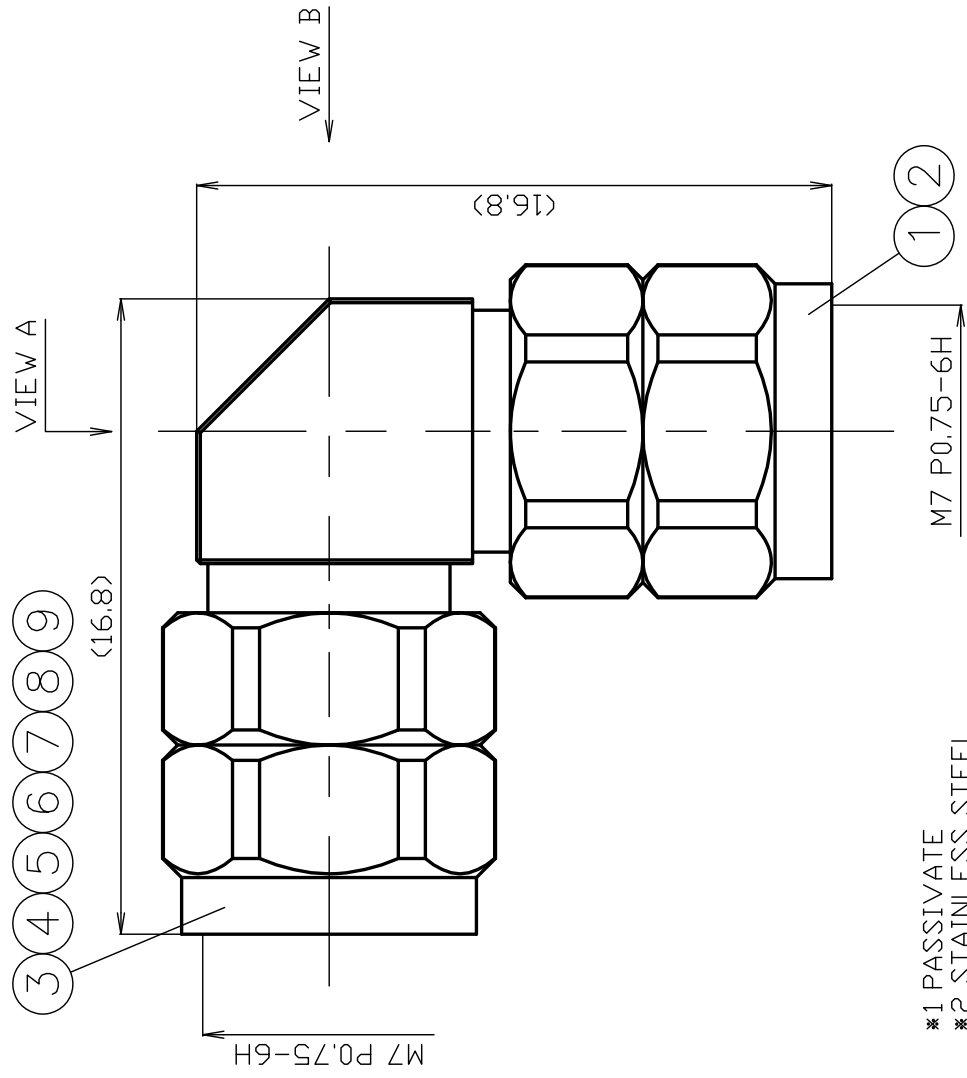

- \*1 PASSIVATE
- \*2 STAINLESS STEEL
- \*3 BERYLLIUM COPPER

9	BUSHING	*2	5	*1	
8	CENTER PIN C	*3	1	Au	
7	INSULATOR B	PEI	1	--	
6	CENTER PIN B	*3	1	Au	
5	INSULATOR A	PEI	1	--	
4	CENTER PIN A	*3	1	Au	
3	BODY	*2	1	*1	
2	HOLDING RING	*3	2	Ni	
1	COUPLING NUT	*2	2	*1	
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK

SCALE 5/1

UNIT mm

DATE 2024.05.23

DRAWN 井出 '24.05.23

PROJECTION

INSPECTED 檜澤 '24.05.23

APPROVED

70-

株式会社

# PRODUCT SPECIFICATIONS

Part number: 2.4-LA-PP

No. 1042555

Drawing number: U-1046353

Nominal 1 Standard IEC 61169-40  
 2 Voltage rating AC 160V  
 3 Rated frequency 50GHz  
 4 Impedance 50Ω  
 5 Operating temperature range -40°C~+85°C



		Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	Insulation resistance	1000MΩ(Min.) at DC 500V	
2		Withstanding voltage	1 minute at AC 500V	
3		Contact resistance	Inner conductor : 4.0mΩ(Max.) Outer conductor : 2.5mΩ(Max.)	
4		V.S.W.R	DC~50GHz : 1.35(Max.)	
5	M E C H A N I C A L	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector
6		Tensile strength of coupling mechanism	450N	At axial tensile force
7		Coupling torque	0.8~1.1N·m	
	O T H E R S			

※The structural shape is shown in the attached drawing (Drawing number:U-1046353)



	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
 24.05.23 村	 24.05.23 山本	 24.05.23 村澤	 24.05.23 井出

GKQM-24

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 2.4-LA-PP on WIN SOURCE](#)
-  [TYCLON Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management