



THE DATASHEET OF ES1J



1.0A Surface Mount Super Fast Rectifier

Features

- Low profile surface mounted package
- Glass passivated junction
- Ultra fast recovery time for high efficiency
- Plastic package has underwriters laboratory flammability classification 94V-0
- High temperature soldering: 250 °C /10 seconds at terminals
- RoHS compliant



SMA

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted)

Symbol	Description	ES1A	ES1B	ES1D	ES1F	ES1G	ES1J	ES1K	Unit	Conditions
VRRM	Maximum Repetitive Peak Reverse Voltage	50	100	200	300	400	600	800	V	
VRMS	Maximum RMS Voltage	35	70	140	210	280	420	560	V	
VDC	Maximum DC Blocking Voltage	50	100	200	300	400	600	800	V	
I_{AV}	Maximum Average Forward Rectified Current	1.0							A	TL=110°C
I_{FSM}	Peak Forward Surge Current	30						25	A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
T_J,T_{STG}	Operating Junction and Storage Temperature Range	-55 to 150							°C	

Note: Single phase half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted)

Symbol	Description	ES1A	ES1B	ES1D	ES1F	ES1G	ES1J	ES1K	Unit	Conditions	
V_F	Maximum Instantaneous Forward Voltage	0.95			1.25		1.7	2.2	V	$I_F=1.0$ A	
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	5								μA	$T_A=25^{\circ}C$
		50									$T_A=125^{\circ}C$
T_{rr}	Typical Reverse Recovery Time	35								nS	$I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$
C_J	Typical Junction Capacitance	10								pF	Measured at 1.0 MHz and Applied $V_r = 4.0$ volts.
$R_{\theta-JA}$	Maximum Thermal Resistance	34								$^{\circ}C/W$	Mounted on 0.2" x 0.2" (5mmx5mm) copper pad area

Note: Single phase half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Typical Characteristics Curves

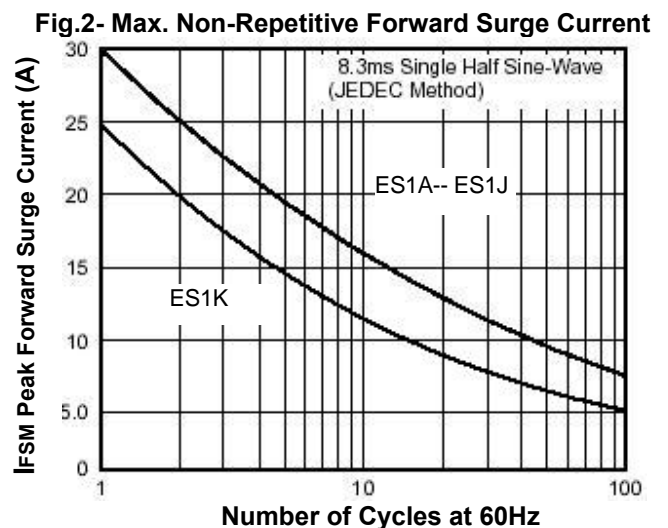
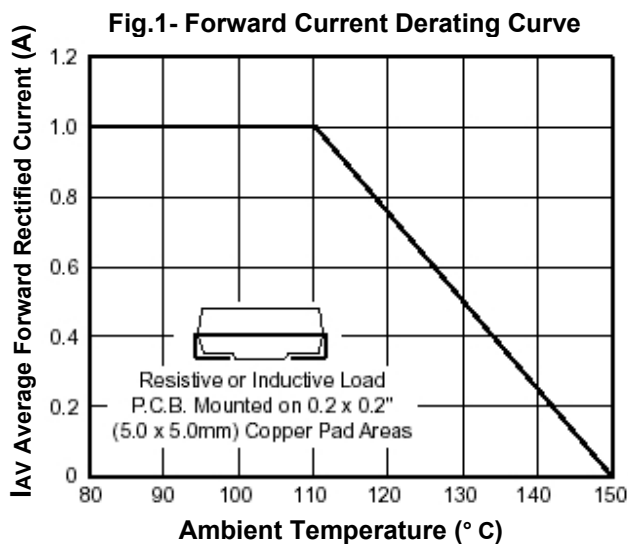


Fig.3- Typical Reverse Characteristics



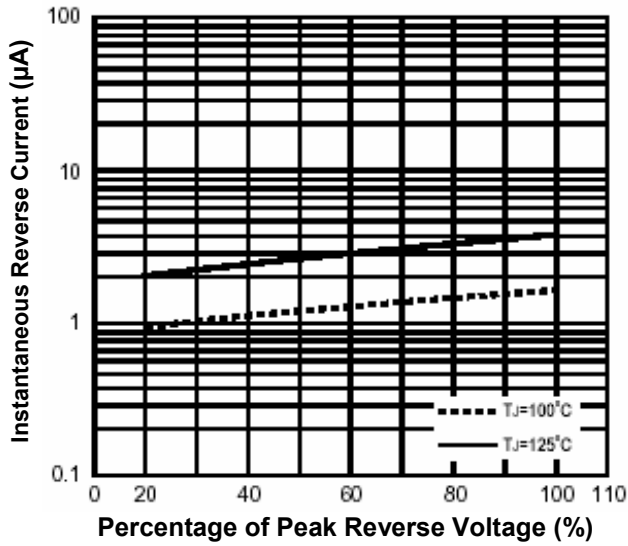



Fig.4- Junction Capacitance



Dimensions in inch (mm)

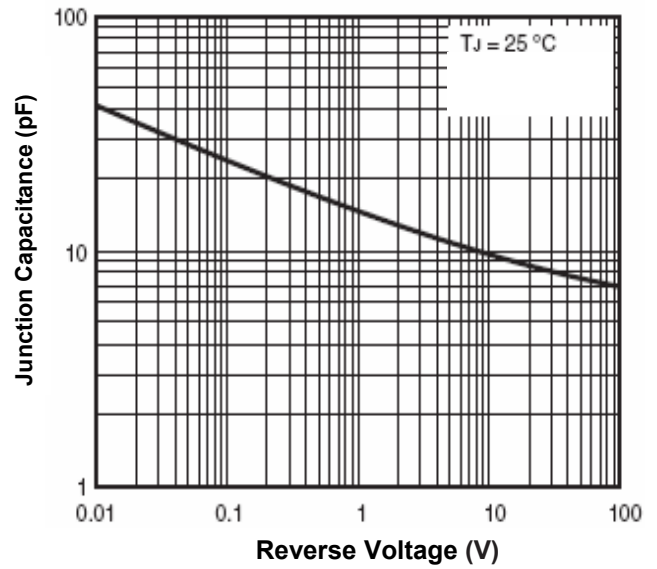

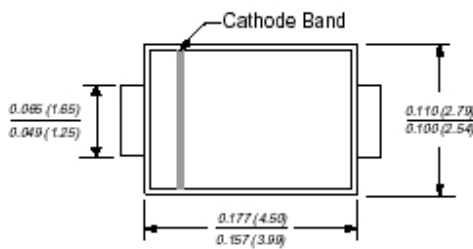

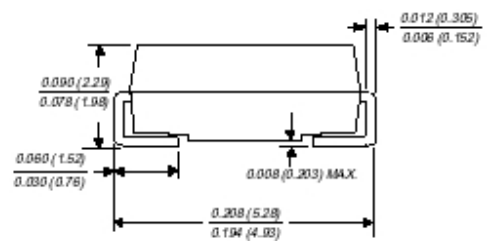DO-214AC (SMA)



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ES1J on WIN SOURCE](#)
-  [ShenZhen SikorMicro Semicon Co. Ltd Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management