




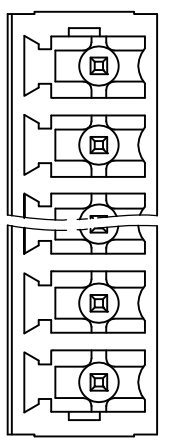


**THE DATASHEET OF
OSTOQ083250**

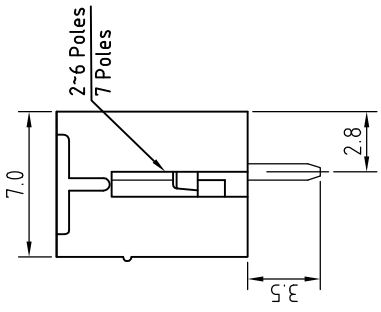

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

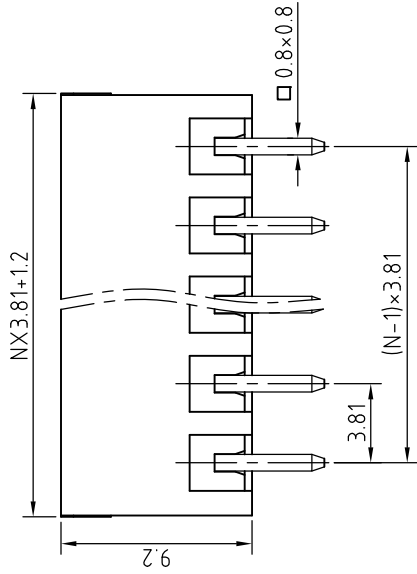

N=Number of contacts

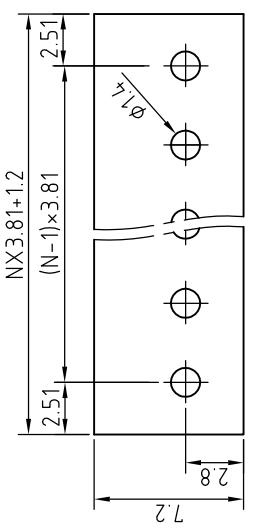

P.C.B. LAYOUT

Technical Data:
Electrical
 Pitch: 3.81mm
 Voltage rating: 300V
 Current rating: 12 Amps
 Withstanding Voltage: 2000V
Mechanical:
 Operating temperature: -40°C
 Soldering temperature: 260°C
 Temperature= 250°C±10°C /
 Safety approval:
 RoHS Compliance

Part No.:

OSTOQXX3250

No. of Poles
 02 2 Poles
 03 3 Poles
 ...
 24 24 Poles

Nonstandard colors
 Mins could apply

2	Pin	Copper Alloy
1	Body	PA66-30%GF UL9
ITEM	NAME OF PART	MATERIAL
DWG.	DATE	DATE
CHK.	DATE	DATE
APP.	DATE	DATE





ON-SHORE TECHNOLOGY, INC.

REV	△	SIGN	DESCRIPTION	CHK.	DATE

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View OSTOQ083250 on WIN SOURCE](#)
-  [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management