




SIM Connectors

TE Internal #: 1932768-1

2FF mini SIM, Push-Pull Type, 6 Position, 6 Loaded Positions, Signal, -25 – 70 °C [-13 – 158 °F], SIM Connectors, SIM Card Connectors

[View on TE.com >](#)

Connectors > PCB Connectors > Memory Card Connectors > SIM Card Connectors

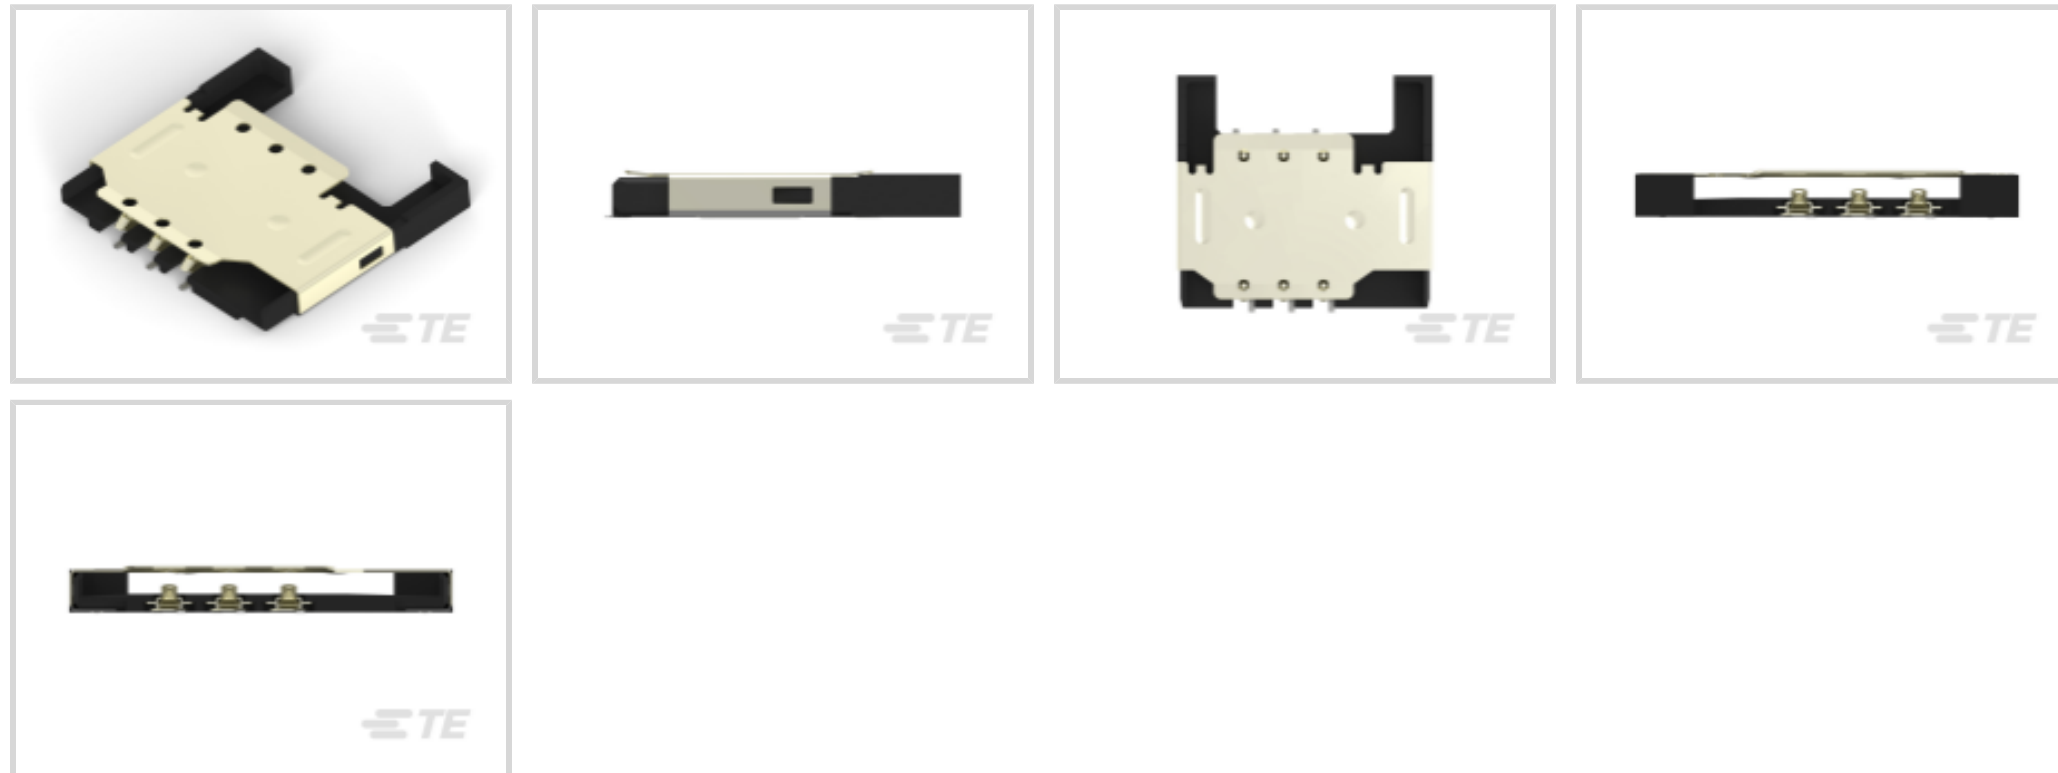

Compatible Card: **2FF mini SIM**
 SIM Card Product Type: **Push-Pull Type**
 Number of Positions: **6**
 Number of Loaded Positions: **6**
 Contact Current Rating (Max): **1.2 A**

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Card Stop	With
Compatible Card	2FF mini SIM
SIM Card Product Type	Push-Pull Type

Configuration Features

Card Detection Switch	Without
Card Insertion Style	Normal Insertion
Number of Positions	6
Number of Loaded Positions	6

Body Features

Primary Product Color	Black
Ejector Type	Push-Pull

Contact Features

Contact Base Material	Copper Alloy
-----------------------	--------------

Contact Mating Retention	Without
--------------------------	---------

Contact Current Rating (Max)	1.2 A
------------------------------	-------

Termination Features

Termination Method to PCB	Surface Mount
---------------------------	---------------

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Mating Alignment	With
------------------	------

Housing Features

Housing Material	Thermoplastic
------------------	---------------

Centerline (Pitch)	2.54 mm[.1 in]
--------------------	----------------

Dimensions

Profile Height from PCB	2 mm[.079 in]
-------------------------	---------------

Usage Conditions

Operating Temperature Range	-25 – 70 °C[-13 – 158 °F]
-----------------------------	---------------------------

Operation/Application

Durability Rating	5000 Cycles
-------------------	-------------

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Reel, Tape & Reel
------------------	-------------------

Packaging Quantity	1000
--------------------	------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
--	---



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Reflow solder capable to 260°C
---------------------------	--------------------------------



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




Also in the Series | SIM Connectors

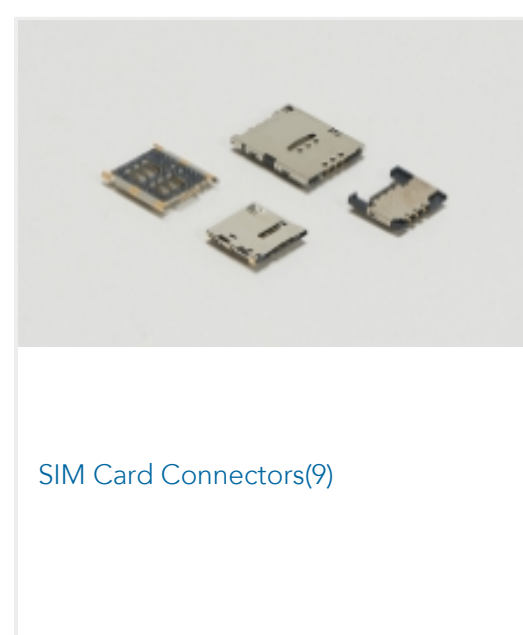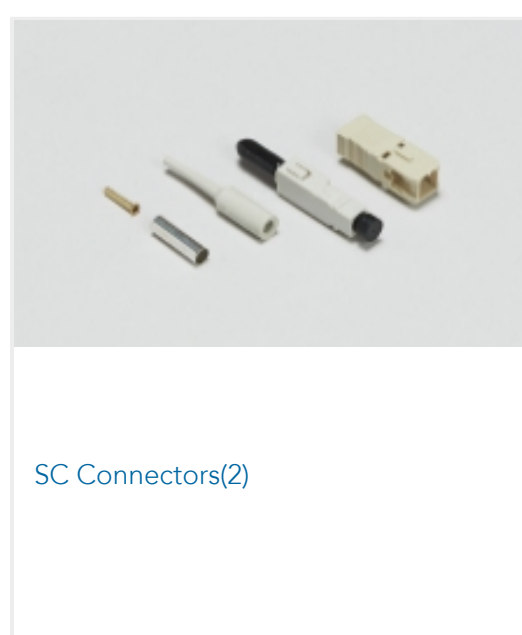

Customers Also Bought


TE Part #812860-000
202K163-3-0

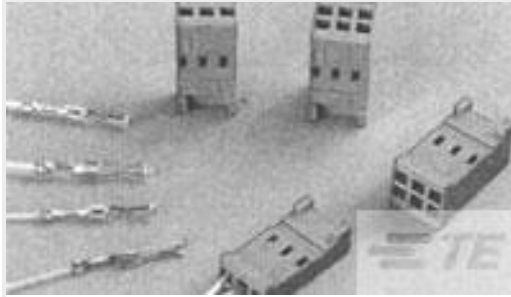

TE Part #188746-1
CONTACT REC HE13 COSI GOLD PLATED



TE Part #324015
TERMINAL,PIDG SPD FLG 12-10 10

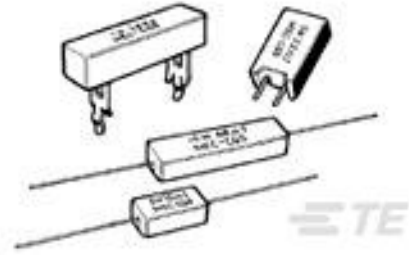

TE Part #2-1623788-5
SQM5 R22 5% (WIRE)



TE Part #2-1676481-3
CPF 0603 43R 0.1% 25PPM 1K RL



TE Part #3-1879336-1
CPF 0603 475R 1% 50PPM 1K RL



TE Part #6-2176092-1
RP 2A 0.25W 3K24 0.1% 25PPM 1K RL



TE Part #2311774-1
AMPL PLUG, HD22, R/A, 15P, THREADED



TE Part #5188578-1
Z-PACK/A M HDR.154P



TE Part #5787190-7
68 50SR R/A RCPT ASSY,RDSN L/F

Documents

SUPER LOW PROFILE 1.95SIM WITH FLANGE

English

Customer View Model

[ENG_CVM_CVM_1932768-1_A.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1932768-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1932768-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specification

English

Product Specification

1932768-1

2FF mini SIM, Push-Pull Type, 6 Position, 6 Loaded Positions, Signal, -25 – 70 °C [-13 – 158 °F], SIM Connectors, SIM Card Connectors



English

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View 1932768-1 on WIN SOURCE](#)

[TE Connectivity Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management