





**Features**

- 1 Space saving with ultra low profile
- 2 Reverse card insertion prevention design
- 3 Buckling prevention design
- 4 Card detection switch (Normally Open)
- 5 Easy inspection with exposed contact design

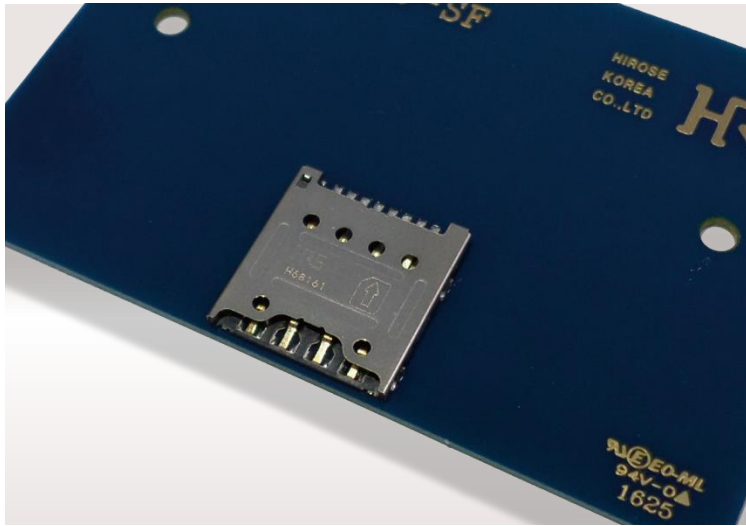


**Dimensions**

Unit : mm

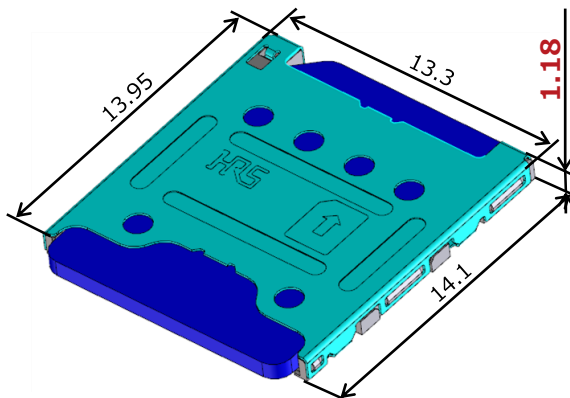

**Buckling prevention design**

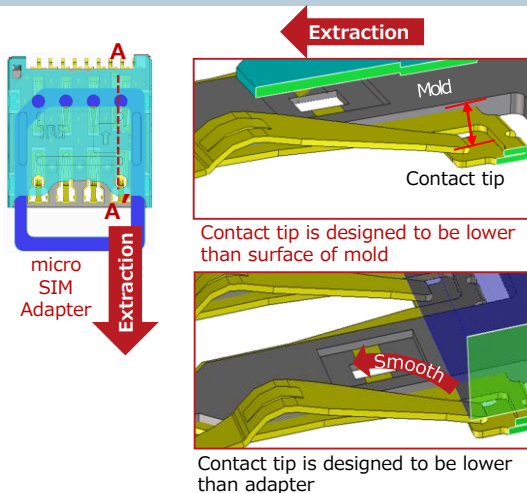

**When an adapter is inserted or extracted, it slides on the contact without buckling.**

**Specifications**

Contact Resistance	100mΩ Max.
Withstanding Voltage	500V AC for 1 minute
Mold Resistance	1,000MΩ Min. (500V DC)
Rated Current	0.5A
Rated Voltage	10V AC
Operating Temperature	-30°C to +85°C
Mating cycles	5,000 times

• RoHS compliant, Halogen-free product\*

\*This product satisfies halogen free requirements defined as 900ppm maximum chlorine, 900ppm maximum bromine, and 1500ppm maximum total of chlorine and bromine

※ Please contact Hirose's sales representative prior to adopting the products to in-vehicle devices.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View KP10BJ-8S-SF\(800\) on WIN SOURCE](#)
- ⊖ [Hirose Electric Co Ltd Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management