




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

	D:	23.0	± max
	T:	10.0	± max
	Lead Diameter	1.0	± nom
	S:	7.8	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	4.0	± max
	B:	9.20	± nom
	C:	7.60	± nom

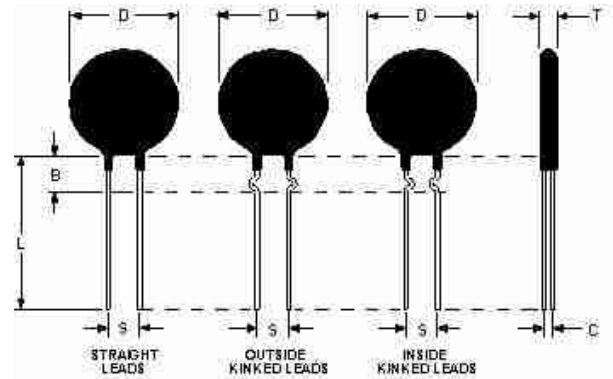

Electrical Specifications

	Resistance:	120.0 Ω	± 25 %
	Max Steady State Current upto 65°C:	3.00	A
	Max Rec. Energy Rating:	220	J
	Actual Failure Instantaneous Energy:	450	J
	Maximum Capacitance @ 120 VAC:	15,000	µf
	Maximum Capacitance @ 240 VAC:	3,820	µf
	Maximum Capacitance @ 440 VAC:	883	µf
	Maximum Capacitance @ 680 VAC:	440	µf
	Resistance @ 100% Max Current:	1.28	Ω
	Resistance @ 50% Max Current:	2.65	Ω
	Body Temperature at 100% Max Current:	165.00	°c
	Dissipation Constant:	75.4	mw/°c
	Thermal Time Constant:	124	Sec.
	Material Type (for Beta and Curve):	M	

MS22 12103	
Date: 02/05/2009	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MS2212103 on WIN SOURCE](#)

 [Ametherm Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management