
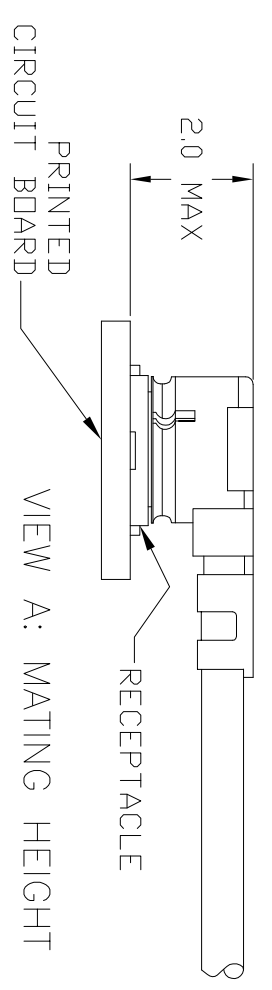


LOC	HT	DIST	OO	P	LTR	0	REVISIONS	DATE	DWN	APVD
							DESCRIPTION	29APR05	HXF	DF

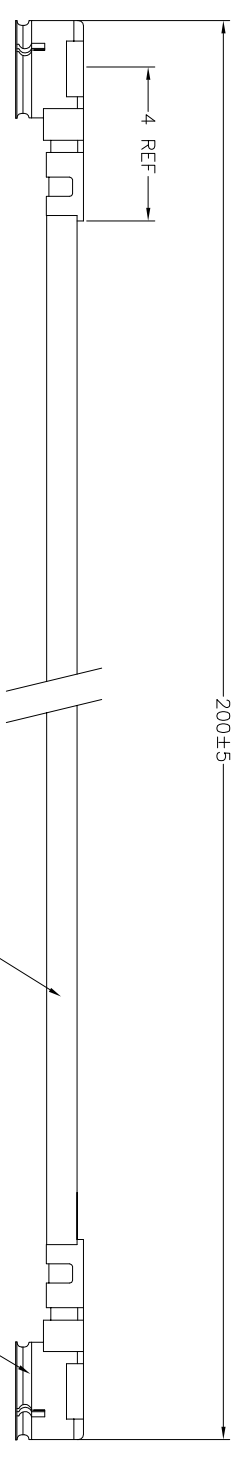

- NOTES:
- HIROSE COMPATIBLE, 2.0MM MATING HEIGHT.
 - 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS. HI-POT AT 150 VDC FOR 100ms
FREQUENCY RANGE: DC TO 6 GHz
VSWR 1.4:1 MAX
 - PRODUCT RATINGS:
TEMPERATURE: -40 TO +90 DEG.C
VOLTAGE: 60 VAC
CHARACTERISTIC IMPEDANCE: 50 OHMS
MATING DURABILITY: 30 CYCLES

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MM		0 PLG	±
		1 PLG	±
		2 PLG	±
		3 PLG	±
		4 PLG	±
		ANGLES	±
		FINISH	±



DWN	Hao Xiangfeng	29APR05
CHK	Fouli Zhou	29APR05
APVD	DENVER WILLSON	27MAR05
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		

AR	MM	MINIATURE COAXIAL CABLE, 0.80mm OD	2
2	PC	UMCC TYPE II PLUG	1
QTY UNIT		DESCRIPTION	ITEM



SIZE	A4	CAGE CODE	00779	DRAWING NO	1750108-2	RESTRICTED TO	
SCALE	1:1	SHEET	1	OF	1	REV	0

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 2015698-3 on WIN SOURCE](#)
-  [TE Connectivity Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management