


^{.40}
[.016 in] MAX.

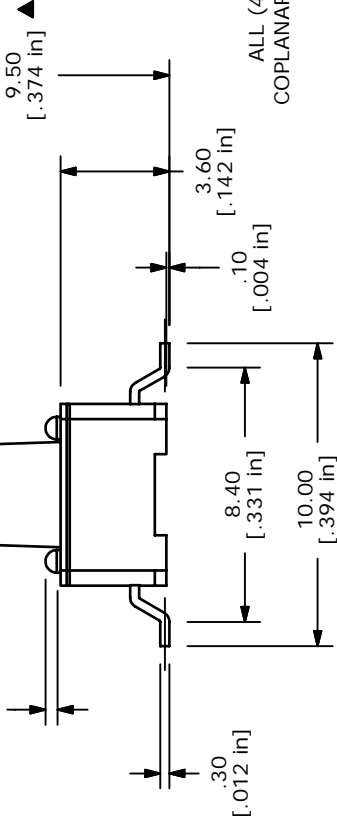

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X: X = ±0.4
X.XX = ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. RATING: 12VDC, 50mA
5. OPERATING FORCE: 160 ± 50 gms
6. TRAVEL: 0.25 ± .1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
9. SILVER CONTACTS
- ▲ 10. 2002/95/EC (ROHS) COMPLIANT
- ▲ 11. PACKAGING: TAPE AND REEL/500 PCS PER.
12. ▲ DENOTES CRITICAL PARAMETER

-A-

▲ ALL (4) TERMINALS
COPLANAR W/IN .10(.004")



A	17434	RELEASED FOR PRODUCTION	7/11/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL3301BF160QG	
SCALE 4:1	DATE 7/11/2007
DR	TN

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TL3301BF160QG on WIN SOURCE](#)

 [E-SWITCH](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management