




**THE DATASHEET OF
FMMD914TA**



SOT23 SILICON PLANAR F SWITCHING DIODE

ISSUE 2 - OCTOBER 1995

DIODE PIN CONNECTION

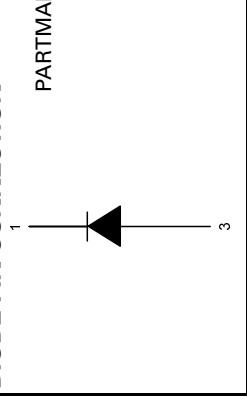

ABSOLUTE MAXIMUM RATINGS

PARAMETER
Working Peak Reverse Voltage
Average Rectified Forward Current at $T_{amb}=25^{\circ}C$
Repetitive Peak Forward Current
Power Dissipation at $T_{amb} = 25^{\circ}C$
Operating and Storage Temperature F



ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL
Reverse Breakdown Voltage	V_{BR}
Forward Voltage	V_F
Static Reverse Current	I_R
Reverse Recovery Time	t_{rr}
Total Capacitance	C_T
Forward Recovery Voltage	$V_{FM(REC)}$
Rectification Efficiency	η_r

Spice parameter data is available upon request.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View FMMD914TA](#) on WIN SOURCE
-  [Diodes Incorporated](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management