


G6J-Y

Surface-mounting Relay



Ultra-compact and Slim DPDT Relay

- Suitable for high-density mounting.(5.7 mm (W) × 10.6 mm (L) × 9 mm (H)).
- Dielectric strength of 1,500 VAC and an impulse withstand voltage of 2,500 V for 2 × 10 μs (conforms to Telcordia specifications (formerly Bellcore)).
- Conforms to FCC Part 68 (1,500 V, 10 × 160 μs).
- Single-winding latching models to save energy.
- Standard models conforms to UL/C-UL standards.

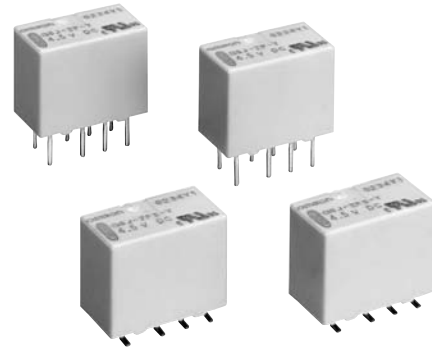

RoHS Compliant

Model Number Legend

G6J \square - \square \square - \square
1 2 3 4

1. Relay function

- None : Single-side stable relay
- U : Single-winding latching relay

2. Number of contact poles/ Contact form

2: 2-pole/DPDT (2c)

3. Terminal Shape

- P : PCB terminals
- FS: Surface-mounting terminals, short
- FL: Surface-mounting terminals, long

4. Special function

Y: Improved product for soldering heat resistance

Application Examples

- Communication equipment
- Test & measurement equipment
- Office automation equipment
- Audio-visual products
- Security equipment
- Building automation equipment
- Industrial equipment
- Amusement equipment

G
6
J
Y

Ordering Information

| Relay Function | Protective Structure | Contact form | Tube Packing | | | Tape Packing | | | |
|-------------------------|----------------------|--------------|--------------------------|--------------------|----------------------|--------------|--------------------|----------------------|--------------------------------------|
| | | | Model | Rated coil voltage | Minimum packing unit | Model | Rated coil voltage | Minimum packing unit | Minimum ordering unit (tape packing) |
| Single-side stable | Fully sealed | DPDT (2c) | G6J-2P-Y | 3 VDC | 50 pcs/tube | - | 3 VDC | 400 pcs/reel | 800 pcs/2 reels |
| | | | | 4.5 VDC | | | 4.5 VDC | | |
| | | | | 5 VDC | | | 5 VDC | | |
| | | | | 12 VDC | | | 12 VDC | | |
| | | | | 24 VDC | | | 24 VDC | | |
| | | | G6J-2FS-Y G6J-2FL-Y | 3 VDC | | | 3 VDC | | |
| | | | | 4.5 VDC | | | 4.5 VDC | | |
| | | | | 5 VDC | | | 5 VDC | | |
| | | | | 12 VDC | | | 12 VDC | | |
| | | | | 24 VDC | | | 24 VDC | | |
| Single-winding latching | Fully sealed | DPDT (2c) | G6JU-2P-Y | 3 VDC | 50 pcs/tube | - | 3 VDC | 400 pcs/reel | 800 pcs/2 reels |
| | | | | 4.5 VDC | | | 4.5 VDC | | |
| | | | | 5 VDC | | | 5 VDC | | |
| | | | | 12 VDC | | | 12 VDC | | |
| | | | | 24 VDC | | | 24 VDC | | |
| | | | G6JU-2FS-Y G6JU-2FL-Y | 3 VDC | | | 3 VDC | | |
| | | | | 4.5 VDC | | | 4.5 VDC | | |
| | | | | 5 VDC | | | 5 VDC | | |
| | | | | 12 VDC | | | 12 VDC | | |
| | | | | 12 VDC | | | 12 VDC | | |

Note 1. When ordering, add the rated coil voltage to the model number.

Example: G6J-2P-Y DC3
DC3 Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as \square VDC.

Note 2. When ordering tape packing, add "-TR" to the model number.

Be sure since "-TR" is not part of the relay model number, it is not marked on the relay case.

When ordering tape packing, minimum order unit is 2 reels (400 pcs × 2 = 800 pcs).

Note 3. Surface mounting terminal (SMT) standard models are shipped in moisture-proof package.

PCB terminal standard types do not require moisture proof packaging and therefore shipped in non-moisture-proof package.

■ Ratings

● Coil: Single-side Stable Relays (G6J-2P-Y, G6J-2FS-Y, G6J-2FL-Y)

| Item | Rated current (mA) | Coil resistance (Ω) | Must operate voltage (V) | Must release voltage (V) | Max. voltage (V) | Power consumption (mW) |
|---------------|--------------------|---------------------|--------------------------|--------------------------|------------------|------------------------|
| | | | % of rated voltage | | | |
| Rated voltage | | | | | | |
| 3 VDC | 48.0 | 62.5 | 75% max. | 10% min. | 150% | Approx. 140 |
| 4.5 VDC | 32.6 | 137.9 | | | | |
| 5 VDC | 28.9 | 173.1 | | | | |
| 12 VDC | 12.3 | 976.8 | | | | |
| 24 VDC | 9.2 | 2,600.5 | | | | |
| | | | | | | Approx. 230 |

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

● Coil: Single-winding Latching Relays (G6JU-2P-Y, G6JU-2FS-Y, G6JU-2FL-Y)

| Item | Rated current (mA) | Coil resistance (Ω) | Must set voltage (V) | Must reset voltage (V) | Max. voltage (V) | Power consumption (mW) |
|---------------|--------------------|---------------------|----------------------|------------------------|------------------|------------------------|
| | | | % of rated voltage | | | |
| Rated voltage | | | | | | |
| 3 VDC | 33.7 | 89.0 | 75% max. | 75% max. | 150% | Approx. 100 |
| 4.5 VDC | 22.0 | 204.3 | | | | |
| 5 VDC | 20.4 | 245.5 | | | | |
| 12 VDC | 9.0 | 1,329.2 | | | | |

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

● Contacts

| Item | Load | Resistive load |
|------------------------|------|------------------------------------|
| Contact type | | Bifurcated crossbar |
| Contact material | | Ag (Au-Alloy) |
| Rated load | | 0.3 A at 125 VAC, 1 A at 30 VDC |
| Rated carry current | | 1 A |
| Max. switching voltage | | 125 VAC, 110 VDC |
| Max. switching current | | 1 A |

■ Characteristics

| Item | Classification | Single-side stable | Single-winding latching |
|---|--|--|-----------------------------------|
| | Model | G6J-2P-Y, G6J-2FS-Y, G6J-2FL-Y | G6JU-2P-Y, G6JU-2FS-Y, G6JU-2FL-Y |
| Contact resistance *1 | | 100 mΩ max. | |
| Operating (set) time | | 3 ms max. | |
| Release (reset) time | | 3 ms max. | |
| Min. set/reset signal width | | – | 10 ms |
| Insulation resistance *2 | | 1,000 MΩ min. (at 500 VDC) | |
| Dielectric strength | Between coil and contacts | 1,500 VAC, 50/60 Hz for 1 min | |
| | Between contacts of different polarity | 1,000 VAC, 50/60 Hz for 1 min | |
| | Between contacts of the same polarity | 750 VAC, 50/60 Hz for 1 min | |
| Impulse withstand voltage | Between coil and contacts | 2,500 VAC, 2 × 10 μs | |
| | Between contacts of different polarity | 1,500 VAC, 10 × 160 μs | |
| | Between contacts of the same polarity | | |
| Vibration resistance | Destruction | 10 to 55 to 10 Hz 2.5 mm single amplitude (5 mm double amplitude) | |
| | Malfunction | 10 to 55 to 10 Hz 1.65 mm single amplitude (3.3 mm double amplitude) | |
| Shock resistance | Destruction | 1,000 m/s ² | |
| | Malfunction | 750 m/s ² | |
| Durability | Mechanical | 50,000,000 operations min. (at 36,000 operations/hour) | |
| | Electrical | 100,000 operations min. (with a rated load at 1,800 operations/hour) | |
| Failure rate (P level) (reference value) *3 | | 10 μA at 10 mVDC | |
| Ambient operating temperature | | -40 to 85°C (with no icing or condensation) | |
| Ambient operating humidity | | 5% to 85% | |
| Weight | | Approx. 1.0 g | |

Note: The above values are initial values.


*1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.

*2. The insulation resistance was measured with a 500 VDC Megger Tester applied to the same parts as those for checking the dielectric strength.


*3. This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 50 Ω. This value may vary depending on the operating frequency, operating conditions, expected reliability level of the relay, etc. Always double-check relay suitability under actual load conditions.

Engineering Data


Maximum Switching Capacity

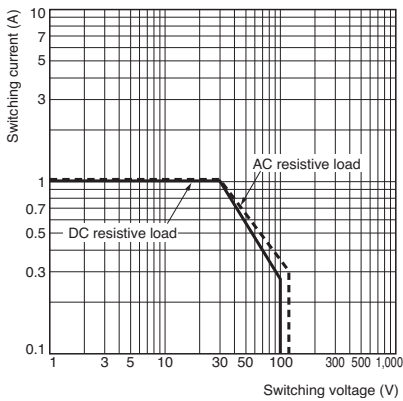

Durability

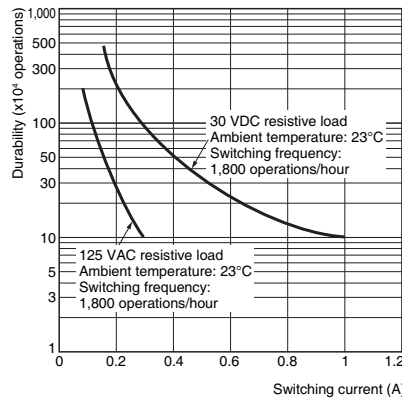


Ambient Temperature vs. Maximum Voltage

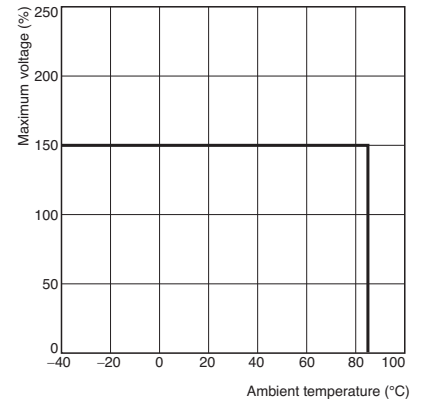


Note: "Maximum voltage" is the maximum voltage that can be applied to the Relay coil.


Ambient Temperature vs. Switching Current

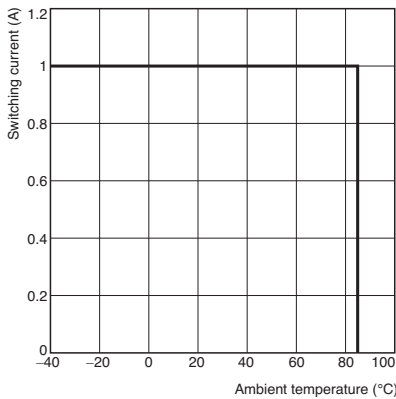

Ambient Temperature vs. Must Operate or Must Release Voltage

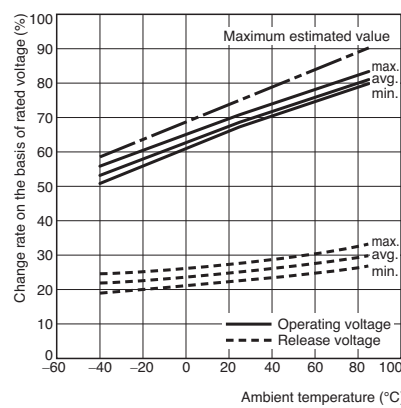


Shock Malfunction

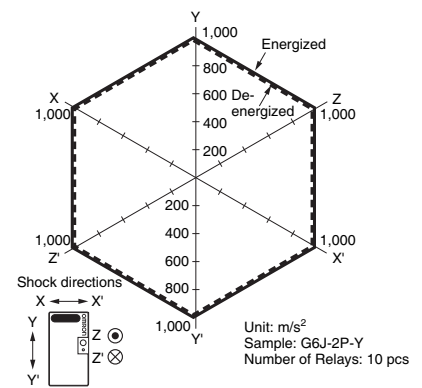


Test Conditions: Shock is applied in $\pm X$, $\pm Y$, and $\pm Z$ directions three times each with and without energizing the Relays to check the number of contact malfunctions.


Electrical Durability (with Operate and Release Voltage) *1

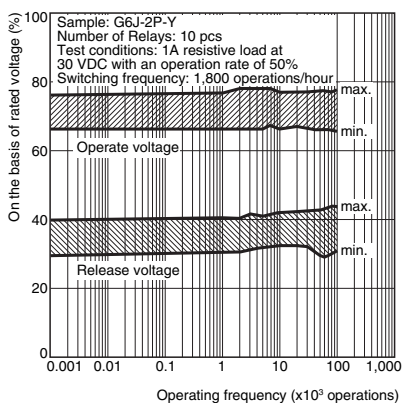


Electrical Durability (Contact resistance) *1

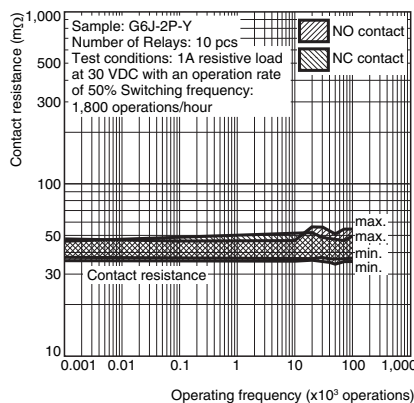


Contact Reliability Test (Contact resistance) *1, *2

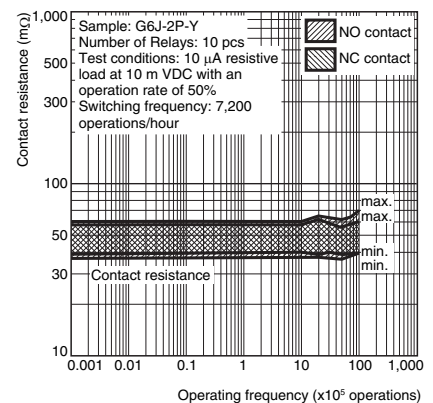

Mutual Magnetic Interference



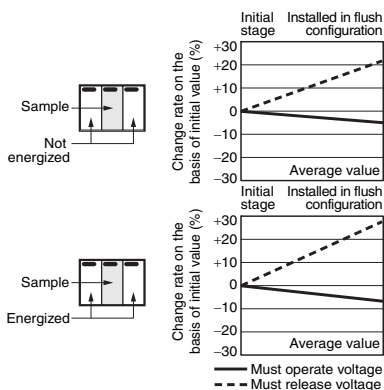


Mutual Magnetic Interference

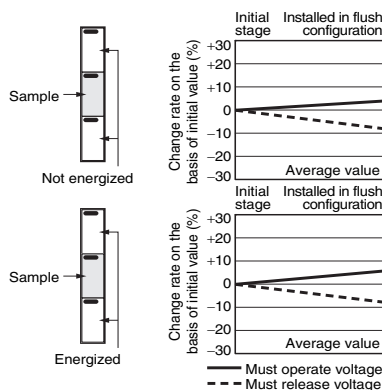


- *1. The tests were conducted at an ambient temperature of 23°C.
- *2. The contact resistance data are periodically measured reference values and are not values from each monitoring operation. Contact resistance values will vary according to the switching frequency and operating environment, so be sure to check operation under the actual operating conditions before use.


● External Magnetic Interference

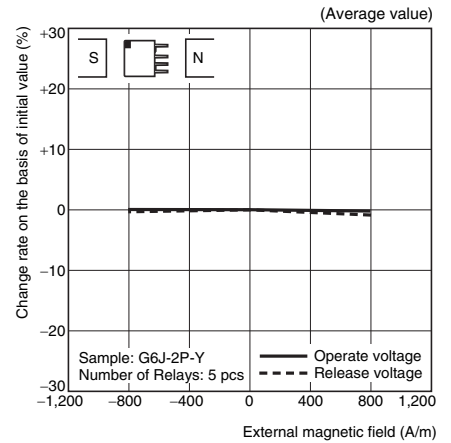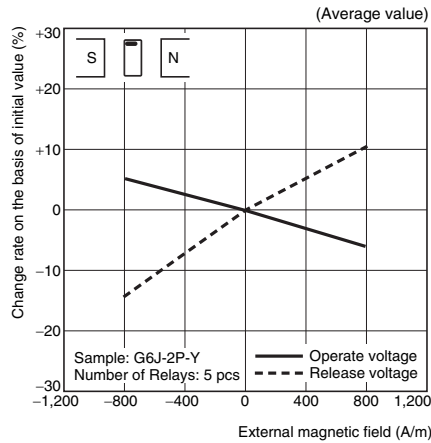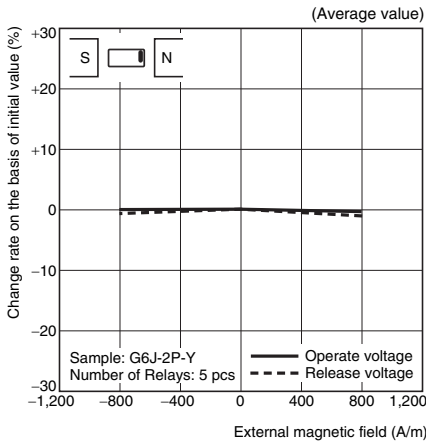


● High-frequency Characteristics (Isolation) *1, *2

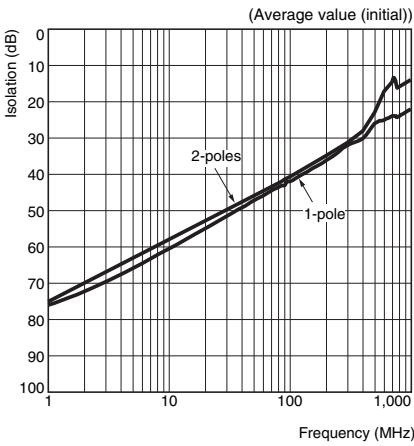


● High-frequency Characteristics (Insertion Loss) *1, *2

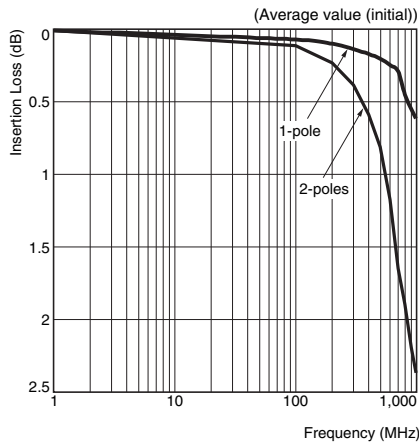


● High-frequency Characteristics (Return Loss, V.SWR) *1, *2

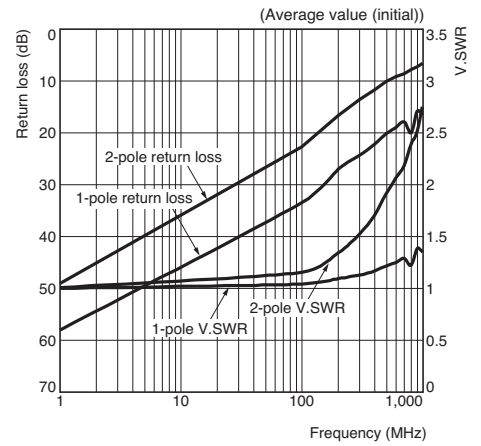


● Must Operate and Must Release Time Distribution *1

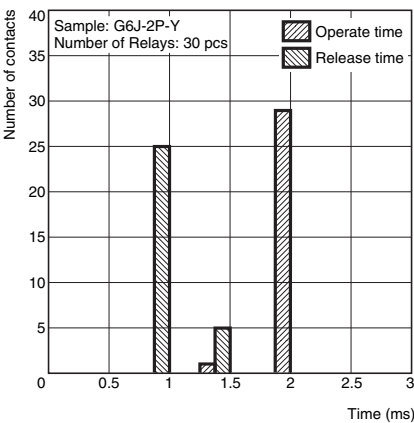

● Distribution of Bounce Time *1

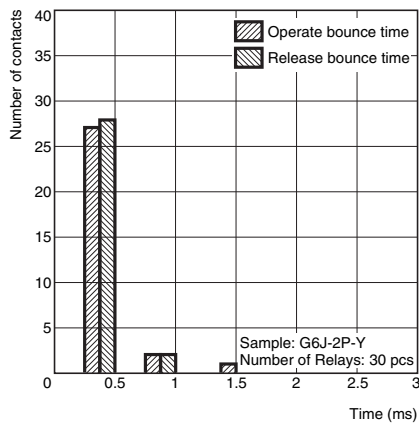

● Vibration Resistance

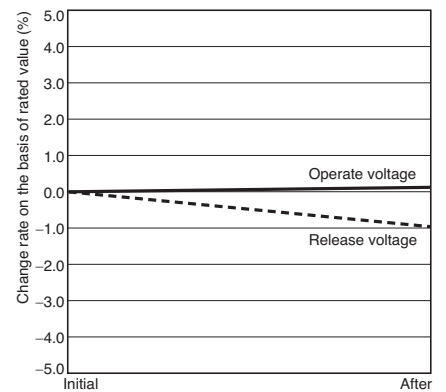



*1. The tests were conducted at an ambient temperature of 23°C.

*2. High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics, including endurance, in the actual machine before use.

■Dimensions


(Unit: mm)

PCB Terminals G6J-2P-Y G6JU-2P-Y

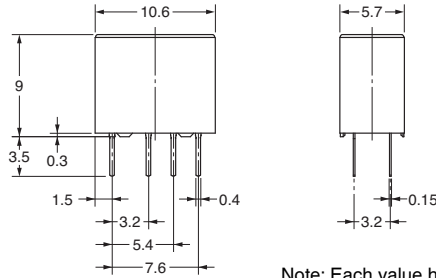


Note: Each value has a tolerance of ± 0.3 mm.


PCB Mounting Holes (BOTTOM VIEW) Tolerance ± 0.1 mm



Terminal Arrangement/ Internal Connections (BOTTOM VIEW)





G6JU-2P-Y




Note: Check carefully the coil polarity of the Relay.

Surface-mounting Terminals (Short) G6J-2FS-Y G6JU-2FS-Y




Note 1. Each value has a tolerance of ± 0.3 mm.
Note 2. The coplanarity of the terminals is 0.1 mm max.


Mounting Dimensions (TOP VIEW) Tolerance ± 0.1 mm



Terminal Arrangement/ Internal Connections (TOP VIEW)





G6JU-2FS-Y




Note: Check carefully the coil polarity of the Relay.

Surface-mounting Terminals (Long) G6J-2FL-Y G6JU-2FL-Y




Note 1. Each value has a tolerance of ± 0.3 mm.
Note 2. The coplanarity of the terminals is 0.1 mm max.


Mounting Dimensions (TOP VIEW) Tolerance ± 0.1 mm



Terminal Arrangement/ Internal Connections (TOP VIEW)



G6JU-2FL-Y



Note: Check carefully the coil polarity of the Relay.

Tube Packing and Tape Packing


Surface mounting terminal (SMT) standard models are shipped in moisture-proof package, and PCB terminal standard types do not require moisture proof packaging and therefore shipped in non-moisture-proof package.

Please refer to "Correct Use" for handling after opening moisture-proof packaging for Surface mounting terminal (SMT) models.

(1) Tube Packing

Relays in tube packing are arranged so that the orientation mark of each Relay is on the left side.

Always confirm that the Relays are in the correct orientation when mounting the Relays to the PCBs.

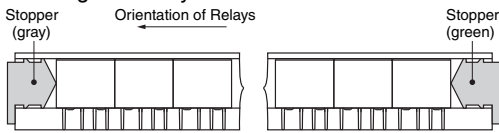

Tube length: 555 mm (stopper not included)

No. of Relays per tube: 50 pcs


(2) Tape Packing (Surface-mounting Terminal Relays)

When ordering Relays in tape packing, add the prefix "TR" to the model number, otherwise the Relays in tube packing will be provided.


Relays per reel: 400 pcs

Minimum ordering unit: 2 reels (800 pcs)

1. Direction of Relay Insertion

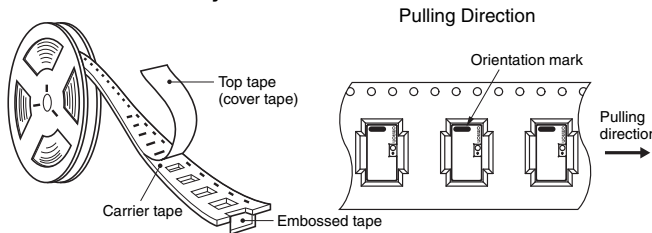


2. Reel Dimensions

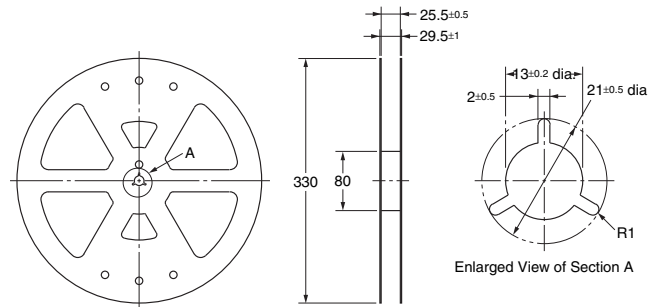

3. Carrier Tape Dimensions


G6J-2FS-Y, G6JU-2FS-Y, G6J-2FL-Y, G6JU-2FL-Y

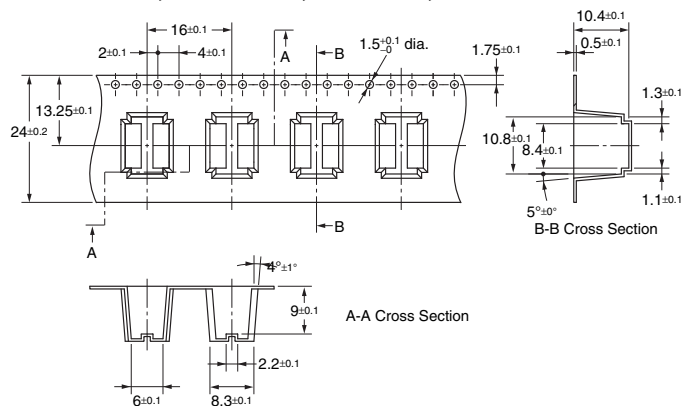

Recommended Soldering Method


●IRS Method (for Surface-mounting Terminal Relays)

(1) IRS Method (Mounting Solder: Lead)

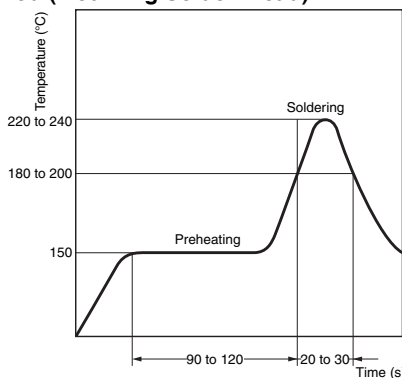


(The temperature profile indicates the temperature on the circuit board.)

(2) IRS Method (Mounting Solder: Lead-free)

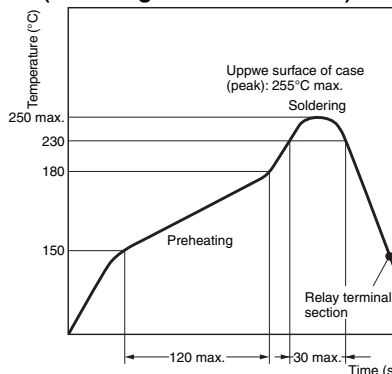


(The temperature profile indicates the temperature on the PCB.)

- The thickness of cream solder to be applied should be between 150 and 200 μm on OMRON's recommended PCB pattern.
- In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left-hand side.

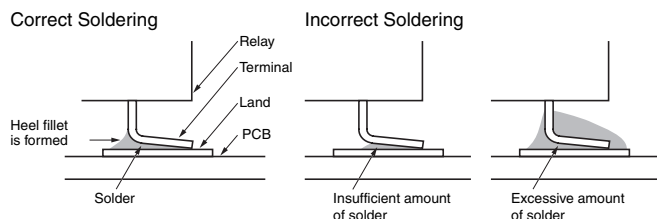

Visually check that the Relay is properly soldered.

Approved Standards

UL/C-UL Recognized.  (File No.E41515)

| Contact form | Coil rating | Contact rating | Number of test operations |
|--------------|---|--|---------------------------|
| DPDT (2c) | G6J-2P-Y, 2FS-Y, 2FL-Y: 3 to 24 VDC G6JU-2P-Y, 2FS-Y, 2FL-Y: 3 to 24 VDC | 1 A, 30 VDC at 40°C 0.5 A, 60 VDC at 40°C 0.3 A, 125 VAC at 40°C | 6,000 |

Precautions

●Please refer to “PCB Relays Common Precautions” for correct use.

Correct Use

●Long Term Current Carrying


Under a long-term current carrying without switching, the insulation resistance of the coil goes down gradually due to the heat generated by the coil itself. Furthermore, the contact resistance of the Relay will gradually become unstable due to the generation of film on the contact surfaces. A Latching Relay can be used to prevent these problems. When using a single-side stable relay, the design of the fail-safe circuit provides protection against contact failure and open coils.

●Handling of Surface-mounting Relays


- Use the Relay as soon as possible after opening the moistureproof package. (As a guideline, use the Relay within one week at 30°C or less and 60% RH or less.) If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the Relay after opening the moisture-proof package, place it into the original package and sealed the package with adhesive tape.
- When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the relay in a cold cleaning bath immediately after soldering.

●Claw Securing Force During Automatic Insertion

During automatic insertion of Relays, make sure to set the securing force of the claws to the following values so that the Relay characteristics will be maintained.



Direction A: 4.90 N max.
Direction B: 9.80 N max.
Direction C: 9.80 N max.

 Secure the claws to the area indicated by shading.

●Environmental Conditions During Operation, Storage, and Transportation

Protect the Relays from direct sunlight and keep the Relays under normal temperature, humidity, and pressure.

●Mounting Latching Relays

Make sure that the vibration or shock that is generated from other devices, such as Relays in operation, on the same panel and imposed on the Latching Relays does not exceed the rated value, otherwise the Latching Relays that have been set may be reset or vice versa. The Latching Relays are reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relays may be set accidentally. Be sure to apply a reset signal before use.

●Maximum Allowable Voltage

- The maximum voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum voltage also involves important restrictions which include the following:
 - Must not cause thermal changes or deterioration of the insulating material.
 - Must not cause damage to other control devices.
 - Must not cause any harmful effect on people.
 - Must not cause fire.
- Therefore, be sure not to exceed the maximum voltage specified in the catalog.
- As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than the maximum voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase thus affecting characteristics such as electrical life and resulting in the deterioration of coil insulation.

●Coating

Relays mounted on PCBs may be coated or washed. Do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relays.

●Other Handling



Please don't use the relay if it suffered the dropping shock. Because there is a possibility of something damage for initial performance.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View G6JU-2P DC5 on WIN SOURCE](#)
-  [Omron Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management