



**THE DATASHEET OF
H3AAS-3018G**



1

2

3

4

5

6

7


A

2,54xNo.of Positions+4,70±0,25

2,54xNo.of Positions+0,90±0,20

2,54xNo.of Positions-2,54±0,15

2,54±0,10

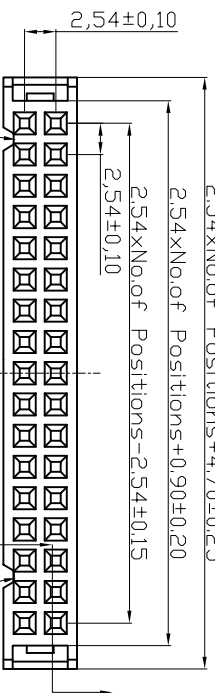

C

7,00±0,15

M(2)

N(2)

②



- 6P-8P Without Slot "M" and "N"
- 10P-12P With Slot "M", Without Slot "N"
- 14P-64P With Slot "M" and "N"

- ELECTRICAL**
- Current Rating : 3AMP
 - Withstand Voltage : 1000V AC/DC
 - Contact Resistance : 20mΩ max
 - Insulation Resistance: 1000MΩ min
- ENVIRONMENTAL**
- Operation Temperature: -40°C to +105°C
 - Packing: Tray

D

1,27±0,10

1,27xNo.of Contacts-1,27±0,20




Section A-A

E

F

2,54xNo.of Positions+4,70±0,25

3,50



G

RoHS compliant

Scale 1:1

TOLERANCE

X.X ±0,40

X.XX ±0,25

X.XXX ±0,15

Angle ±3°

1

2

3

4

5

6

7

Customer-No.

Name

Date

Drawn

28.03.2013

Drawn

②

Dean

21.12.2009

Dean

①

Drawn

Modification

Date

Name

Approved

28.03.2013

Winnie

ASSMANN WSW-No.

AWP xx-8x40-T

ASSMANN

WSSW/ components

ASS 2261A CO

rev02

Replace

Sheet

H

G

F

E

D



C

B

A

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View H3AAS-3018G on WIN SOURCE](#)
-  [Assmann WSW Components](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management