



**THE DATASHEET OF
HC8-100-R**



Description

- Surface mount inductors, 4.0mm height, designed for higher speed switch mode applications requiring low voltage and high current
- 155°C maximum total operating temperature
- Design utilizes high temperature powder iron material with a non-organic binder to eliminate thermal aging
- Inductance offering expanded for applications requiring higher inductance.
- Inductance Range from 0.175 uH to 47.3 uH
- Current Range from 39.0 to 2.4 Amps
- Frequency Range 1kHz to 500kHz



Applications

- Next generation microprocessors
- High current DC-DC converters
- VRM, multi-phase buck regulator
- PC, Workstations, Routers
- Telecom soft switches, Base Stations

Environmental Data

- Storage temperature range: -40°C to +155°C
- Operating ambient temperature range: -40°C to +155°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds max.

Packaging

- Supplied in tape and reel packaging, 800 parts per reel


Part Number	Rated Inductance μH	OCL (1) nominal $\pm 20\%$ μH	Irms (2) Amperes (Typ.)	Isat (3) Amperes 15% rolloff	Isat (4) Amperes 30% rolloff	DCR (m Ω) max. @ 20°C	Volts (5) μSec (V μS) (ref.)
HC8-R15-R	0.15	0.175	39.0	43	76	0.80	1.5
HC8-R39-R	0.39	0.390	28.3	26	45	1.55	2.5
HC8-R75-R	0.75	0.766	18.8	18.5	32.7	3.40	3.5
HC8-1R2-R	1.2	1.32	16.0	14.4	25.5	4.70	4.5
HC8-1R9-R	1.9	1.90	12.4	11.8	20.9	7.7	5.5
HC8-2R6-R	2.6	2.65	10.2	10.0	17.7	11.4	6.5
HC8-3R5-R	3.5	3.52	8.50	8.7	15.3	16.5	7.5
HC8-4R5-R	4.5	4.52	8.00	7.7	13.5	18.6	8.5
HC8-5R6-R	5.6	5.65	6.70	6.9	12.1	26.3	9.5
HC8-6R9-R	6.9	6.90	6.40	6.2	10.9	28.9	10.5
HC8-8R2-R	8.2	8.27	5.50	5.7	10.0	39.6	11.5
HC8-100-R	10.0	9.77	5.20	5.2	9.2	43.6	12.5
HC8-150-R	15.0	15.02	4.10	4.2	7.4	68.6	15.5
HC8-220-R	22.0	21.40	3.40	3.5	6.2	99.5	18.6
HC8-330-R	33.0	31.65	2.70	2.9	5.1	154	22.6
HC8-470-R	47.0	47.28	2.20	2.4	4.2	237	27.6

- 1) Test Parameters: 100KHz, 1.0Vrms
- 2) Irms Amperes for approximately ΔT of 40°C above 85°C ambient
- 3) Isat Amperes Peak for approximately 15% rolloff (@20°C)
- 4) Isat Amperes Peak for approximately 30% rolloff (@20°C)
- 5) Applied Volt-Time product (V- μS) across the inductor. This value represents the applied V- μS at operating frequency necessary to generate additional core loss which contributes to the 40°C temperature rise. De-rating of the Irms is required to prevent excessive temperature rise. The 100% V- μS rating is equivalent to a ripple current Ip-p of 20% of Isat (30% rolloff option).

It is recommended that the temperature of the part not exceed 155°C under worst case operating conditions verified in the end application.


Part number definition:
 HC8-XXX-R
 HC8 = Product code and size
 XXX = Inductance value in uH.
 R = Decimal point. If no R is present, third character = #of zeros
 -R suffix indicates RoHS compliant

Mechanical Diagrams

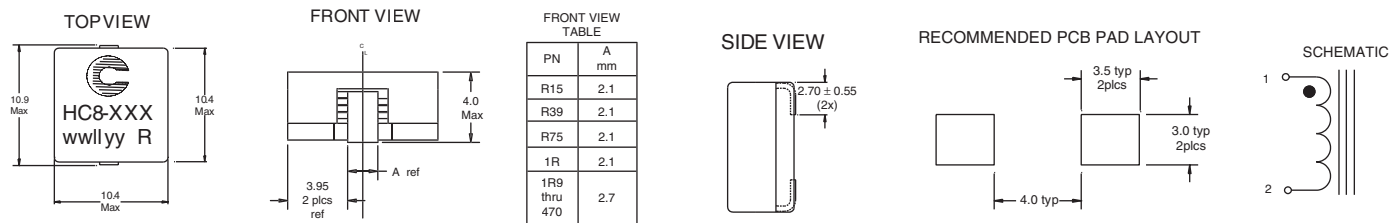

wwllyy = Date code R = Revision level
 xxx = Inductance value


Packaging Information

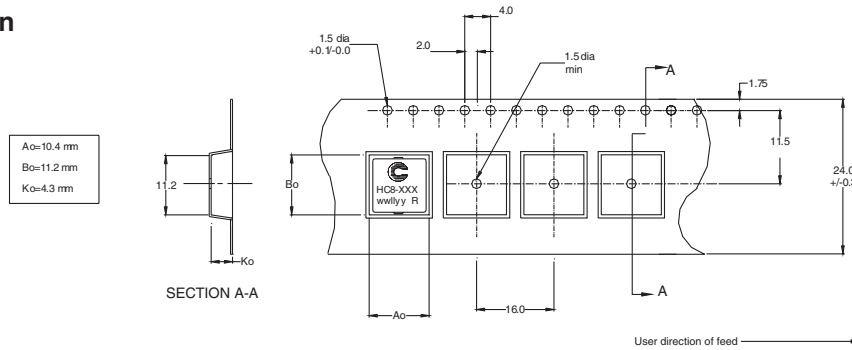

Dimensions in Millimeters


Inductance Characteristics

OCL vs Isat

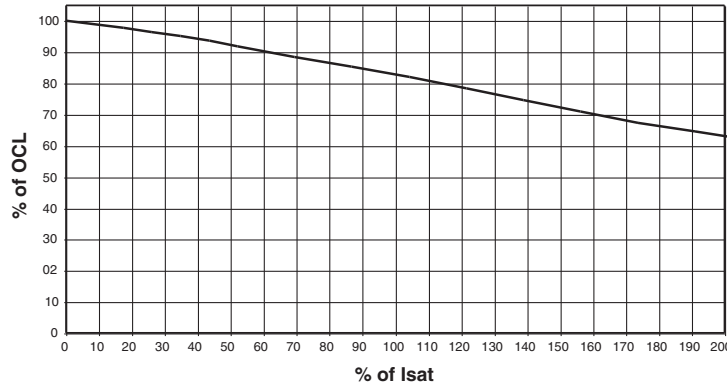



Core Loss

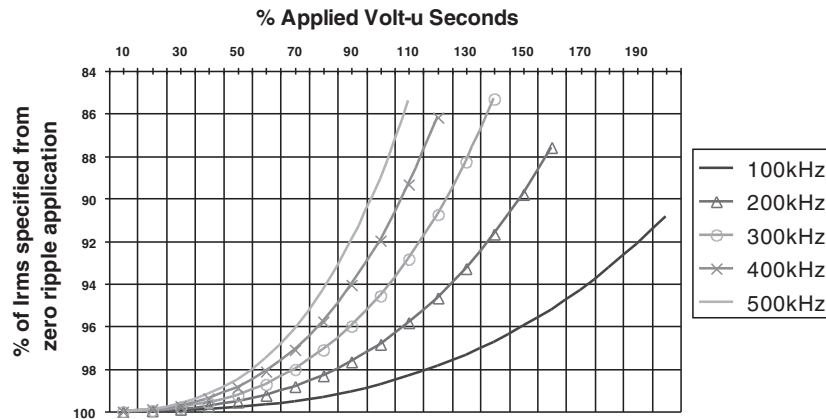Irms DERATING WITH CORE LOSS



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HC8-100-R on WIN SOURCE](#)
-  [Eaton Bussmann Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management