




**THE DATASHEET OF
E5288-32G145-L**



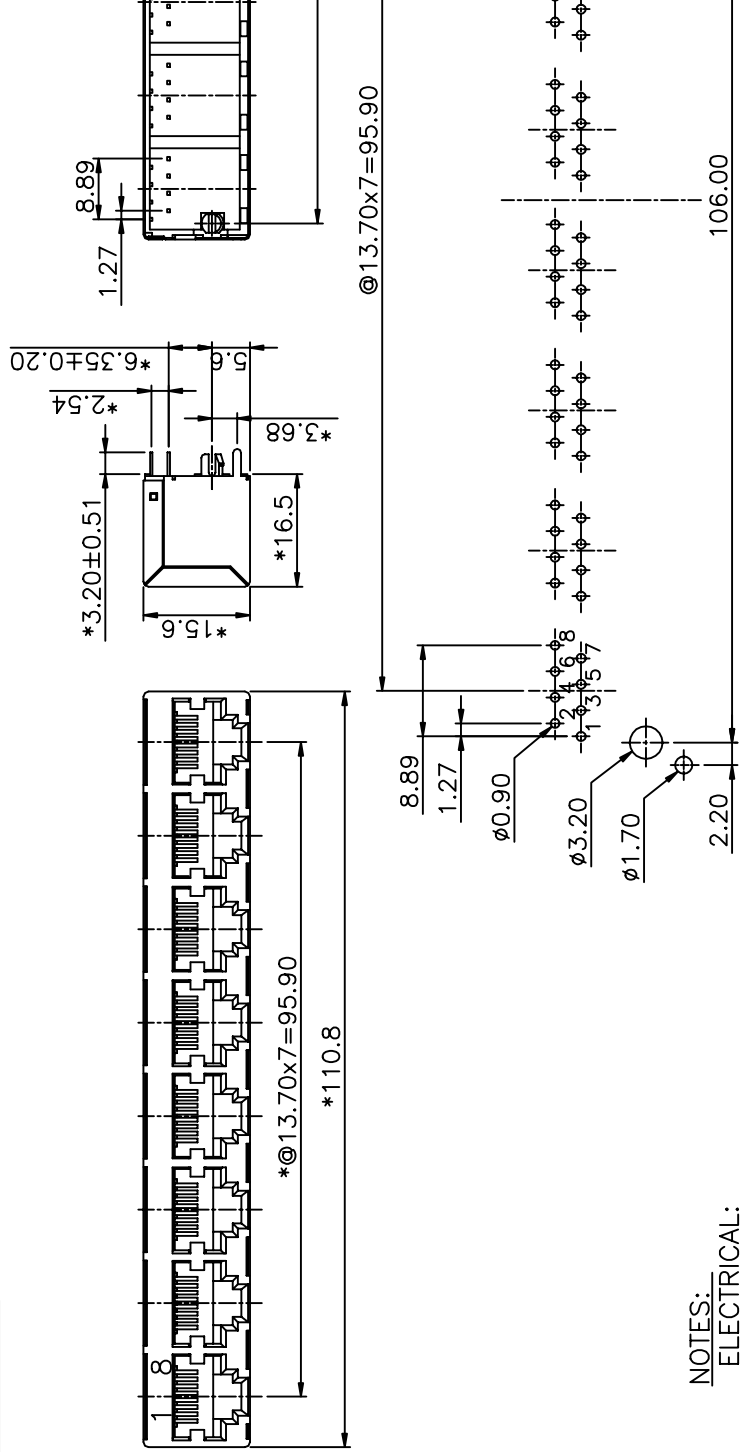

PC Board L
Component Site

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60HZ, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : PBT+GF30% UL94V-0. COLOR:BLACK
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE $t=0.35\text{mm}$.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- 2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.
- Δ 3. WAVE SOLDERING TEMPERATURE: 230°C TO 250°C 3~5 SECONDS.
- 4. RoHS COMPLIANT.


MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

RoHS PART NUMBER: E5288-32G14X-L

- 1- 3u" 2- 6u"
- 3- 15u" 4- 30u"
- 5- 50u"

DFTD SKYCHEN		DATE 07
CHND ASSEMBLY	DATE 2006	DATE
MFO	DATE	DATE 2006
APPL. ANGLE	DATE 2006	
MATERIAL :		
QTY :		
FINISH :		
SCALE : 5:4		

TOLERANCES EXCEPT AS NOTED	
MM	±
.0 ± 0.2	±
.00 ± 0.15	±
.000 ± 0.075	±
ANGLES ± 0.5	



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View E5288-32G145-L on WIN SOURCE](#)

 [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management