THE DATASHEET OF

E5288-YCCB02-L

www.win-source.net 0086-755-83957316

D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
⚠		NOTES MODIFY	Among 10/22/04	

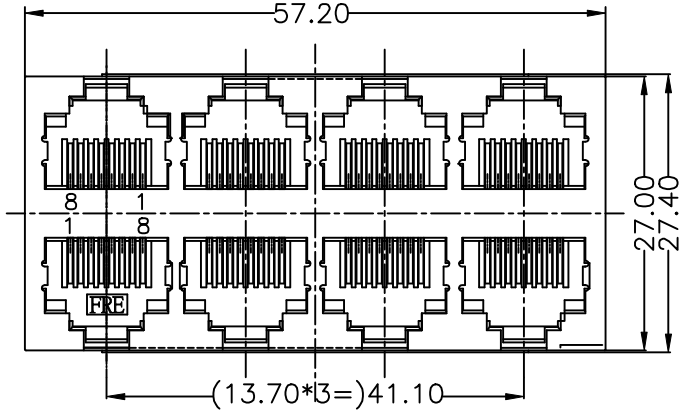

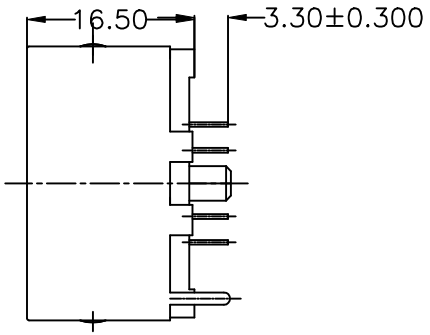

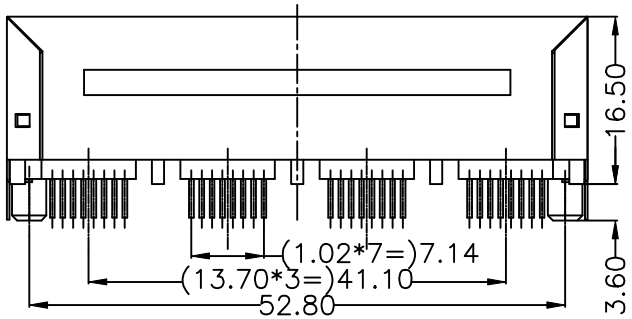

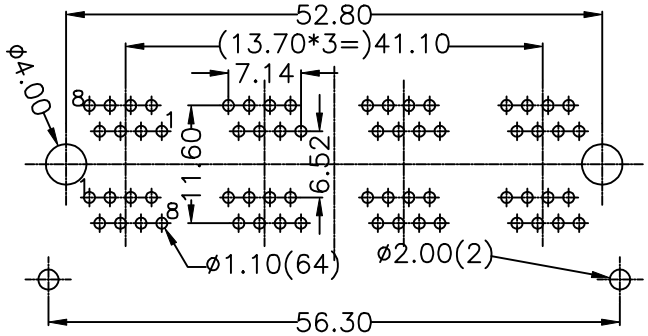

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+30%
2. CONTACT MATERIAL : PHOSPHOR BRONZE ø.46mm.
3. ⚠ PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. ⚠ OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: E5288-YXCBOX
- Y: 1- 3U" 2- 6U" 3- 15U" 4- 30U" 5- 50U"
- X: N- W/O LOGO C- W/ FRE LOGO

MM (INCH)	DFTO CZH	DATE 1/31/02'	FULL RISE ELECTRONIC CO., LTD
TOLERANCES EXCEPT AS NOTED	CHKD SAMMY	DATE 2004/11/17	
MM .0 ±0.20 ± .00 ±0.15 ± .000 ±0.075 ±	MFO	DATE	TITLE 2X4 TOP ENTRY PCB JACK
	APPVL LUSHENG	DATE 2004/11/17	
ANGLES ±	MATERIAL :		DRAWING NO. GE523013 / PART NO. SEE NOTE
	QT'Y :		SIZE A3 REV 1
THIRD ANGLE PROJECTION	FINISH :		
DETACHED LISTS	SCALE : 2:1		DO NOT SCALE DRAWING SHEET X OF Y

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View E5288-YCCB02-L on WIN SOURCE
- Pulse Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management