


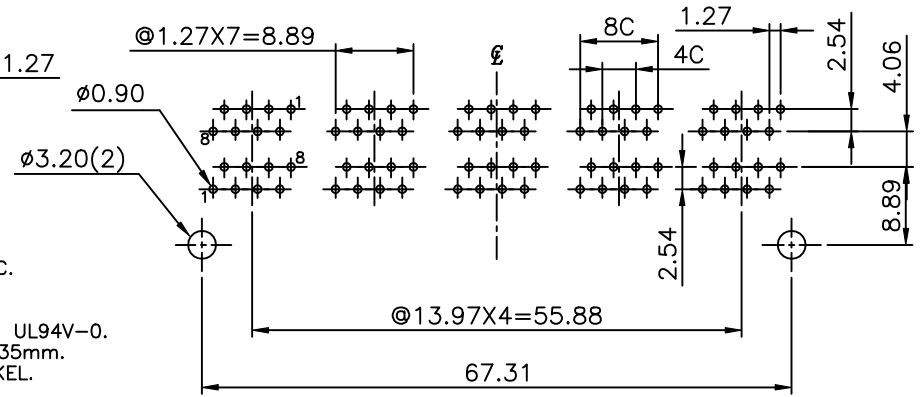


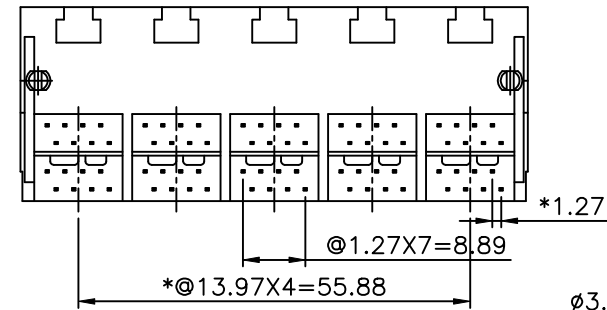

**THE DATASHEET OF
E5908-0TD044-L**

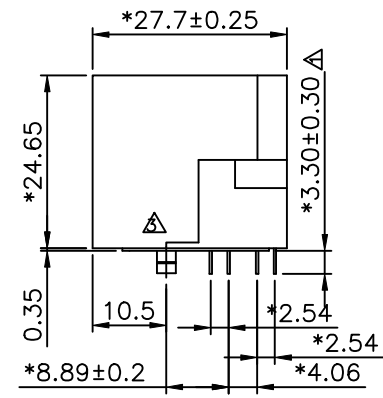

| REVISION RECORD | | | | |
|-----------------|-----|----------------|----------------------|------|
| REV | ECO | DESCRIPTION | DRFT | CHKD |
| △ | | EC DIM | Ming-Wei 04/15/02 | |
| △ | | ADD PART NO. | Qianpu 6/19/04 | |
| △ | | MODIFY DRAWING | QIULER 12/03/04 | |
| △ | | MODIFY DRAWING | QIULER 01/25/05 | |

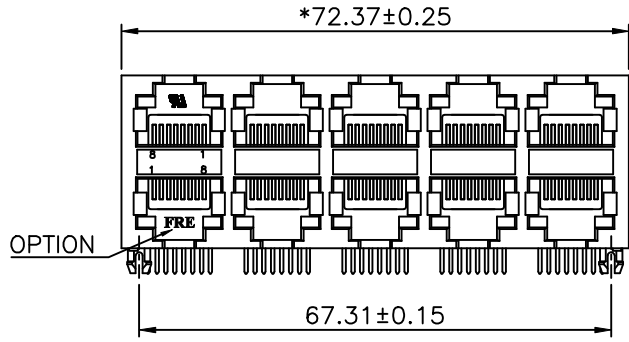

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:


- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. 163191

PART NUMBER: E590X-OTDOXX

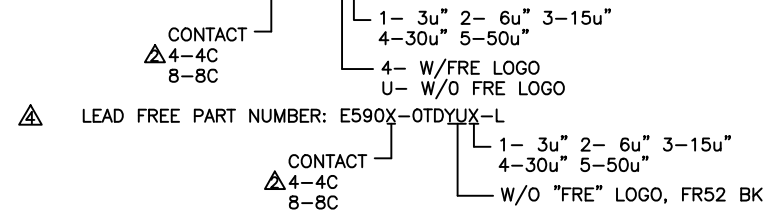

PC Board Layout Component Side Shown
PC Board Thickness=1.6mm

| | | | |
|----------------|----------------------------|----------------------|-----------------|
| DETACHED LISTS | ← MM (INCH) → | DFTO Ming-Wei | DATE 04/09/2002 |
| | TOLERANCES EXCEPT AS NOTED | CHKD QIANPU | DATE2006/1/25 |
| | | MFO | DATE |
| | | APPVLU SHENG | DATE2006/1/25 |
| | MM | MATERIAL : | |
| | .0 ±0.2 ± | ANGLES ± 0.5 | |
| | .00 ±0.15 ± | FINISH : | |
| | .000 ±0.075 ± | SCALE : 1.5 : 1 | |
| | THIRD ANGLE PROJECTION | DO NOT SCALE DRAWING | |

| | | | |
|---------------------------------------------------|--|--------------|-------|
| FULL RISE ELECTRONIC CO., LTD | | | |
| TITLE STAMPED PIN III STACKED GANGED JACK, 2X5 | | | |
| DRAWING NO. GE593B55 | | SIZE A3 | REV 4 |
| /PART NO. SEE NOTE | | SHEET 1 OF 1 | |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View E5908-0TD044-L on WIN SOURCE](#)

 [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management