




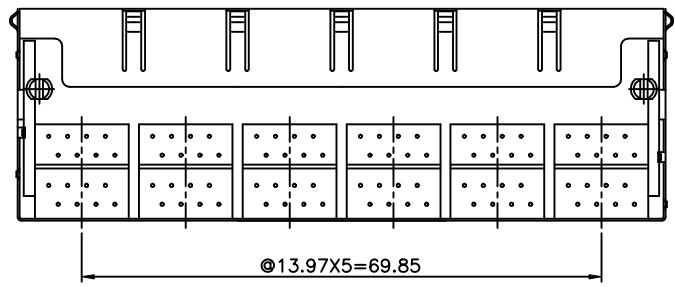

**THE DATASHEET OF  
E5908-57E153-L**

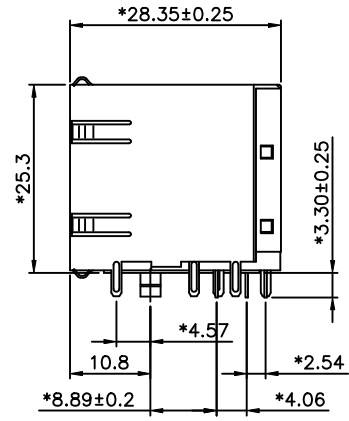

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

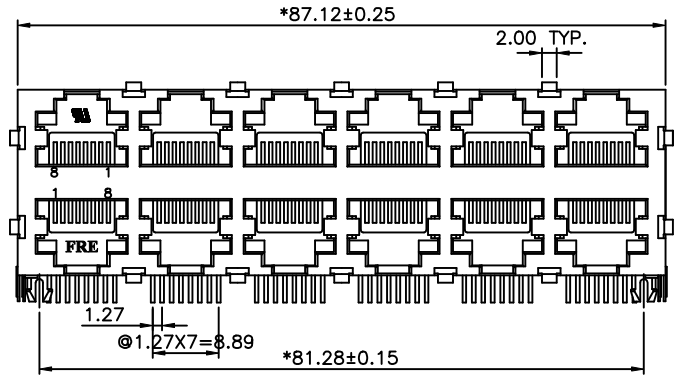

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.
3. WAVE SOLDERING TEMPERRATURE 255°C~265°C (5~10 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER: E5908-5XE15X-L

Shield Plating: 1- Tin, 7- Nickel, Q- GOLD  
 Gold Thickness: 1- 3u", 2- 6u", 3-15u", 4-30u", 5-50u"

PC Board Layout  
Component Side Shown

DETACHED LISTS	MM (INCH)	DFTO JAMY	DATE 7/26/05	<b>FULL RISE ELECTRONIC CO., LTD</b>  TITLE RJ45 STACKED GANGED JACK, 2X6  DRAWING NO. GE593267-LA      SIZE A3      REV 0 /PART NO. SEE NOTE  DO NOT SCALE DRAWING      SHEET OF	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±0.2 .00 ±0.15 .000 ±0.075	APPL	DATE		
ANGLES ± 0.5	MATERIAL :		MATERIAL :		
THIRD ANGLE PROJECTION	FINISH :		SCALE : 1.5 : 1		

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View E5908-57E153-L on WIN SOURCE](#)

 [Pulse Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management