



**THE DATASHEET OF
KT4-BK**





KT4

Inches (Millimeters)

SPECIFICATIONS

Rating: 30A, 600V; UL/CSA
Center spacing: .250" (6.35)
Number of poles: 4
Circuits per foot: 48
Circuit jumper: JN4, 4 circuits
Wire size: AWG #10-22 CU
Screw size: #6-32
Mounting options: Base Mount
Mounting screws recommended every 12 circuits.
Marking tape: MTC6
Torque rating: 18 in/lb max.
Operating temperature: 105°C

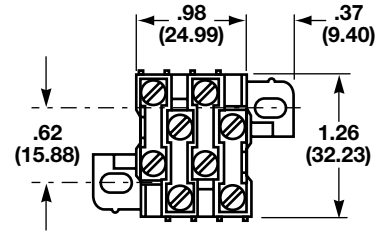



BIF document: 1413



For complete specification data, call Bussmann Information Fax ~ 314.527.1450

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View KT4-BK on WIN SOURCE](#)
-  [Eaton Bussmann Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management