



**THE DATASHEET OF  
2450BP18C100CE**



# “High Frequency Ceramic Solutions”

## 2.45 GHz Band Pass Filter

P/N 2450BP18C100C


Detail Specification Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss	Ripple
2450BP18C100C	2450 ± 50	2.5 dB max	40 dB @ 900-928 MHz 30 dB @ 1.2 - 1.8 GHz 25 dB @ 2.1 GHz 35 dB @ 4.8 - 5.0 GHz 40 dB @ 7.2 - 7.5 GHz	9.5 dB min.	0.7 dB min.

Input Power	Group Delay	Impedance	Operating Temperature Range
500 mWatt max	5 nsec max	50 Ω	-40 to +85°C


### Mechanical Dimensions

	L	W	T	a	b	c	d
Inches	0.126 ± .006	0.063 ± .006	0.033 ± .004	0.075 ± .006	0.020 ± .006	0.012 ± .008	0.026 ± .008
mm	3.2 ± 0.15	1.6 ± 0.15	0.85 ± 0.1	1.9 ± 0.15	0.5 ± 0.15	0.30 ± 0.2	0.65 ± 0.2

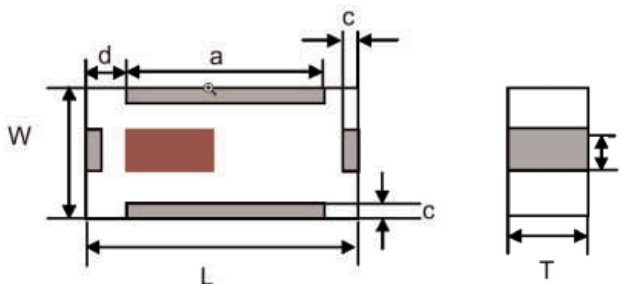


### Terminal Configuration

No.	Function	No.	Function
1	GND	3	GND
2	OUT	4	IN



### Mounting Considerations

Mount device with brown mark facing up.  
Line width should be designed to provide 50Ω impedance matching characteristics.

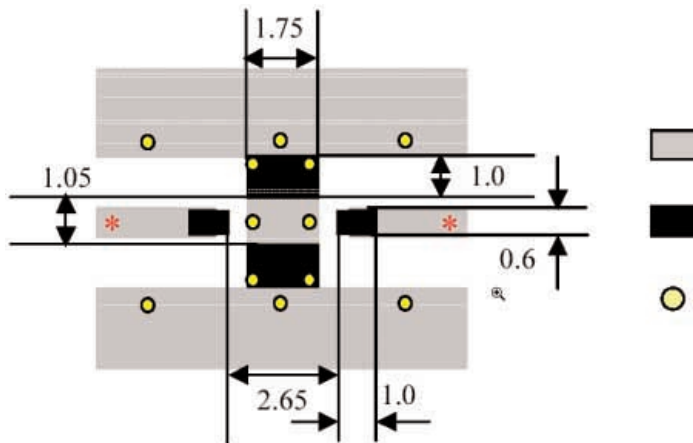

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.


# “High Frequency Ceramic Solutions”

## 2.45 GHz Band Pass Filter

P/N 2450BP18C100C

Detail Specification Page 1 of 2

Typical Transmission / Return Loss: P/N 2450BP18C100C

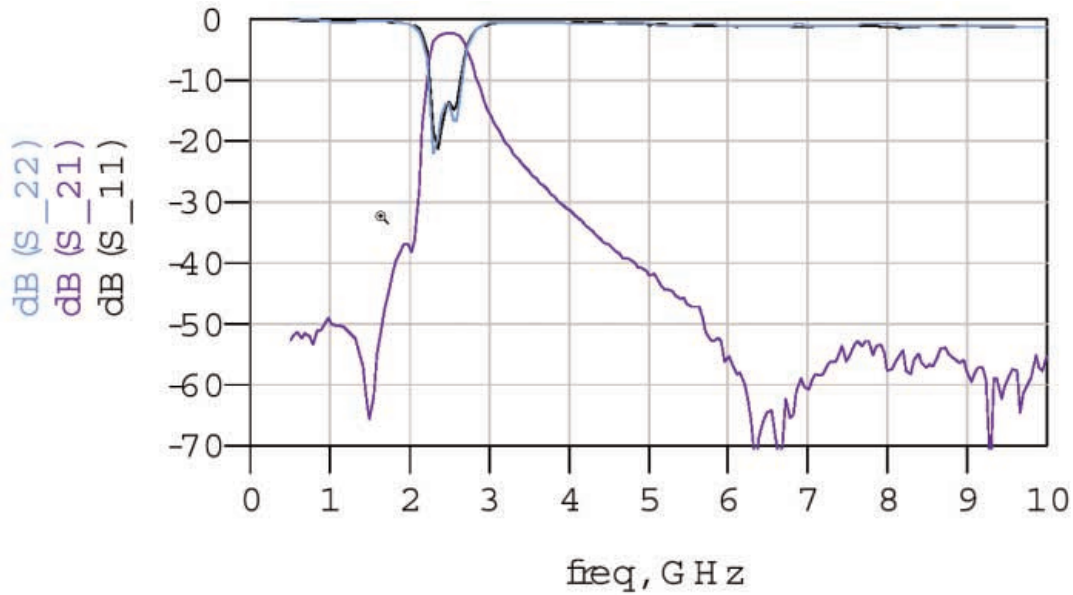

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2450BP18C100CE](#) on WIN SOURCE

 [Johanson Technology Inc.](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management