



**THE DATASHEET OF  
ICS91718CMLFT**





## Low EMI, Spread Modulating, Clock Generator

### Features:

- ICS91718 is a Spread Spectrum Clock targeted for Mobile PC and LCD panel applications. Generates an EMI optimized clock signal (EMI peak reduction of 7-14 dB on 3rd-19th harmonics) through use of Spread Spectrum techniques.
- ICS91718 operates with input frequencies at 14.318 - 80 MHz.
- Spread modulation frequency range is 20kHz to 40kHz.
- Spread percentage/type programming through I<sup>2</sup>C.

### Specifications:

- Supply Voltages: V<sub>DD</sub> = 3.3V ±0.3V
- Cyc to Cyc jitter: <150ps
- Output duty cycle 45/55%
- Guarantees +85°C operational condition
- 8-pin SOIC (150 mil) package

### Pin Configuration

|                 |   |   |                  |
|-----------------|---|---|------------------|
| CLKIN           | 1 | 8 | PD#*             |
| VDD             | 2 | 7 | SCLK             |
| GND             | 3 | 6 | SDATA            |
| **CLKOUT/FS_IN0 | 4 | 5 | REF_OUT/FS_IN1** |

### 8-pin SOIC & TSSOP

Notes:


\* Internal pull-up resistor

\*\* Internal pull-down resistor

### Input Select Functionality

| FS_IN1 | FS_IN0 | MHz                          | SPREAD %            |
|--------|--------|------------------------------|---------------------|
| 0      | 0      | 14.318 in<br>48.00 out       | -1.0% down sprd     |
| 0      | 1      | 14.318 in<br>66.66 out       | -1.0% down sprd     |
| 1      | 0      | 48.00 in/out<br>66.66 in/out | -1.0% down sprd     |
| 1      | 1      | 48.00 in/out<br>66.66 in/out | +/-1.0% center sprd |

### Block Diagram

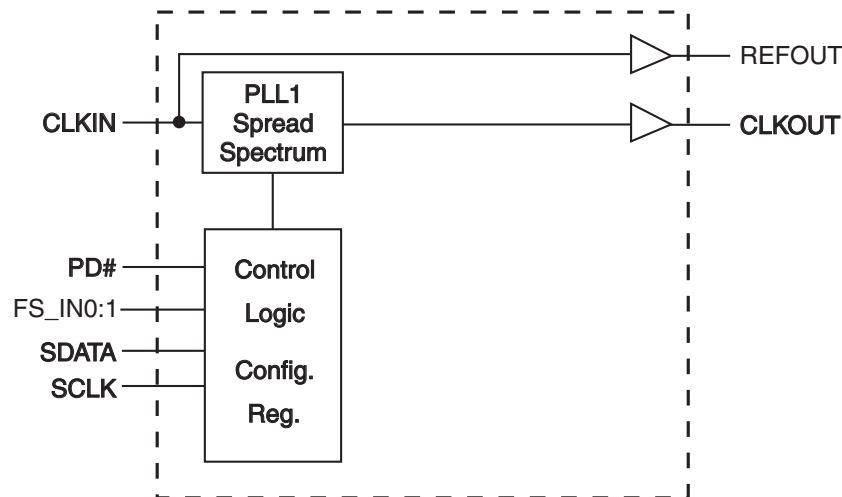



---

### Pin Descriptions

| PIN # | PIN NAME         | PIN TYPE | DESCRIPTION   |
|-------|------------------|----------|---|
| 1     | CLKIN            | INPUT    | Input clock   |
| 2     | VDD              | POWER    | Power supply, nominal 3.3V  |
| 3     | GND              | POWER    | Ground pin.   |
| 4     | **CLKOUT/FS_IN0  | I/O      | CLKOUT modulated clock output<br>FS_IN0 latched input, selects modulation percentage/type   |
| 5     | REF_OUT/FS_IN1** | I/O      | REF_OUT, unmodulated reference clock output<br>FS_IN1 latched input, selects modulation percentage/type   |
| 6     | SDATA            | I/O      | Data pin for I2C circuitry 5V tolerant  |
| 7     | SCLK             | INPUT    | Clock pin of I2C circuitry 5V tolerant  |
| 8     | PD#*             | INPUT    | Asynchronous active low input pin used to power down the device into a low power state. The internal clocks are disabled and the VCO and the crystal are stopped. The latency of the power down will not be greater than 1.8ms. |

\* Internal Pull-Up Resistor

\*\* Internal Pull-Down Resistor



**Table 1: Frequency Configuration Table  
(See I2C Byte 0)**

|                          | FS4 | FS3 | FS2 | FS1 | FS0  | Sprd Type                 | Sprd % |
|--------------------------|-----|-----|-----|-----|------|---------------------------|--------|
| 14in/48out               | 0   | 0   | 0   | 0   | 0    | DOWN<br>SPREAD<br>(-)     | 0.80   |
|                          | 0   | 0   | 0   | 0   | 1    |                           | 1.00   |
|                          | 0   | 0   | 0   | 1   | 0    |                           | 1.25   |
|                          | 0   | 0   | 0   | 1   | 1    |                           | 1.50   |
|                          | 0   | 0   | 1   | 0   | 0    |                           | 1.75   |
|                          | 0   | 0   | 1   | 0   | 1    |                           | 2.00   |
|                          | 0   | 0   | 1   | 1   | 0    | 2.50                      |        |
|                          | 0   | 0   | 1   | 1   | 1    | CENTER<br>SPREAD<br>(+/-) | 0.60   |
|                          | 0   | 1   | 0   | 0   | 0    |                           | 1.00   |
|                          | 0   | 1   | 0   | 0   | 1    |                           | 1.25   |
| 0                        | 1   | 0   | 1   | 0   | 1.50 |                           |        |
| 14in/66out               | 0   | 1   | 1   | 0   | 0    | DOWN<br>SPREAD<br>(-)     | 1.25   |
|                          | 0   | 1   | 1   | 0   | 1    |                           | 1.00   |
|                          | 0   | 1   | 1   | 1   | 0    |                           | 1.50   |
|                          | 0   | 1   | 1   | 1   | 1    |                           | 2.00   |
| 48in/48out<br>66in/66out | 1   | 0   | 0   | 0   | 0    | DOWN<br>SPREAD<br>(-)     | 0.80   |
|                          | 1   | 0   | 0   | 0   | 1    |                           | 1.00   |
|                          | 1   | 0   | 0   | 1   | 0    |                           | 1.25   |
|                          | 1   | 0   | 0   | 1   | 1    |                           | 1.50   |
|                          | 1   | 0   | 1   | 0   | 0    |                           | 1.75   |
|                          | 1   | 0   | 1   | 0   | 1    |                           | 2.00   |
|                          | 1   | 0   | 1   | 1   | 0    |                           | 2.50   |
|                          | 1   | 0   | 1   | 1   | 1    | 3.00                      |        |
|                          | 1   | 1   | 0   | 0   | 0    | CENTER<br>SPREAD<br>(+/-) | 0.30   |
|                          | 1   | 1   | 0   | 0   | 1    |                           | 0.40   |
|                          | 1   | 1   | 0   | 1   | 0    |                           | 0.50   |
|                          | 1   | 1   | 0   | 1   | 1    |                           | 0.60   |
|                          | 1   | 1   | 1   | 0   | 0    |                           | 0.80   |
|                          | 1   | 1   | 1   | 0   | 1    |                           | 1.00   |
| 1                        | 1   | 1   | 1   | 0   | 1.25 |                           |        |
| 1                        | 1   | 1   | 1   | 1   | 1.50 |                           |        |

For 14.318 in 48.008 out default is...00001  
 For 14.318 in 66.66 out default is..01101  
 For 48/48 and 66/66 default is.....10001



## General I<sup>2</sup>C serial interface information

The information in this section assumes familiarity with I<sup>2</sup>C programming. For more information, contact ICS for an I<sup>2</sup>C programming application note.

### How to Write:

- Controller (host) sends a start bit.
- Controller (host) sends the write address D4<sub>(H)</sub>
- ICS clock will **acknowledge**
- Controller (host) sends a dummy command code
- ICS clock will **acknowledge**
- Controller (host) sends a dummy byte count
- ICS clock will **acknowledge**
- Controller (host) starts sending first byte (Byte 0) through byte 6
- ICS clock will **acknowledge** each byte **one at a time**.
- Controller (host) sends a Stop bit

| How to Write:             |                      |
|---------------------------|----------------------|
| Controller (Host)         | ICS (Slave/Receiver) |
| Start Bit                 |                      |
| Address D4 <sub>(H)</sub> |                      |
|                           | <b>ACK</b>           |
| Dummy Command Code        |                      |
|                           | <b>ACK</b>           |
| Dummy Byte Count          |                      |
|                           | <b>ACK</b>           |
| Byte 0                    |                      |
|                           | <b>ACK</b>           |
| Byte 1                    |                      |
|                           | <b>ACK</b>           |
| Byte 2                    |                      |
|                           | <b>ACK</b>           |
| Byte 3                    |                      |
|                           | <b>ACK</b>           |
| Byte 4                    |                      |
|                           | <b>ACK</b>           |
| Byte 5                    |                      |
|                           | <b>ACK</b>           |
| Byte 6                    |                      |
|                           | <b>ACK</b>           |
| Byte 7                    |                      |
|                           | <b>ACK</b>           |
| Stop Bit                  |                      |

### How to Read:

- Controller (host) will send start bit.
- Controller (host) sends the read address D5<sub>(H)</sub>
- ICS clock will **acknowledge**
- ICS clock will send the **byte count**
- Controller (host) acknowledges
- ICS clock sends first byte (**Byte 0**) through **byte 7**
- Controller (host) will need to acknowledge each byte
- Controller (host) will send a stop bit

| How to Read:              |                      |
|---------------------------|----------------------|
| Controller (Host)         | ICS (Slave/Receiver) |
| Start Bit                 |                      |
| Address D5 <sub>(H)</sub> |                      |
|                           | <b>ACK</b>           |
|                           | <b>Byte Count</b>    |
| ACK                       |                      |
|                           | <b>Byte 0</b>        |
| ACK                       |                      |
|                           | <b>Byte 1</b>        |
| ACK                       |                      |
|                           | <b>Byte 2</b>        |
| ACK                       |                      |
|                           | <b>Byte 3</b>        |
| ACK                       |                      |
|                           | <b>Byte 4</b>        |
| ACK                       |                      |
|                           | <b>Byte 5</b>        |
| ACK                       |                      |
|                           | <b>Byte 6</b>        |
| ACK                       |                      |
|                           | <b>Byte 7</b>        |
| Stop Bit                  |                      |

### Notes:

1. The ICS clock generator is a slave/receiver, I<sup>2</sup>C component. It can read back the data stored in the latches for verification. **Read-Back will support Intel PIIX4 "Block-Read" protocol.**
2. The data transfer rate supported by this clock generator is 100K bits/sec or less (standard mode)
3. The input is operating at 3.3V logic levels.
4. The data byte format is 8 bit bytes.
5. To simplify the clock generator I<sup>2</sup>C interface, the protocol is set to use only "**Block-Writes**" from the controller. The bytes must be accessed in sequential order from lowest to highest byte with the ability to stop after any complete byte has been transferred. The Command code and Byte count shown above must be sent, but the data is ignored for those two bytes. The data is loaded until a Stop sequence is issued.
6. At power-on, all registers are set to a default condition, as shown.



| BYTE  | Affected Pin |               |  | TYPE | Bit Control      |     | PWD |
|-------|--------------|---------------|--|------|------------------|-----|-----|
|       | 0            | Pin #         | Name   |      | Control Function | 0   |     |
| Bit 7 | -            | N/A           | FS0  | RW   | See ROM TABLE    |     | 1   |
| Bit 6 | -            | N/A           | FS1  | RW   |                  |     | 0   |
| Bit 5 |              | N/A           | FS2  | RW   |                  |     | 0   |
| Bit 4 |              | N/A           | FS3  | RW   |                  |     | 0   |
| Bit 3 |              | N/A           | FS4  | RW   |                  |     | 0   |
| Bit 2 |              | N/A           | PD# Tri_Sate   | RW   | Hi-Z             | LOW | 1   |
| Bit 1 |              | N/A           | Spread Enable  | RW   | OFF              | ON  | 1   |
| Bit 0 |              | HW/SW Control | Spread Spectrum Control<br>FS 2:4 Hard/Software Select | RW   | HW               | SW  | 0   |

| BYTE  | Affected Pin |                 |                   | TYPE | Bit Control      |        | PWD |
|-------|--------------|-----------------|-------------------|------|------------------|--------|-----|
|       | 1            | Pin #           | Name              |      | Control Function | 0      |     |
| Bit 7 | 5            | REF_OUT         | REF_OUT ENABLE    | RW   | Disable          | Enable | 1   |
| Bit 6 | 5            | REF_OUT         | Slew Rate REF-OUT | RW   | Nominal          | Fast   | 1   |
| Bit 5 |              | FS_IN1 Readback | FS_IN1 Readback   | RW   | -                | -      | 1   |
| Bit 4 |              | FS_IN0 Readback | FS_IN0 Readback   | RW   | -                | -      | 1   |
| Bit 3 | 4            | CLK_OUT         | Slew Rate CLK-OUT | RW   | Nominal          | Fast   | 1   |
| Bit 2 | 4            | CLK_OUT         | CLK_OUT_Enable    | RW   | Disable          | Enable | 1   |
| Bit 1 |              | Reserved        | Reserved          | R    | -                | -      | 1   |
| Bit 0 |              | Reserved        | Reserved          | R    | -                | -      | 1   |

| BYTE  | Affected Pin |          |          | TYPE | Bit Control      |        | PWD |
|-------|--------------|----------|----------|------|------------------|--------|-----|
|       | 2            | Pin #    | Name     |      | Control Function | 0      |     |
| Bit 7 | x            | -        | RESERVED | -    | -                | -      | 1   |
| Bit 6 | x            | RESERVED | RESERVED | RW   | Disable          | Enable | 1   |
| Bit 5 | x            | RESERVED | RESERVED | RW   | Disable          | Enable | 1   |
| Bit 4 | x            | RESERVED | RESERVED | RW   | Disable          | Enable | 1   |
| Bit 3 | x            | RESERVED | RESERVED | RW   | Disable          | Enable | 1   |
| Bit 2 | x            | RESERVED | RESERVED | RW   | Disable          | Enable | 1   |
| Bit 1 | x            | RESERVED | RESERVED | RW   | Disable          | Enable | 1   |
| Bit 0 | x            | RESERVED | RESERVED | RW   | Disable          | Enable | 1   |



| BYTE     | Affected Pin |          |                  | TYPE | Bit Control |             |     |
|----------|--------------|----------|------------------|------|-------------|-------------|-----|
|          | Pin #        | Name     | Control Function |      | 0           | 1           | PWD |
| <b>3</b> |              |          |                  |      |             |             |     |
| Bit 7    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable      | 1   |
| Bit 6    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable      | 1   |
| Bit 5    | X            | RESERVED | RESERVED         | RW   | Freerun     | Not Freerun | 1   |
| Bit 4    | X            | RESERVED | RESERVED         | RW   | Freerun     | Not Freerun | 1   |
| Bit 3    | x            | RESERVED | RESERVED         | RW   | Freerun     | Not Freerun | 1   |
| Bit 2    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable      | 1   |
| Bit 1    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable      | 1   |
| Bit 0    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable      | 1   |

| BYTE     | Affected Pin |          |                  | TYPE | Bit Control |        |     |
|----------|--------------|----------|------------------|------|-------------|--------|-----|
|          | Pin #        | Name     | Control Function |      | 0           | 1      | PWD |
| <b>4</b> |              |          |                  |      |             |        |     |
| Bit 7    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 6    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 5    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 4    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 3    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 2    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 1    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 0    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |

| BYTE     | Affected Pin |          |                  | TYPE | Bit Control |        |     |
|----------|--------------|----------|------------------|------|-------------|--------|-----|
|          | Pin #        | Name     | Control Function |      | 0           | 1      | PWD |
| <b>5</b> |              |          |                  |      |             |        |     |
| Bit 7    | X            | RESERVED | RESERVED         | -    | -           | -      | 1   |
| Bit 6    | X            | RESERVED | RESERVED         | -    | -           | -      | 1   |
| Bit 5    | X            | RESERVED | RESERVED         | -    | -           | -      | 1   |
| Bit 4    | X            | RESERVED | RESERVED         | -    | -           | -      | 1   |
| Bit 3    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 2    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 1    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |
| Bit 0    | X            | RESERVED | RESERVED         | RW   | Disable     | Enable | 1   |



| BYTE     | Affected Pin |                   |                  | TYPE | Bit Control |   |     |
|----------|--------------|-------------------|------------------|------|-------------|---|-----|
|          | Pin #        | Name              | Control Function |      | 0           | 1 | PWD |
| <b>6</b> |              |                   |                  |      |             |   |     |
| Bit 7    | X            | Revision ID Bit 3 | (Reserved)       | R    | -           | - | 1   |
| Bit 6    | X            | Revision ID Bit 2 | (Reserved)       | R    | -           | - | 1   |
| Bit 5    | X            | Revision ID Bit 1 | (Reserved)       | R    | -           | - | 1   |
| Bit 4    | X            | Revision ID Bit 0 | (Reserved)       | R    | -           | - | 1   |
| Bit 3    | X            | Vendor ID Bit 3   | (Reserved)       | R    | -           | - | 1   |
| Bit 2    | X            | Vendor ID Bit 2   | (Reserved)       | R    | -           | - | 1   |
| Bit 1    | X            | Vendor ID Bit 1   | (Reserved)       | R    | -           | - | 1   |
| Bit 0    | X            | Vendor ID Bit 0   | (Reserved)       | R    | -           | - | 1   |

| BYTE     | Affected Pin |            |                  | TYPE | Bit Control |   |     |
|----------|--------------|------------|------------------|------|-------------|---|-----|
|          | Pin #        | Name       | Control Function |      | 0           | 1 | PWD |
| <b>7</b> |              |            |                  |      |             |   |     |
| Bit 7    | X            | DEVICE ID7 | (Reserved)       | R    | -           | - | 0   |
| Bit 6    | X            | DEVICE ID6 | (Reserved)       | R    | -           | - | 0   |
| Bit 5    | X            | DEVICE ID5 | (Reserved)       | R    | -           | - | 0   |
| Bit 4    | X            | DEVICE ID4 | (Reserved)       | R    | -           | - | 0   |
| Bit 3    | X            | DEVICE ID3 | (Reserved)       | R    | -           | - | 0   |
| Bit 2    | X            | DEVICE ID2 | (Reserved)       | R    | -           | - | 0   |
| Bit 1    | X            | DEVICE ID1 | (Reserved)       | R    | -           | - | 0   |
| Bit 0    | X            | DEVICE ID0 | (Reserved)       | R    | -           | - | 1   |

| BYTE     | Affected Pin |             |                  | TYPE | Bit Control |   |     |
|----------|--------------|-------------|------------------|------|-------------|---|-----|
|          | Pin #        | Name        | Control Function |      | 0           | 1 | PWD |
| <b>8</b> |              |             |                  |      |             |   |     |
| Bit 7    | X            | Byte Count7 | (Reserved)       | R    | -           | - | 0   |
| Bit 6    | X            | Byte Count6 | (Reserved)       | R    | -           | - | 0   |
| Bit 5    | X            | Byte Count5 | (Reserved)       | R    | -           | - | 0   |
| Bit 4    | X            | Byte Count4 | (Reserved)       | R    | -           | - | 0   |
| Bit 3    | X            | Byte Count3 | (Reserved)       | R    | -           | - | 0   |
| Bit 2    | X            | Byte Count2 | (Reserved)       | R    | -           | - | 1   |
| Bit 1    | X            | Byte Count1 | (Reserved)       | R    | -           | - | 1   |
| Bit 0    | X            | Byte Count0 | (Reserved)       | R    | -           | - | 1   |



### Absolute Maximum Ratings

Supply Voltage . . . . . 3.7 V  
 Voltage on any pin with respect to GND . . . -0.5 to +3.7 V  
 Storage Temperature . . . . . -55°C to +125°C  
 Operating Temperature . . . . . 0°C to +85°C  
 Power Dissipation . . . . . 0.5 W

Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only and functional operation of the device at these or any other conditions above those listed in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

### Electrical Characteristics - Input/Supply/Common Output Parameters

T<sub>A</sub> = 0 - 85°C; Supply Voltage V<sub>DD</sub> = 3.3 V +/-5%

| PARAMETER                      | SYMBOL                              | CONDITIONS  | MIN                   | TYP | MAX                   | UNITS |
|--------------------------------|-------------------------------------|---|-----------------------|-----|-----------------------|-------|
| Input High Voltage             | V <sub>IH</sub>                     |   | 2                     |     | V <sub>DD</sub> + 0.3 | V     |
| Input Low Voltage              | V <sub>IL</sub>                     |   | V <sub>SS</sub> - 0.3 |     | 0.8                   | V     |
| Input High Current             | I <sub>IH</sub>                     | V <sub>IN</sub> = V <sub>DD</sub>                       | -5                    |     | 5                     | ∠A    |
| Input Low Current              | I <sub>IL1</sub>                    | V <sub>IN</sub> = 0 V; Inputs with no pull-up resistors | -5                    |     |                       | ∠A    |
| Supply Current                 | I <sub>DD</sub>                     | f <sub>IN</sub> = 14.318MHz                             |                       | 27  | 35                    | mA    |
|                                |                                     | f <sub>IN</sub> = 66.66MHz                              |                       | 42  | 50                    | mA    |
| Powerdown Current              | I <sub>DD3.3PD</sub>                |   |                       | 3   | 5                     | mA    |
| Pin Inductance                 | L <sub>pin</sub>                    |   |                       |     | 7                     | nH    |
| Pin Capacitance <sup>1</sup>   | C <sub>IN</sub>                     | Logic Inputs  |                       |     | 5                     | pF    |
|                                | C <sub>OUT</sub>                    | Output pin capacitance                                  |                       |     | 6                     | pF    |
| Transition time <sup>1</sup>   | T <sub>trans</sub>                  | To 1st crossing of target frequency                     |                       |     | 3                     | ms    |
| Settling time <sup>1</sup>     | T <sub>s</sub>                      | From 1st crossing to 1% target frequency                |                       |     | 3                     | ms    |
| Clk Stabilization <sup>1</sup> | T <sub>STAB</sub>                   | From V <sub>DD</sub> = 3.3 V to 1% target frequency     |                       | 1   | 3                     | ms    |
| Delay <sup>1</sup>             | t <sub>PZH</sub> , t <sub>PZL</sub> | Output enable delay (all outputs)                       | 1                     |     | 10                    | ns    |

<sup>1</sup>Guaranteed by design, not 100% tested in production.

### AC Electrical Characteristics

T<sub>A</sub> = 0 - 70°C; Supply Voltage V<sub>DD</sub> = 3.3 V ±0.3V

| PARAMETER         | DESCRIPTION            | TEST CONDITION          | MIN    | TYP | MAX | UNITS |
|-------------------|------------------------|-------------------------|--------|-----|-----|-------|
| F <sub>IN</sub>   | Input Frequency        | Input Clock             | 14.318 |     | 80  | MHz   |
| f <sub>OUT</sub>  | Output Frequency       | Spread Off              | 14.318 |     | 80  | MHz   |
| t <sub>R</sub>    | Output Rise Time       | 15 pF load, 0.8V - 2.4V | 0.5    |     | 1   | ns    |
| t <sub>F</sub>    | Output Fall Time       | 15 pF load, 2.4 - 0.8V  | 0.5    |     | 1   | ns    |
| I <sub>OD</sub>   | Output Duty Cycle      | 15 pf load              | 45     |     | 55  | %     |
| t <sub>ID</sub>   | Input Duty Cycle       |                         | 45     |     | 55  | %     |
| t <sub>JCYC</sub> | Jitter, Cycle-to-Cycle |                         |        |     | 250 | ps    |



**Electrical Characteristics - CLOCK\_OUT**

T<sub>A</sub> = 0 - 85°C; V<sub>DD</sub> = 3.3V +/-5%; C<sub>L</sub> = 10-20 pF (unless otherwise specified)

| PARAMETER                       | SYMBOL                            | CONDITIONS                                       | MIN  | TYP | MAX | UNITS |
|---------------------------------|-----------------------------------|--|------|-----|-----|-------|
| Current Source Output Impedance | Z <sub>O</sub> <sup>1</sup>       | V <sub>O</sub> = V <sub>x</sub>                  | 3000 |     |     | (     |
| Output High Voltage             | V <sub>OH3</sub>                  | I <sub>OH</sub> = -1 mA                          | 2.4  |     |     | V     |
| Output Low Voltage              | V <sub>OL3</sub>                  | I <sub>OL</sub> = 1 mA                           |      |     | 0.4 |       |
| Rise Time                       | t <sub>r3</sub>                   | V <sub>OL</sub> = 0.41V, V <sub>OH</sub> = 0.86V | 0.5  |     | 1   | ns    |
| Fall Time                       | t <sub>f3</sub>                   | V <sub>OH</sub> = 0.86V V <sub>OL</sub> = 0.41V  | 0.5  |     | 1   | ns    |
| Duty Cycle                      | d <sub>t3</sub>                   | V <sub>T</sub> = 50%                             | 45   | 51  | 55  | %     |
| Jitter, Cycle to cycle          | t <sub>jcy-cyc</sub> <sup>1</sup> | V <sub>T</sub> = 50%                             |      |     | 250 | ps    |

<sup>1</sup>Guaranteed by design, not 100% tested in production.


<sup>2</sup> I<sub>OWT</sub> can be varied and is selectable thru the MULTSEL pin.

**Electrical Characteristics - REF**

T<sub>A</sub> = 0 - 85°C; V<sub>DD</sub>=3.3V +/-5%; C<sub>L</sub> = 10-20 pF (unless otherwise specified)

| PARAMETER           | SYMBOL                            | CONDITIONS   | MIN | TYP | MAX | UNITS |
|---------------------|-----------------------------------|--|-----|-----|-----|-------|
| Output Frequency    | F <sub>O1</sub>                   |  |     |     |     | MHz   |
| Output Impedance    | R <sub>DSP1</sub> <sup>1</sup>    | V <sub>O</sub> = V <sub>DD</sub> *(0.5)                    | 20  |     | 60  | ∠     |
| Output High Voltage | V <sub>OH</sub> <sup>1</sup>      | I <sub>OH</sub> = -1 mA                                    | 2.4 |     |     | V     |
| Output Low Voltage  | V <sub>OL</sub> <sup>1</sup>      | I <sub>OL</sub> = 1 mA                                     |     |     | 0.4 | V     |
| Output High Current | I <sub>OH</sub> <sup>1</sup>      | V <sub>OH@MIN</sub> = 1.0 V, V <sub>OH@MAX</sub> = 3.135 V | -29 |     | -23 | mA    |
| Output Low Current  | I <sub>OL</sub> <sup>1</sup>      | V <sub>OL@MIN</sub> = 1.95 V, V <sub>OL@MAX</sub> = 0.4 V  | 29  |     | 27  | mA    |
| Rise Time           | t <sub>r1</sub> <sup>1</sup>      | V <sub>OL</sub> = 0.4 V, V <sub>OH</sub> = 2.4 V           | 0.5 |     | 1   | ns    |
| Fall Time           | t <sub>f1</sub> <sup>1</sup>      | V <sub>OH</sub> = 2.4 V, V <sub>OL</sub> = 0.4 V           | 0.5 |     | 1   | ns    |
| Duty Cycle          | d <sub>t1</sub> <sup>1</sup>      | V <sub>T</sub> = 1.5 V                                     | 45  |     | 55  | %     |
| Accumulated Jitter  | t <sub>jlongterm</sub>            | V <sub>T</sub> = 1.5 V 10us.                               |     |     | 2   | ns    |
| Jitter              | t <sub>jcy-cyc</sub> <sup>1</sup> | V <sub>T</sub> = 1.5 V                                     |     |     | 500 | ps    |

<sup>1</sup>Guaranteed by design, not 100% tested in production.

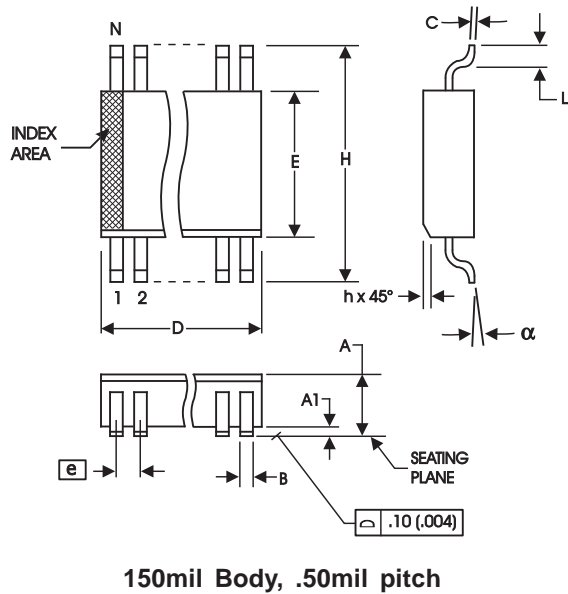

**150 mil (Narrow Body) SOIC**

| SYMBOL | In Millimeters    |      | In Inches         |       |
|--------|-------------------|------|-------------------|-------|
|        | COMMON DIMENSIONS |      | COMMON DIMENSIONS |       |
|        | MIN               | MAX  | MIN               | MAX   |
| A      | 1.35              | 1.75 | .0532             | .0688 |
| A1     | 0.10              | 0.25 | .0040             | .0098 |
| B      | 0.33              | 0.51 | .013              | .020  |
| C      | 0.19              | 0.25 | .0075             | .0098 |
| D      | SEE VARIATIONS    |      | SEE VARIATIONS    |       |
| E      | 3.80              | 4.00 | .1497             | .1574 |
| e      | 1.27 BASIC        |      | 0.050 BASIC       |       |
| H      | 5.80              | 6.20 | .2284             | .2440 |
| h      | 0.25              | 0.50 | .010              | .020  |
| L      | 0.40              | 1.27 | .016              | .050  |
| N      | SEE VARIATIONS    |      | SEE VARIATIONS    |       |
| a      | 0°                | 8°   | 0°                | 8°    |

**VARIATIONS**

| N | D mm. |      | D (inch) |       |
|---|-------|------|----------|-------|
|   | MIN   | MAX  | MIN      | MAX   |
| 8 | 4.80  | 5.00 | .1890    | .1968 |


Reference Doc.: JEDEC Publication 95, MS-012  
10-0030


**Ordering Information**

**ICS91718yMLF-T**

Example:

**ICS XXXX y M LF-T**

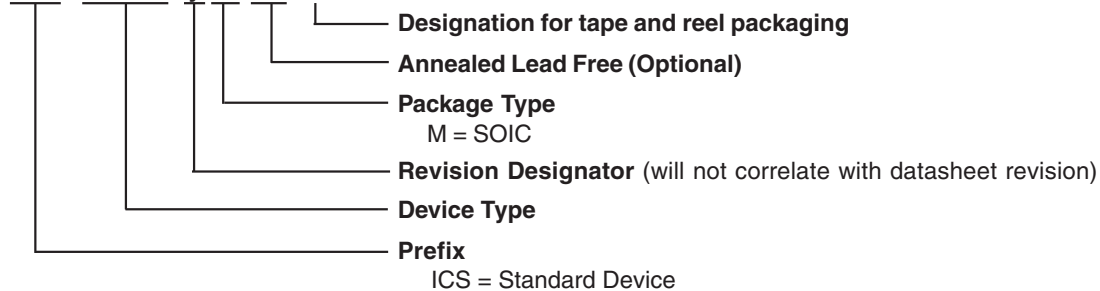

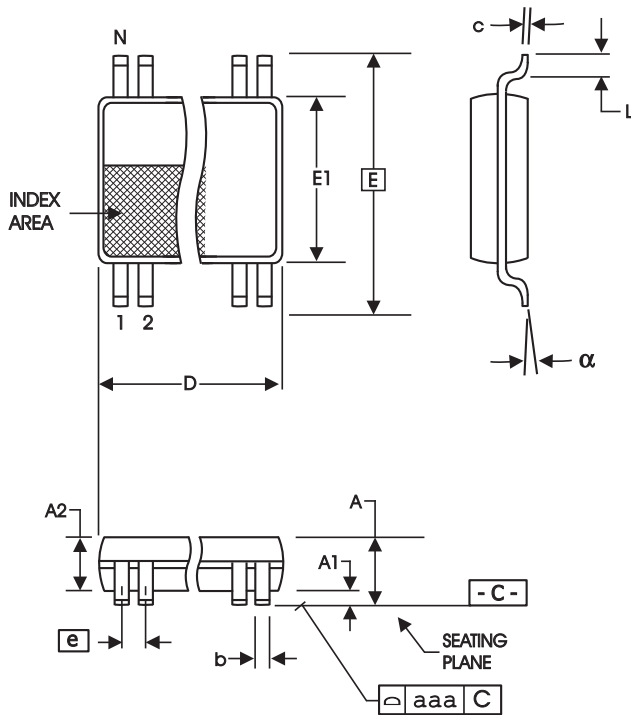

4.40 mm. Body, 0.65 mm. Pitch TSSOP  
(173 mil) (25.6 mil)

| SYMBOL | In Millimeters<br>COMMON DIMENSIONS |      | In Inches<br>COMMON DIMENSIONS |      |
|--------|-------------------------------------|------|--------------------------------|------|
|        | MIN                                 | MAX  | MIN                            | MAX  |
| A      | --                                  | 1.20 | --                             | .047 |
| A1     | 0.05                                | 0.15 | .002                           | .006 |
| A2     | 0.80                                | 1.05 | .032                           | .041 |
| b      | 0.19                                | 0.30 | .007                           | .012 |
| c      | 0.09                                | 0.20 | .0035                          | .008 |
| D      | SEE VARIATIONS                      |      | SEE VARIATIONS                 |      |
| E      | 6.40 BASIC                          |      | 0.252 BASIC                    |      |
| E1     | 4.30                                | 4.50 | .169                           | .177 |
| e      | 0.65 BASIC                          |      | 0.0256 BASIC                   |      |
| L      | 0.45                                | 0.75 | .018                           | .030 |
| N      | SEE VARIATIONS                      |      | SEE VARIATIONS                 |      |
| a      | 0°                                  | 8°   | 0°                             | 8°   |
| aaa    | --                                  | 0.10 | --                             | .004 |

VARIATIONS

| N | D mm. |      | D (inch) |      |
|---|-------|------|----------|------|
|   | MIN   | MAX  | MIN      | MAX  |
| 8 | 2.90  | 3.10 | .114     | .122 |

Reference Doc.: JEDEC Publication 95, MO-153


10-0035

### Ordering Information

ICS91718yGLF-T

Example:

ICS XXXX y G LF-T

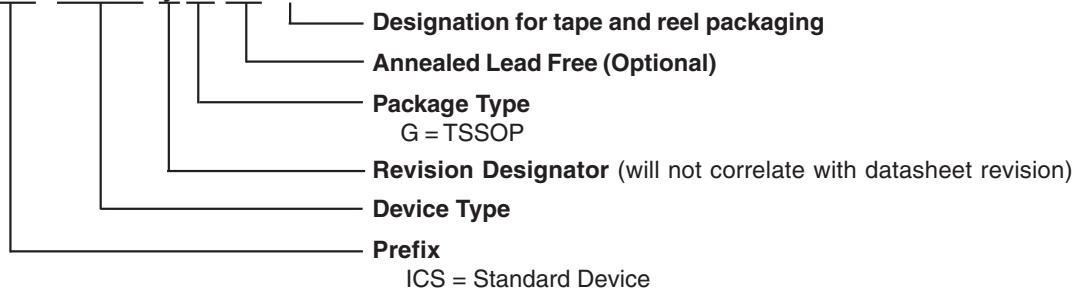

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ICS91718CMLFT on WIN SOURCE](#)
-  [IDT, Integrated Device Technology Inc Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management