


HXC Series Upgrade!

- High reliability and high voltage are realized by hybrid electrolyte
- Endurance with ripple current : 4,000 hours at 125°C
- Rated voltage range : 16 to 63V_{dc}, Capacitance range : 6.8 to 560μF
- For high temperature and high reliability applications.
(Automotive equipment, Base station equipment, etc.)
- RoHS2 Compliant
- Halogen Free
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.




◆ SPECIFICATIONS


| Items | Characteristics |
|--|---|
| Category | -55 to +125°C |
| Temperature Range | |
| Rated Voltage Range | 16 to 63V _{dc} |
| Capacitance Tolerance | ±20% (M) (at 20°C, 120Hz) |
| Leakage Current | I=0.01CV or 3 μA, whichever is greater Where, I : Max. leakage current (μA), C: Nominal capacitance(μF), V : Rated voltage(V) (at 20°C after 2 minutes) |
| Dissipation Factor (tan δ) | Rated voltage(V _{dc}) tan δ (Max.) |
| Low Temperature Characteristics (Max. Impedance Ratio) | Z(-25°C)/Z(+20°C) ≤ 1.5 Z(-55°C)/Z(+20°C) ≤ 2.0 (at 100kHz) |
| Endurance | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 4,000 hours at 125°C. |
| Shelf Life | The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. |
| Bias Humidity Test | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 85°C, 85% RH for 2,000 hours. |

◆ DIMENSIONS [mm]

- Terminal Code : A
- Size code : E61 to JC5
- Terminal Code : G(Vibration resistant structure)
- Size code : F61 to JC5

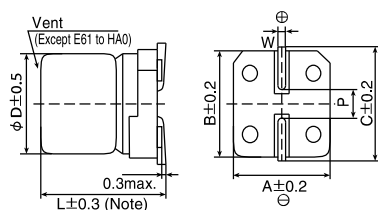


Note : L±0.5 for HA0 to JC5

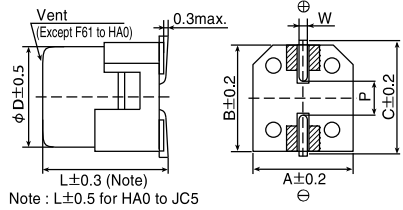

▨ : Dummy terminals

| Size Code | φD | L | A | B | C | W | P |
|-----------|-----|------|------|------|------|------------|-----|
| E61 | 5 | 5.8 | 5.3 | 5.3 | 5.9 | 0.5 to 0.8 | 1.4 |
| F61 | 6.3 | 5.8 | 6.6 | 6.6 | 7.2 | 0.5 to 0.8 | 1.9 |
| F80 | 6.3 | 7.7 | 6.6 | 6.6 | 7.2 | 0.5 to 0.8 | 1.9 |
| HA0 | 8 | 10.0 | 8.3 | 8.3 | 9.0 | 0.7 to 1.1 | 3.1 |
| JA0 | 10 | 10.0 | 10.3 | 10.3 | 11.0 | 0.7 to 1.1 | 4.5 |
| JC5 | 10 | 12.5 | 10.3 | 10.3 | 11.0 | 0.7 to 1.1 | 4.5 |

◆ PART NUMBERING SYSTEM

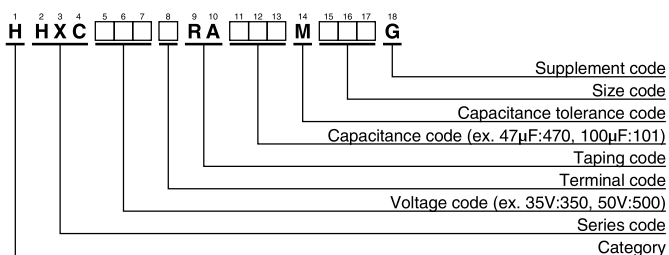

◆ MARKING

EX) 35V270μF



● Rated voltage symbol

| Rated voltage (V _{dc}) | Symbol |
|----------------------------------|--------|
| 16 | C |
| 25 | E |
| 35 | V |
| 50 | H |
| 63 | J |

Please refer to "Product code guide (conductive polymer hybrid type)"

◆STANDARD RATINGS

| WV (V _{dc}) | Cap (μF) | Size code | ESR (mΩ max./20°C, 100kHz) | Rated ripple current (mA rms/125°C, 100kHz) | Part No. |
|--------------------------|-------------|-----------|-------------------------------|--|--------------------|
| 16 | 47 | E61 | 80 | 550 | HHXC160ARA470ME61G |
| | 82 | F61 | 45 | 950 | HHXC160□RA820MF61G |
| | 150 | F80 | 27 | 1,450 | HHXC160□RA151MF80G |
| | 270 | HA0 | 22 | 1,700 | HHXC160□RA271MHA0G |
| | 470 | JA0 | 18 | 2,100 | HHXC160□RA471MJA0G |
| | 560 | JC5 | 15 | 2,320 | HHXC160□RA561MJC5G |
| 25 | 33 | E61 | 80 | 550 | HHXC250ARA330ME61G |
| | 47 | F61 | 50 | 900 | HHXC250□RA470MF61G |
| | 56 | F61 | 50 | 900 | HHXC250□RA560MF61G |
| | 68 | F80 | 30 | 1,400 | HHXC250□RA680MF80G |
| | 100 | F80 | 30 | 1,400 | HHXC250□RA101MF80G |
| | 150 | HA0 | 27 | 1,600 | HHXC250□RA151MHA0G |
| | 220 | HA0 | 27 | 1,600 | HHXC250□RA221MHA0G |
| | 270 | JA0 | 20 | 2,000 | HHXC250□RA271MJA0G |
| | 330 | JA0 | 20 | 2,000 | HHXC250□RA331MJA0G |
| 470 | JC5 | 16 | 2,300 | HHXC250□RA471MJC5G | |
| 35 | 22 | E61 | 100 | 550 | HHXC350ARA220ME61G |
| | 27 | F61 | 60 | 900 | HHXC350□RA270MF61G |
| | 47 | F61 | 60 | 900 | HHXC350□RA470MF61G |
| | 47 | F80 | 35 | 1,400 | HHXC350□RA470MF80G |
| | 68 | F80 | 35 | 1,400 | HHXC350□RA680MF80G |
| | 100 | HA0 | 27 | 1,600 | HHXC350□RA101MHA0G |
| | 150 | HA0 | 27 | 1,600 | HHXC350□RA151MHA0G |
| | 150 | JA0 | 20 | 2,000 | HHXC350□RA151MJA0G |
| | 270 | JA0 | 20 | 2,000 | HHXC350□RA271MJA0G |
| 330 | JC5 | 17 | 2,200 | HHXC350□RA331MJC5G | |
| 50 | 10 | F61 | 80 | 750 | HHXC500□RA100MF61G |
| | 15 | F80 | 40 | 1,100 | HHXC500□RA150MF80G |
| | 22 | F61 | 80 | 750 | HHXC500□RA220MF61G |
| | 33 | F80 | 40 | 1,100 | HHXC500□RA330MF80G |
| | 33 | HA0 | 30 | 1,250 | HHXC500□RA330MHA0G |
| | 47 | HA0 | 30 | 1,250 | HHXC500□RA470MHA0G |
| | 56 | JA0 | 25 | 1,600 | HHXC500□RA560MJA0G |
| | 68 | HA0 | 30 | 1,250 | HHXC500□RA680MHA0G |
| | 100 | JA0 | 25 | 1,600 | HHXC500□RA101MJA0G |
| | 120 | JA0 | 25 | 1,600 | HHXC500□RA121MJA0G |
| 150 | JC5 | 19 | 2,000 | HHXC500□RA151MJC5G | |
| 63 | 6.8 | F61 | 120 | 700 | HHXC630□RA6R8MF61G |
| | 10 | F61 | 120 | 700 | HHXC630□RA100MF61G |
| | 10 | F80 | 80 | 900 | HHXC630□RA100MF80G |
| | 22 | F80 | 80 | 900 | HHXC630□RA220MF80G |
| | 22 | HA0 | 40 | 1,100 | HHXC630□RA220MHA0G |
| | 33 | HA0 | 40 | 1,100 | HHXC630□RA330MHA0G |
| | 33 | JA0 | 30 | 1,400 | HHXC630□RA330MJA0G |
| | 47 | HA0 | 40 | 1,100 | HHXC630□RA470MHA0G |
| | 56 | JA0 | 30 | 1,400 | HHXC630□RA560MJA0G |
| | 82 | JA0 | 30 | 1,400 | HHXC630□RA820MJA0G |
| | 100 | JC5 | 22 | 1,900 | HHXC630□RA101MJC5G |

□ : Enter the appropriate terminal code.

◆RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

| Capacitance(μF) | Frequency(Hz) | | | | | | |
|-----------------|---------------|------|------|------|------|------|--------------|
| | 120 | 1k | 5k | 10k | 20k | 30k | 100k to 500k |
| to 10 | 0.03 | 0.30 | 0.50 | 0.60 | 0.70 | 0.75 | 1.00 |
| 15 to 33 | 0.07 | 0.30 | 0.50 | 0.60 | 0.70 | 0.75 | 1.00 |
| 47 to 150 | 0.10 | 0.40 | 0.60 | 0.70 | 0.80 | 0.80 | 1.00 |
| 220 to 560 | 0.13 | 0.45 | 0.65 | 0.75 | 0.85 | 0.85 | 1.00 |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View HHXC500ARA680MHA0G on WIN SOURCE](#)

 [United Chemi-Con Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management