



**Part Number :** [877159106](#)


**Product Description :** 1.00mm Pitch, PCI Express Connector, 64 Circuits, Nylon 4/6 Glass-filled, Black Housing, Phosphor Bronze, 0.76µm Gold Solder-tail, Lead-Free

**Series Number :** 87715

**Status :** Active

**Product Category :** Card Edge Connectors

---

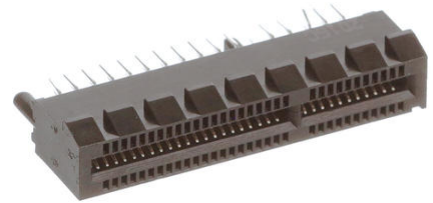

## Documents and Resources

### Drawings

[877159106 sd.pdf](#)

[PK-87715-207-001.pdf](#)

### 3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)

[Symbol and Footprint \(Multi-Format\)](#)

[EE-87715-002-001.pdf](#)

[EE-87715-011-001.pdf](#)

[EE-87715-012-001.pdf](#)

[EE-87715-013-001.pdf](#)

[EE-87715-014-001.pdf](#)

[SI-87715-002-001.pdf](#)

[SP-87715-002-001.zip](#)

[SP-87715-011-001.zip](#)

[SP-87715-012-001.zip](#)

[SP-87715-013-001.zip](#)

[SP-87715-014-001.zip](#)

### Specifications


[PS-87715-200-001.pdf](#)

[TS-87715-207-001.pdf](#)

---

# Product Environment Compliance

## Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)4165-DC (25 June 2025)
EU RoHS	Compliant per EU 2015/863

### Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

### Substances of Interest

- PFAS

### EU RoHS Certificate of Compliance

### Additional Product Compliance Information

---

## Part Details

### General

Status	Active
Category	Card Edge Connectors
Series	87715
Description	1.00mm Pitch, PCI Express Connector, 64 Circuits, Nylon 4/6 Glass-filled, Black Housing, Phosphor Bronze, 0.76µm Gold Solder-tail, Lead-Free
Comments	PCI 4 lanes

Component Type	Edgecard to PCB
Product Name	PCI Express
UPC	822348685486

### Agency

CSA	LR19980
UL	E29179

### Electrical

Current - Maximum per Contact	1.1A
Data Rate	8.0 Gbps
High Power Bay (30.0A or more)	No
Voltage - Maximum	50V AC (RMS)/DC

### Physical

Circuits (Loaded)	64
Circuits (maximum)	64
Durability (mating cycles max)	50
Edge Card Thickness	1.57mm
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Keying to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	3.864/g
Orientation	Vertical
Packaging Type	Tray
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
PC Tail Length	2.54mm
Pitch - Mating Interface	1.00mm
Pitch - Termination Interface	1.00mm
Plating min - Mating	0.762µm
Polarized to Mating Part	Yes

(p)ower-(s)ignal Configuration	64s - 0p
Temperature Range - Operating	-55° to +85°C
Termination Interface Style	Through Hole

### Solder Process Data

Max-Duration	10
Lead-Free Process Capability	REFLOW
Max-Cycle	1
Max-Temp	260

---

### Mates With / Use With

#### Mates with Part(s)

Description	Part Number
Mates With	PCI Express Card

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View 87715-9106 on WIN SOURCE](#)
- ⊖ [Molex, LLC Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management