



COAXIAL WIDEBAND


Medium Power Amplifier

ZVA-0.5W303G+ ZVA-0.5W303GX+

50Ω 0.5W 10 MHz to 30 GHz

THE BIG DEAL

- Wideband 10 MHz to 30 GHz
- Output Power 0.5 watt, at Saturation
- Excellent Gain Flatness, ± 1.5 dB typ. from 100 MHz to 26.5 GHz
- Low Noise Figure, 4.2 dB typ. from 1 to 26.5 GHz
- Over-Voltage & Reverse Voltage Protection
- Single Bias Voltage of 12V

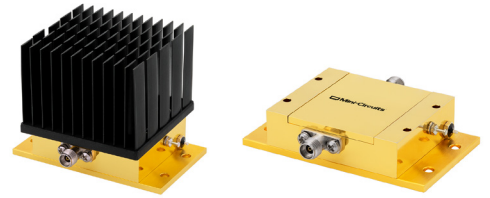

Generic photo used for illustration purposes only

| | | |
|-------------------|---------------|-----------------|
| Model No. | ZVA-0.5W303G+ | ZVA-0.5W303GX+▲ |
| Case Style | AV2554-3 | |
| Connectors | 2.92mm female | |

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Test and Measurements
- 5G Sub-6 GHz and Millimeter Wave
- Aerospace and Defense
- Radio, Radars and Satellite Systems
- Industrial, Scientific and Medical

PRODUCT OVERVIEW

Mini-Circuits' ZVA-0.5W303G+ is an ideal choice for applications requiring a wideband driver amplifier. This coaxial, wideband RF amplifier operates over 10 MHz to 30 GHz, delivering a saturated output power of +27 dBm at a typical 1dB compression point of +25 dBm. Ideal for many applications that require higher dynamic range, with a low noise figure of 4.2 dB typ. across majority of the band. A combination of this amplifier with the lab test setups, makes it a versatile choice for high power test applications. Complementary safety features such as protection against DC transients, over-voltage and reverse voltage conditions ensure that the amplifier stays protected against mishandling.

KEY FEATURES

| Feature | Advantages |
|--|---|
| Ultra-wideband, 0.01 to 30 GHz | Enables a single amplifier to be used in a wide range of applications. |
| Excellent gain flatness, ± 1.5 dB across full frequency range | Provides consistent performance across its operating frequency, minimizing the need for external equalizing networks in wideband applications. |
| Low noise and high IP3: <ul style="list-style-type: none"> • NF, 4.2 dB typ. • IP3, +34 dBm typ. | The combination of low noise and high IP3 makes the ZVA-0.5W303G+ ideal for use in receiver front end (RFE) as it gives the user the advantages of sensitivity and two-tone IM performance at both ends of the dynamic range. |
| Rugged design | Built-in protection against DC transients, reverse voltage and over-voltage provides added reliability for demanding operating conditions. |



ELECTRICAL SPECIFICATION AT +25 °C (AMBIENT), $V_{DD} = +12$ V TYP.

| Parameter | Condition (GHz) | ZVA-0.5W303G+ ZVA-0.5W303GX+▲ | | | Units |
|---|-----------------|----------------------------------|-------|------|-------|
| | | Min. | Typ. | Max. | |
| Frequency Range | | .01 | | 30 | GHz |
| Gain | .01 - 10 | 21 | 24.5 | | dB |
| | 10 - 26.5 | 20.5 | 24.5 | | |
| | 26.5 - 30 | 20 | 23 | | |
| Gain Flatness | 0.10 - 26.5 | | ± 1.5 | | dB |
| Output Power at 1dB compression | .01 - .05 | 23 | 25 | | dBm |
| | .05 - 10 | 24 | 27 | | |
| | 10 - 26.5 | 22.5 | 25 | | |
| | 26.5 - 30 | 20.5 | 23 | | |
| Saturated Output Power ¹ | .01 - .05 | 27 | 29 | | dBm |
| | .05 - 10 | 26 | 29 | | |
| | 10 - 26.5 | 24 | 27 | | |
| | 26.5 - 30 | 22.5 | 26 | | |
| Noise Figure | 1 - 26.5 | | 4.2 | 7 | dB |
| | 26.5 - 30 | | 6.5 | 7.5 | |
| Output IP3 (output power = 10 dBm/tone) | .01 - 10 | | 37 | | dBm |
| | 10 - 26.5 | | 32 | | |
| | 26.5 - 30 | | 30 | | |
| Input VSWR | .05 - 10 | | 1.4 | | :1 |
| | 10 - 26.5 | | 1.6 | | |
| | 26.5 - 30 | | 2 | | |
| Output VSWR | .05 - 10 | | 1.2 | | :1 |
| | 10 - 26.5 | | 1.8 | | |
| | 26.5 - 30 | | 2 | | |
| DC Supply Voltage (V_{DD}) | | 11 | 12 | 13 | V |
| Supply Current ² | | | 460 | 600 | mA |

1. With Input Power up to +15 dBm.

2. Maximum Supply Current is specified at Saturated Output Power.

▲ For unit without heatsink, the baseplate temperature must be limited to 75°C. at max. ambient temperature. Suitable heat-sinking mechanism must be provided to ensure the baseplate does not exceed this temperature.

ABSOLUTE MAXIMUM RATINGS⁴


| Parameter | Ratings |
|---|----------------|
| Operating Temperature (Ambient) | 0° to +50 °C |
| Storage Temperature | -20° to +70 °C |
| Total Power Dissipation | 7.5 watts |
| RF Input Power ³ (CW), $V_{DD}=12$ V | +16 dBm |
| DC Voltage | +14V |

3. Specified under matched load to 50 ohms.


4. Continuous operation is not recommended at these extremes. Permanent damage may occur if any of these limits are exceeded.



CASE STYLE DRAWING FOR MODELS WITH HEATSINK ZVA-0.5W303G+

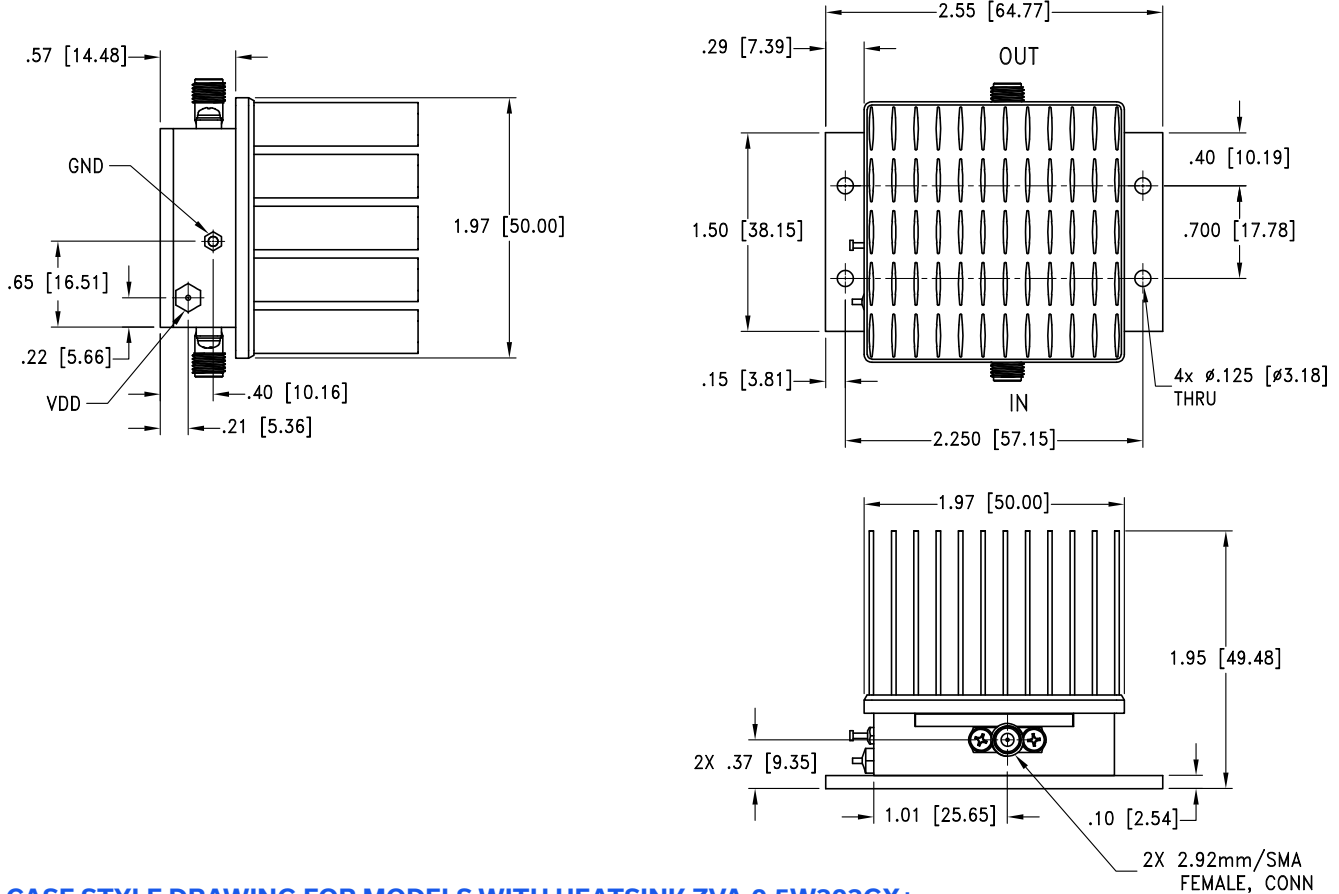

CASE STYLE DRAWING FOR MODELS WITH HEATSINK ZVA-0.5W303GX+






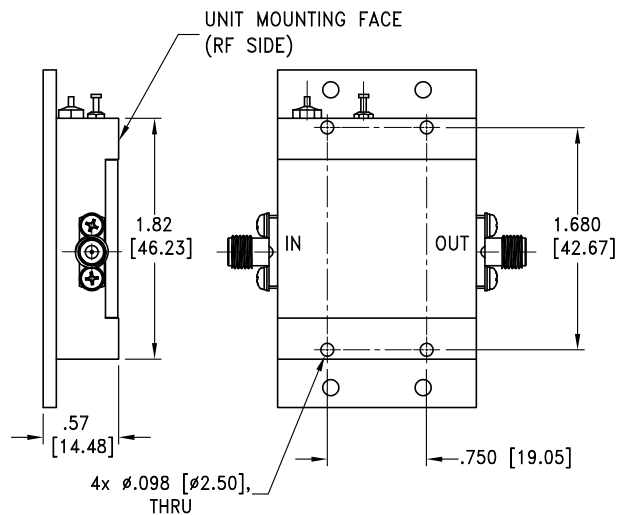


Weight: 455 grams;
 Weight without heatsink: 345 grams;
 Dimensions are in inches [mm]. Tolerances: 2 PL \pm .03; 3 PL \pm .015



TYPICAL PERFORMANCE DATA/CURVES

| Frequency (MHz) | Gain (dB) | Directivity (dB) | VSWR (:1) | | Noise Figure (dB) | Pout at 1 dB Compr. (dBm) | Pout at Saturation (dBm) | OIP3 (dBm) |
|-----------------|-----------|------------------|-----------|------|-------------------|---------------------------|--------------------------|------------|
| | 12V | 12V | IN | OUT | 12V | 12V | 12V | 12V |
| 10 | 24.50 | 54.92 | 2.22 | 1.74 | - | 23.91 | 29.88 | 35.16 |
| 3000 | 25.50 | 68.44 | 1.06 | 1.10 | 4.78 | 28.21 | 30.04 | 39.26 |
| 5000 | 24.63 | 64.00 | 1.09 | 1.05 | 3.67 | 28.32 | 30.02 | 40.98 |
| 9000 | 23.57 | 57.06 | 1.64 | 1.24 | 2.92 | 26.98 | 28.16 | 37.67 |
| 10000 | 23.82 | 59.26 | 1.54 | 1.32 | 3.11 | 26.65 | 27.99 | 37.11 |
| 13000 | 24.40 | 48.16 | 1.25 | 1.36 | 3.37 | 25.97 | 27.95 | 35.63 |
| 15000 | 25.12 | 39.58 | 1.09 | 1.39 | 3.75 | 25.76 | 28.59 | 35.14 |
| 18000 | 24.94 | 37.76 | 1.39 | 1.22 | 4.30 | 26.17 | 28.56 | 33.97 |
| 20000 | 24.38 | 38.45 | 1.11 | 1.77 | 4.79 | 25.22 | 28.51 | 33.35 |
| 23000 | 25.02 | 32.64 | 1.44 | 2.11 | 5.70 | 25.40 | 27.49 | 32.68 |
| 27000 | 23.06 | 24.31 | 1.08 | 2.21 | 6.25 | 25.11 | 26.49 | 31.93 |
| 30000 | 24.69 | 23.20 | 1.75 | 1.81 | 6.98 | 23.02 | 25.71 | 30.38 |

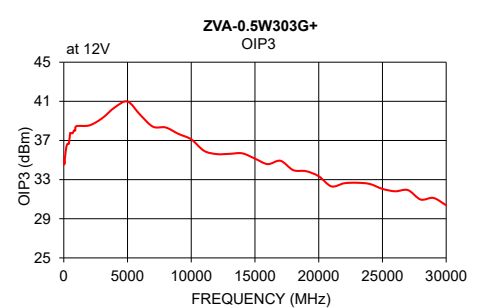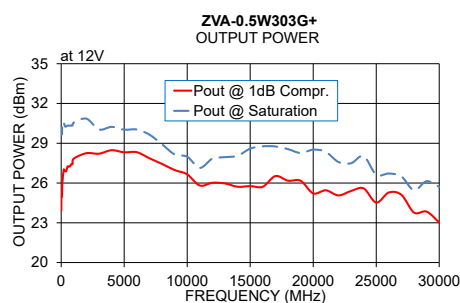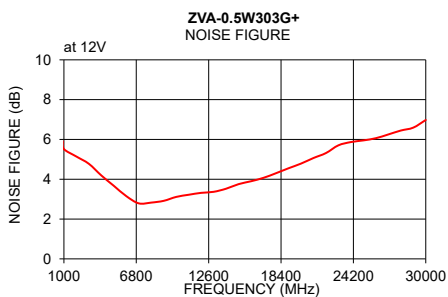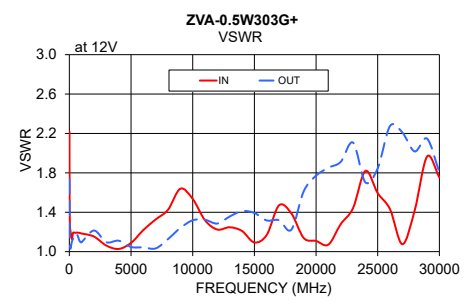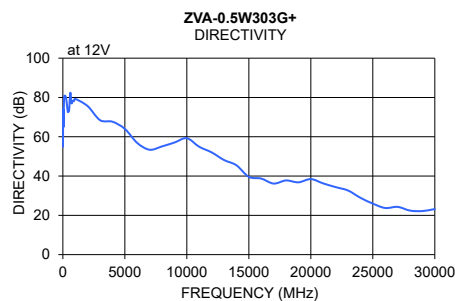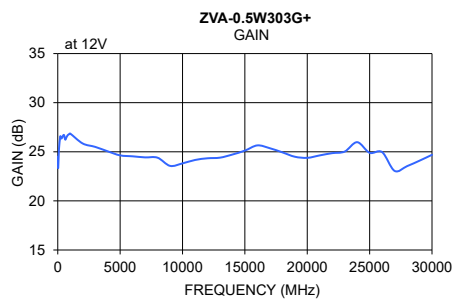



NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ZVA-0.5W303G+ on WIN SOURCE](#)
-  [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management