



COAXIAL

High Power Amplifier

ZHL-100W-13+

50Ω 100W 800 to 1000 MHz

FEATURES

- Saturated Power 100W typ.
- Wide bandwidth, usable 750 to 1050 MHz
- High Gain, 50 dB typ.
- Good Gain Flatness, ±1dB typ.
- Unconditionally stable
- Self protected against excessive drive, high case temp., reverse polarity and shorting/unshorting
- Can withstand short and open circuit at output while delivering 100 watts

APPLICATIONS

- AM/FM
- Multi-carrier amplification
- Broadband swept signal
- Linear pulse
- Feed-forward



Generic photo used for illustration purposes only

Model No.	ZHL-100W-13+
Case Style	BT1689
Connectors	IN-SMA, OUT-N Type

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		800		1000	MHz
Gain ¹	800 - 1000	45	50	57	dB
Gain Flatness ¹	800 - 1000	-	±1.0	±1.5	dB
Output Power at 1dB compression	800 - 1000	+47.5	+49	-	dBm
Output Power at 3dB compression	800 - 1000	+48.5	+50	-	dBm
Noise Figure	800 - 1000	-	7	10	dB
Output third order intercept point ²	800 - 1000	+52	+60	-	dBm
Input VSWR ¹	800 - 1000	-	1.3	1.6	:1
Output VSWR ¹	800 - 1000	-	1.4	1.6	:1
DC Supply Voltage		-	+28 ⁴	+30	V
Supply Current ³		-	10	14.5	A

1. Small signal input power -15 dBm typ.

2. Two tones, 40 dBm/tone, 1 MHz spacing.

3. Power supply should be capable of delivering 17A at start up.

4. Recommended Operating Voltage.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-20 °C to +45 °C
Storage Temperature	-55 °C to +100 °C
DC Voltage	+30 V
Input RF Power (no damage)	+7 dBm

Permanent damage may occur if any of these limits are exceeded.





COAXIAL


High Power Amplifier

ZHL-100W-13+

Mini-Circuits

50Ω 100W 800 to 1000 MHz

OUTLINE DRAWING

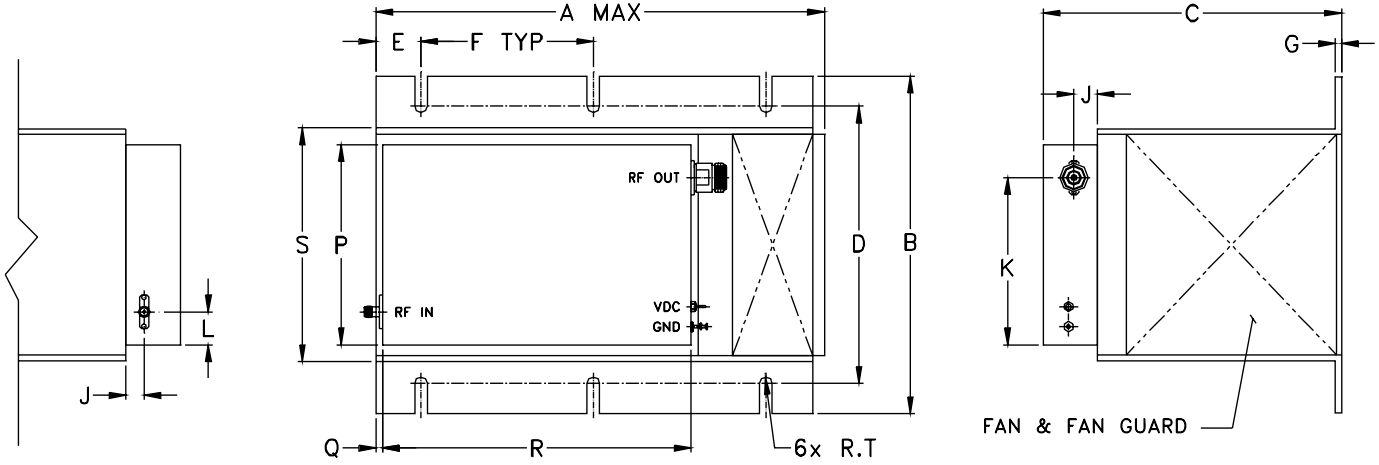

OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F	G	J	K	L	P	Q	R	S	T	wt
9.85	7.3	6.5	6.00	.98	3.75	.13	.51	3.62	.72	4.33	.2	6.69	5.1	.136	grams
250.19	185.42	165.10	152.40	24.89	95.25	3.30	12.95	91.95	18.29	109.98	5.08	169.93	129.54	3.45	4565



COAXIAL







High Power Amplifier

ZHL-100W-13+

50Ω 100W 800 to 1000 MHz

TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Gain (dB)	Directivity (dB)	VSWR (:1)		P _{OUT} at 1 dB Compr. (dBm)	Noise Figure (dB)	OIP3 (dBm)
	30V	30V	IN	OUT	30V	30V	30V
750.00	46.41	85.10	1.12	1.48	48.54	6.71	62.89
840.00	51.94	57.24	1.24	1.15	49.64	6.60	62.97
860.00	50.92	59.22	1.26	1.18	50.37	6.72	62.58
880.00	50.23	63.96	1.27	1.18	50.87	6.60	62.57
900.00	49.99	61.48	1.27	1.17	50.97	6.69	62.63
920.00	50.36	61.95	1.26	1.15	51.20	6.72	63.20
940.00	50.93	69.45	1.25	1.13	51.08	6.69	63.95
950.00	51.19	69.08	1.25	1.11	51.05	6.59	64.32
960.00	51.42	63.07	1.24	1.09	50.84	6.63	64.76
970.00	51.41	65.92	1.23	1.09	50.36	6.80	65.13
980.00	51.23	70.67	1.23	1.14	50.15	6.72	65.25
1000.00	51.17	58.60	1.22	1.34	49.02	6.69	64.51
1040.00	49.05	66.54	1.17	1.69	46.57	6.67	63.12
1060.00	46.70	59.66	1.16	2.18	44.83	6.69	63.38

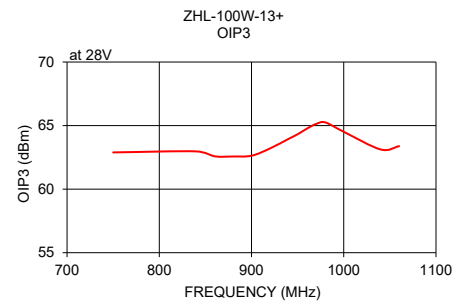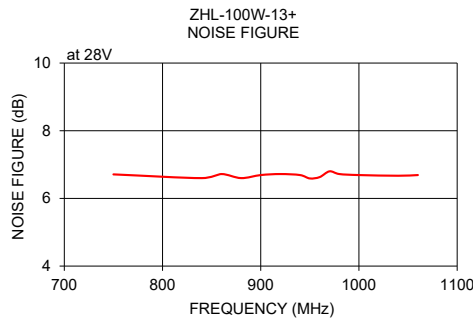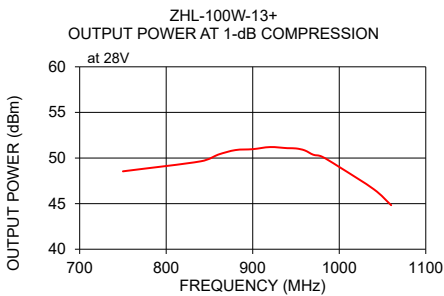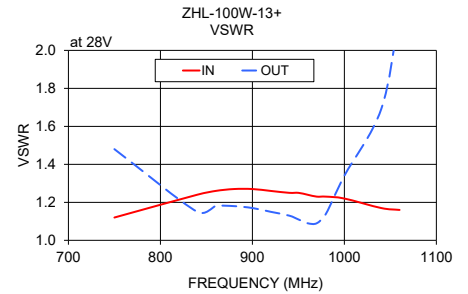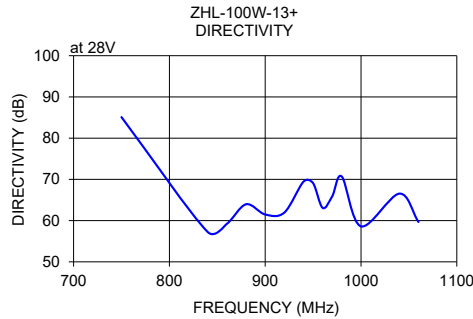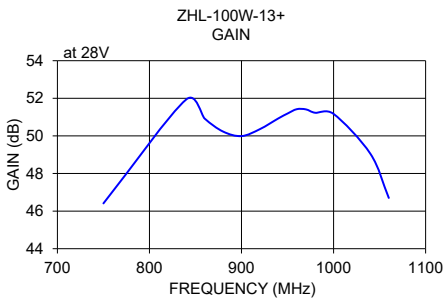

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ZHL-100W-13+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management