



**THE DATASHEET OF
5020021-XX**



battery type: Lithium primary battery
battery size: CR-2 (CR15H270)
chemical system: Manganese Dioxide Lithium Battery

nominal voltage: 3.0 V
open circuit voltage: 3.0...3.5 V
closed circuit voltage: 2.9...3.4 V

conditions, remarks
 new battery
 measured after 1s under load of 50Ω

capacity measurements at 23°C ambient; new battery

rated: 850 mAh discharge at 1mA constant current; 24hours/day
 End Voltage (EV): 2.0V




minimum: 750 mAh discharge at 10mA constant current; continuous
 End Voltage (EV): 2.0V

550 mAh discharge at 500mA constant current; continuous
 End Voltage (EV): 2.0V

duration new battery

pulse load: load: 900mA for 3s, rest time 27s
 >900 cycles at 23°C; End Voltage (EV): 1.55V

discharge diagrams

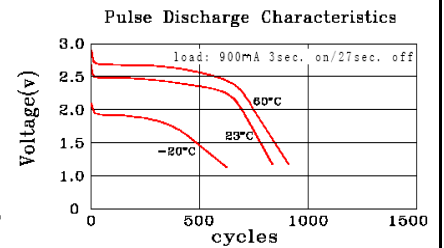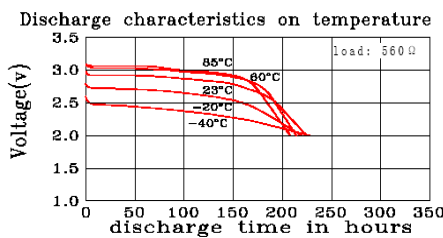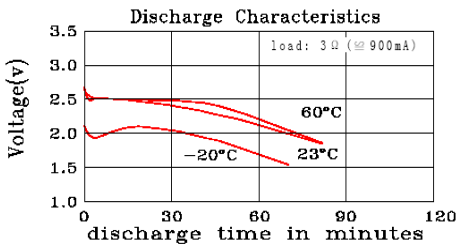

max. discharge current

continuous: 800 mA
 pulse: 1600 mA

internal resistance: ≤ 0.7 Ω sine wave AC method (1kHz; 0.1mA)
 according to IEC 896-2

shelf life: 10 years under proper storage conditions

ambient temperature range:


- 40...60 °C operating temperature
 - 20...45 °C storage temperature
 5...20 °C recommended storage temperature

relative humidity: ≤ 75% during storage

mechanical specifications

cell dimensions

diameter Ø1: 15.6 - 0.7 mm
 diameter Ø2: 6.5 - 1.0 mm
 height H1: 27.0 - 1.0 mm
 height H2: 1.5 - 0.9 mm
 weight: 11 ± 2 g



	ANSMANN Specifications for model:	CR-2 Lithium Photo Battery
	data sheet no. / part no.	
	supplier no.	701801
	author / date	TG / 15.01.2019

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 5020021-XX on WIN SOURCE](#)
- [ANSMANN \(Huizhou\) Trading CO., LTD Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management