



**THE DATASHEET OF
1510-0005-XX**



battery type: Alkaline Manganese Dioxide
battery size: AAAA (LR8D425)
chemical system: Zn / KOH-H₂O / MnO₂

Conditions

nominal voltage: 1.5 V
open circuit voltage: 1.57...1.63 V new battery
 1.55...1.63 V after 1 year storage at 20°C

all measurements at 22 ± 2°C ambient

capacity rated: 500 mAh discharge at 35mA; 24hours/day
 End Voltage (EV): 0.8V

minimum: 470 mAh discharge at 35mA; 24hours/day
 End Voltage (EV): 0.8V

Standard discharge time

nominal: 12 h at 30Ω load new battery
 EV: 0.9V

for QC measurement (at 35mA load; 24h/d; E.V.0.8V)

minimum: 13.5 h tested within 30 days after delivery



11 h after 12 months storage at room temperature

Service Output

Load		35mA	5.1 Ω	75 Ω
Test mode		24h/d	5min/d	1h/d
End voltage		0.9V	0.9V	0.9V
Unit		h	m	h
Initial	MAD	13.5	95	31.5
	Normal	15.0	110	33.0
Stored 1 year	MAD	11.0	80	30.0
	Normal	13.0	100	32.0

m: minute h: hour d: day

Discharge diagrams:

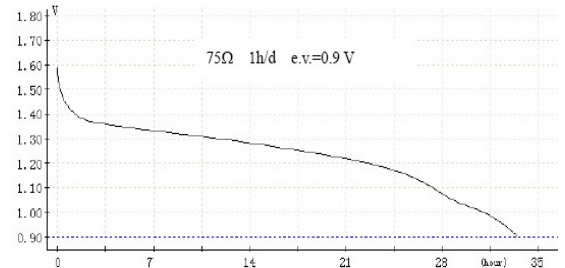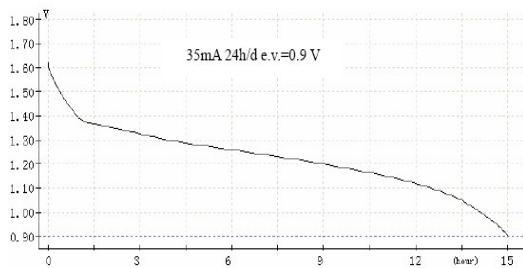


shelf life: 7 years under proper storage conditions (ta: ≤ 22°C; RH: 60 ± 15%)
 ≥95 % of the capacity will remain after 12 months storage

operating temperature range: - 20...60 °C

mechanical specifications:

/	min	max
φ	7.8	8.3
A	41.5	42.5
C	3.7	4.3
F	2.8	3.4
G	0.8	-



unit: mm

nominal weight: 6.8 g



ANSMANN Specifications for model:

**ANSMANN Alkaline Battery
 AAAA - size**

data sheet no. / part no.

s.n.

701381

author / date

TG / 26.05.2025

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 1510-0005-XX on WIN SOURCE](#)
- [ANSMANN \(Huizhou\) Trading CO., LTD Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management