

- **Highly cost efficient design**
- **Pin compatible with LMxx linear regulators**
- **Operation temperature. range -40°C to +85°C**
- **Efficiency up to 92%**
- **Wide input operating range 6-36 VDC**
- **Short circuit protection**
- **Excellent line / load regulation**
- **3-year product warranty**



The TSR 1E is a 1 Ampere step-down switching regulator series and a drop-in replacement for inefficient 78xx linear regulators. This series comes in a standard plastic SIP-3 case and complements our existing POL portfolio with a series focusing strongly on a cost efficient design while maintaining our quality standards. The effective design allows full load operation up to +60°C ambient temperature without the need of any heat sink or forced cooling. The TSR 1E switching regulators provide other significant features over linear regulators, i.e. better output accuracy, lower standby current and no requirement of external capacitors. The TSR 1E series offers a broad application range in many environments and is especially suited for high volume projects where the series will help to reduce production cost by delivering not only a highly cost efficient but also reliable solution.

Models				
Order Code	Output Current max.	Input Voltage Range	Output Voltage nom.	Efficiency typ.
TSR 1-2433E	1'000 mA	6 - 36 VDC (24 VDC nom.)	3.3 VDC	88 %
TSR 1-2450E		7 - 36 VDC (24 VDC nom.)	5 VDC	92 %

Input Specifications

Recommended Input Fuse	(The need of an external fuse has to be assessed in the final application.)
Input Filter	Internal Capacitor

Output Specifications

Voltage Set Accuracy	±4% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (10 - 100%)
Ripple and Noise	- 20 MHz Bandwidth
Capacitive Load	1'000 µF max.
Minimum Load	Not required
Temperature Coefficient	±0.03 %/K max.
Short Circuit Protection	Continuous, Automatic recovery
Output Current Limitation	350% max. of Iout max.
Transient Response	- Peak Variation - Response Time

EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 55032 class A (internal filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55032 class A (internal filter) EN 55032 class B (with external filter)

External filter proposal: www.tracopower.com/tsr1e-emc-filter

General Specifications

Relative Humidity	95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature
Power Derating	- High Temperature
Over Temperature Protection Switch Off	- Protection Mode
Cooling System	Natural convection (20 LFM)
Switching Frequency	520 kHz typ. (PWM)
Insulation System	Non-isolated
Reliability	- Calculated MTBF
Washing Process	Not allowed
Housing Material	Plastic (UL 94 V-0 rated)
Potting Material	Epoxy (UL 94 V-0 rated)
Pin Material	Phosphor Bronze (C5191)
Pin Foundation Plating	Nickel (1 µm min.)
Pin Surface Plating	Tin (3 µm min.), bright
Housing Type	Plastic Case
Mounting Type	PCB Mount
Connection Type	THD (Through-Hole Device)
Footprint Type	SIP3
Soldering Profile	Lead-Free Wave Soldering 265 °C / 5 s max.
Weight	1.6 g

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

www.tracopower.com/info/reach-declaration.pdf

REACH SVHC list compliant

REACH Annex XVII compliant

- RoHS Declaration

www.tracopower.com/info/rohs-declaration.pdf

Exemptions: 7(a), 7(c)-I

(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)

- SCIP Reference Number

3880b865-22ea-4c73-9bb3-931a3f09253d

Additional Information

Supporting Documents

www.tracopower.com/overview/tsr1e


Frequently Asked Questions

www.tracopower.com/glossary-faq

Glossary

www.tracopower.com/info/glossary.pdf

Outline Dimensions

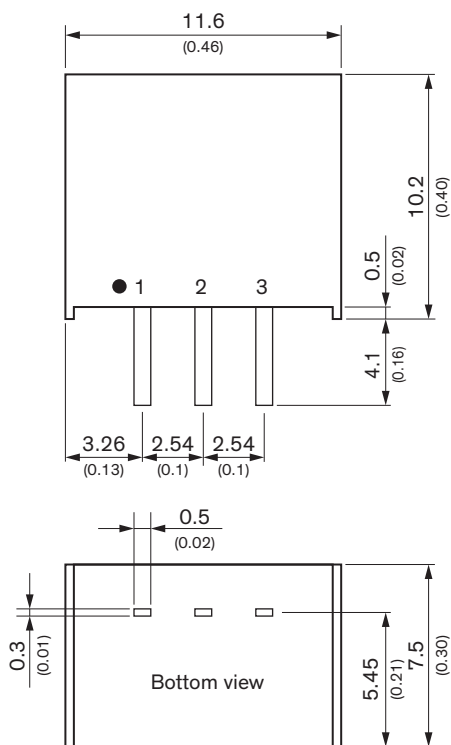


Pinout	
Pin	Function
1	+Vin
2	GND
3	+Vout

Dimensions in mm (inch)

Tolerances: x.x ± 0.5 (± 0.02)



x.xx ± 0.25 (± 0.01)

Pin dimension tolerance: ± 0.1 (± 0.04)



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View TSR 1-2450E on WIN SOURCE](#)
-  [Traco Power Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management