

Power Splitter/Combiner

ZAPD-2-272+

2 Way-0° 50Ω 800 to 2700 MHz

Maximum Ratings


Operating Temperature	-55°C to 90°C
Storage Temperature	-55°C to 100°C
Power Input (as splitter)	10W max.
Internal Dissipation	0.125W max.
DC Current	80mA (40mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

Outline Drawing

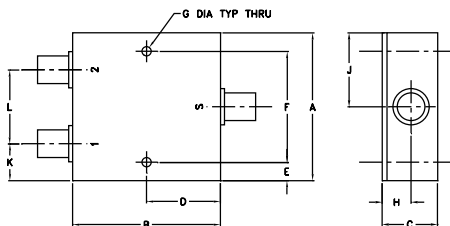

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
2.00	2.00	.75	1.00	.13	1.750	.125
50.80	50.80	19.05	25.40	3.30	44.45	3.18
H	J	K	L	wt		
.39	1.00	.50	1.00	grams		
9.91	25.40	12.70	25.40	170.0		

Electrical Schematic



Features

- wideband, 800-2700 MHz
- low insertion loss, 0.3 dB typ.
- good isolation, 25 dB typ.
- good amplitude unbalance, 0.05 dB typ. and phase unbalance, 0.7 deg. typ.

Applications

- LMDS • UHF
- VSAT • PCS
- GPS • cellular



Generic photo used for illustration purposes only

CASE STYLE: F53

Connectors	Model
SMA	ZAPD-2-272-S+
N-TYPE	ZAPD-2-272-N+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		800		2700	MHz
Insertion Loss Above 3.0 dB	800-2700	—	0.3	0.5	dB
Isolation	800-2700	18	22	—	dB
Phase Unbalance	800-2700	—	1.1	3.0	Degree
Amplitude Unbalance	800-2700	—	0.05	0.3	dB
VSWR (Port S)	800-2700	—	1.3	1.5	:1
VSWR (Port 1-2)	800-2700	—	1.2	1.3	:1

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amp. Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
800.00	3.26	3.25	0.01	21.81	0.14	1.36	1.15	1.15
1000.00	3.18	3.18	0.01	26.94	0.15	1.14	1.12	1.12
1200.00	3.18	3.17	0.01	23.70	0.16	1.05	1.07	1.08
1300.00	3.20	3.19	0.01	23.08	0.17	1.12	1.09	1.09
1400.00	3.22	3.21	0.01	23.37	0.18	1.18	1.11	1.11
1500.00	3.24	3.23	0.01	24.64	0.20	1.21	1.14	1.14
1600.00	3.25	3.24	0.01	27.07	0.21	1.22	1.15	1.15
1800.00	3.24	3.23	0.01	33.31	0.22	1.18	1.13	1.14
1900.00	3.23	3.22	0.01	29.63	0.23	1.13	1.10	1.11
2000.00	3.23	3.22	0.02	26.18	0.24	1.10	1.06	1.07
2200.00	3.25	3.23	0.01	23.30	0.26	1.13	1.04	1.05
2400.00	3.27	3.25	0.02	25.12	0.28	1.17	1.12	1.13
2500.00	3.27	3.25	0.02	28.78	0.29	1.15	1.14	1.16
2600.00	3.26	3.25	0.01	33.68	0.29	1.11	1.15	1.16
2700.00	3.27	3.25	0.01	26.93	0.30	1.09	1.13	1.14

1. Total Loss = Insertion Loss + 3dB splitter theoretical loss.

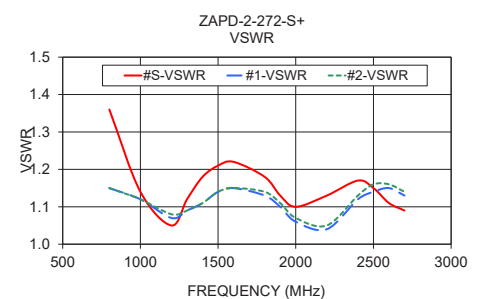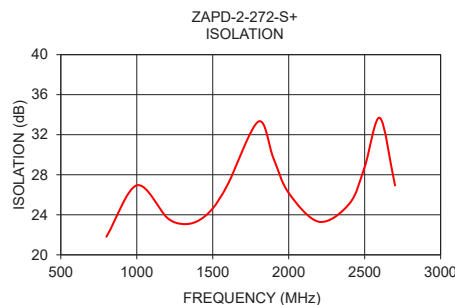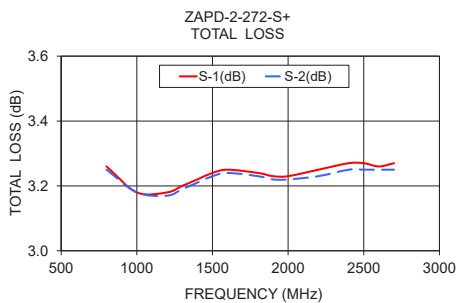

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ZAPD-2-272-S+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management