

# Power Splitter/Combiner

## ZAPD-2-272+

2 Way-0° 50Ω 800 to 2700 MHz

### Maximum Ratings


Operating Temperature	-55°C to 90°C
Storage Temperature	-55°C to 100°C
Power Input (as splitter)	10W max.
Internal Dissipation	0.125W max.
DC Current	80mA (40mA for each port)

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

### Outline Drawing

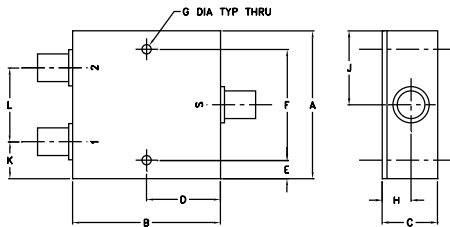

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
2.00	2.00	.75	1.00	.13	1.750	.125
50.80	50.80	19.05	25.40	3.30	44.45	3.18
H	J	K	L	wt		
.39	1.00	.50	1.00	grams		
9.91	25.40	12.70	25.40	170.0		

### Electrical Schematic



### Features

- wideband, 800-2700 MHz
- low insertion loss, 0.3 dB typ.
- good isolation, 25 dB typ.
- good amplitude unbalance, 0.05 dB typ. and phase unbalance, 0.7 deg. typ.

### Applications

- LMDS • UHF
- VSAT • PCS
- GPS • cellular



Generic photo used for illustration purposes only

CASE STYLE: F53

Connectors	Model
SMA	ZAPD-2-272-S+
N-TYPE	ZAPD-2-272-N+

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




### Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		800		2700	MHz
Insertion Loss Above 3.0 dB	800-2700	—	0.3	0.5	dB
Isolation	800-2700	18	22	—	dB
Phase Unbalance	800-2700	—	1.1	3.0	Degree
Amplitude Unbalance	800-2700	—	0.05	0.3	dB
VSWR (Port S)	800-2700	—	1.3	1.5	:1
VSWR (Port 1-2)	800-2700	—	1.2	1.3	:1

### Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amp. Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
800.00	3.26	3.25	0.01	21.81	0.14	1.36	1.15	1.15
1000.00	3.18	3.18	0.01	26.94	0.15	1.14	1.12	1.12
1200.00	3.18	3.17	0.01	23.70	0.16	1.05	1.07	1.08
1300.00	3.20	3.19	0.01	23.08	0.17	1.12	1.09	1.09
1400.00	3.22	3.21	0.01	23.37	0.18	1.18	1.11	1.11
1500.00	3.24	3.23	0.01	24.64	0.20	1.21	1.14	1.14
1600.00	3.25	3.24	0.01	27.07	0.21	1.22	1.15	1.15
1800.00	3.24	3.23	0.01	33.31	0.22	1.18	1.13	1.14
1900.00	3.23	3.22	0.01	29.63	0.23	1.13	1.10	1.11
2000.00	3.23	3.22	0.02	26.18	0.24	1.10	1.06	1.07
2200.00	3.25	3.23	0.01	23.30	0.26	1.13	1.04	1.05
2400.00	3.27	3.25	0.02	25.12	0.28	1.17	1.12	1.13
2500.00	3.27	3.25	0.02	28.78	0.29	1.15	1.14	1.16
2600.00	3.26	3.25	0.01	33.68	0.29	1.11	1.15	1.16
2700.00	3.27	3.25	0.01	26.93	0.30	1.09	1.13	1.14

1. Total Loss = Insertion Loss + 3dB splitter theoretical loss.

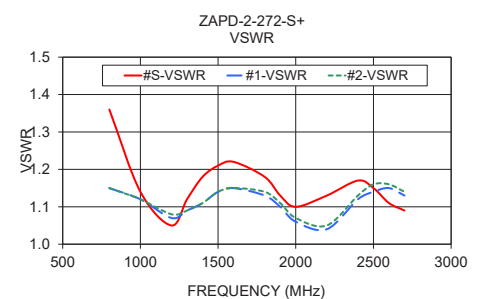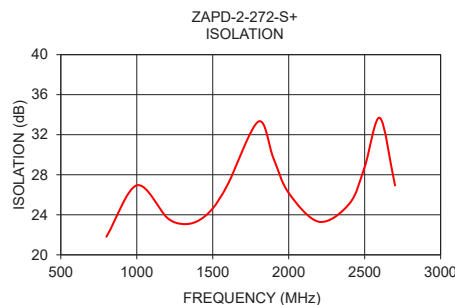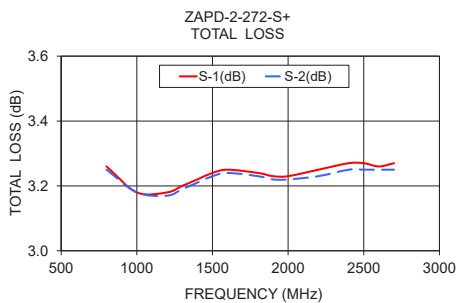

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View ZAPD-2-272-N+ on WIN SOURCE](#)
- ⊖ [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management