

Surface Mount Power Splitter/Combiner

SYPJ-2-222+

2 Way-180° 50Ω 500 to 2250 MHz



CASE STYLE: AH202-1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.05W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	8
PORT 1	4
PORT 2	5
GROUND	1,2,3,6,7


Outline Drawing

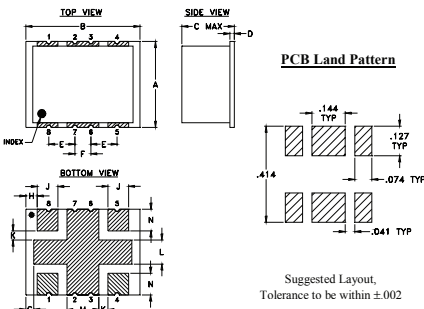

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.38	.50	.25	.020	.115	.070	.035
9.65	12.70	6.35	0.51	2.92	1.78	0.89
H	J	K	L	M	N	wt
.050	.090	.040	.105	.140	.095	grams
1.27	2.29	1.02	2.67	3.56	2.41	0.80

Demo Board MCL P/N: TB-427+ Suggested PCB Layout (PL-274)

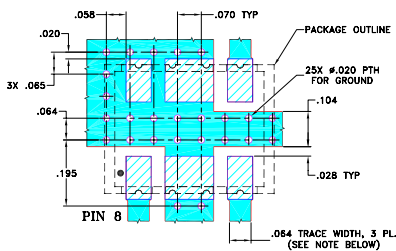

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

Features

- wideband, 500 to 2200 MHz
- low phase unbalance, 3.0 deg. typ.
- low amplitude unbalance, 0.6 dB typ.
- good isolation, 22 dB typ.

Applications

- VHF/UHF
- communication systems
- receivers & transmitters
- instrumentation
- CATV
- cellular, GPS, PCS




Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency		500		2250	MHz
Insertion Loss (above theoretical 3.0 dB)	500-900 900-1600 1600-2250	—	1.5 1.7 2.0	1.9 2.3 2.6	dB
Isolation	500-900 900-1600 1600-2250	18 20 15	22 25 19	—	dB
Phase Unbalance	500-900 900-1600 1600-2250	—	3.0 3.0 5.0	7.0 9.0 14.0	Degree
Amplitude Unbalance	500-900 900-1600 1600-2250	—	0.8 0.5 0.4	1.2 0.9 0.9	dB
VSWR (Port S)	500-2250	—	1.5	—	:1
VSWR (Port 1-2)	500-2250	—	1.5	—	:1

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
500	4.55	3.71	0.84	21.01	0.53	1.80	1.21	1.49
800	4.29	3.69	0.60	23.57	0.52	1.47	1.12	1.31
1000	4.19	3.75	0.44	25.92	1.19	1.25	1.13	1.17
1200	4.09	3.83	0.26	28.08	1.81	1.05	1.24	1.07
1400	4.20	4.03	0.17	27.54	2.58	1.18	1.40	1.16
1600	4.36	4.24	0.12	24.89	3.28	1.42	1.60	1.33
1800	4.60	4.47	0.14	22.46	4.07	1.64	1.82	1.53
2000	4.91	4.69	0.23	20.69	4.99	1.85	2.07	1.74
2100	5.08	4.80	0.29	20.03	5.32	1.93	2.20	1.84
2300	5.40	4.96	0.44	18.96	5.72	2.02	2.40	2.00

1. Total Loss = Insertion Loss + 3dB splitter theoretical loss.

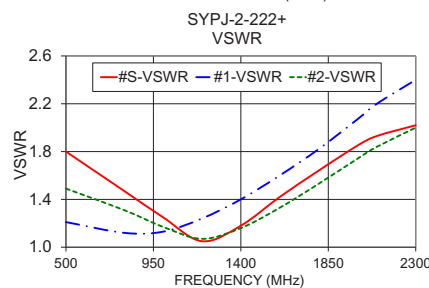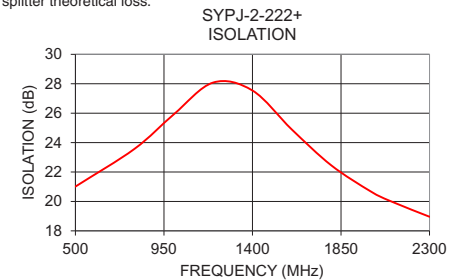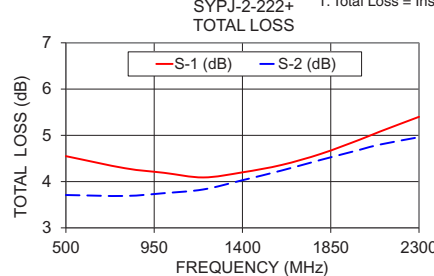

Electrical Schematic



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SYPJ-2-222+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management