


Surface Mount Power Splitter/Combiner

JSPQ-65W+

2 Way-90° 50Ω 5 to 65 MHz



CASE STYLE: BK276


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	2
PORT 1 (0°)	6
PORT 2 (90°)	9
GROUND	1,3,4,5,7,8,10,11,12,13,14


Outline Drawing

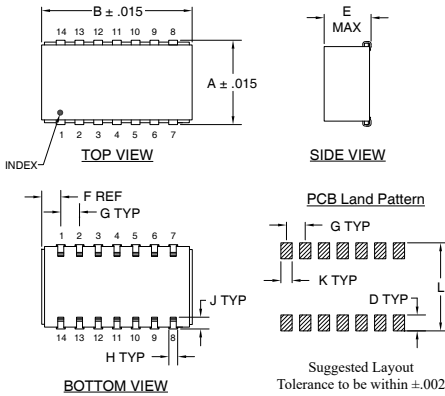

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.450	.803	--	.100	.250	.102
11.43	20.40	--	2.54	6.35	2.59
G	H	J	K	L	wt.
.100	.047	.065	.065	.470	grams
2.54	1.19	1.65	1.65	11.94	3.0

Demo Board MCL P/N: TB-444+ Suggested PCB Layout (PL-272)

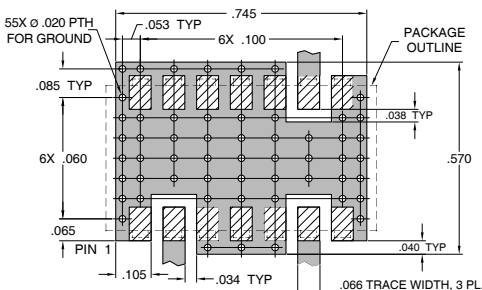

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030±.002", COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

NOTES:

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at <https://www.minicircuits.com/terms/viewterm.html>

Features

- wideband, 5 to 65 MHz
- excellent isolation, 33 dB typ.
- low insertion loss, 0.7 dB typ.
- aqueous washable

Applications




- LMDS base station
- instrumentation
- modulators

Splitter Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of coupled outputs less 3 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min.	Typ.	Max.	Max.	Max.
$f_L - f_U$						
5 - 65	33	25	0.7	1.5	5	0.7

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
5.00	3.29	3.24	0.05	35.32	90.78	1.10	1.26	1.12
10.00	3.27	3.21	0.06	36.70	89.97	1.09	1.21	1.05
15.00	3.40	3.32	0.09	36.43	87.91	1.12	1.22	1.06
20.00	3.46	3.35	0.11	35.69	87.88	1.19	1.27	1.15
25.00	3.49	3.36	0.13	34.92	88.82	1.27	1.36	1.23
30.00	3.56	3.40	0.16	34.22	89.86	1.35	1.44	1.31
32.00	3.60	3.42	0.18	33.97	90.19	1.38	1.47	1.33
34.00	3.64	3.45	0.19	33.74	90.42	1.41	1.50	1.36
36.00	3.69	3.49	0.20	33.53	90.61	1.43	1.53	1.38
40.00	3.80	3.57	0.22	33.15	90.88	1.48	1.59	1.41
45.00	3.93	3.65	0.28	32.75	90.74	1.53	1.65	1.45
50.00	4.01	3.71	0.31	32.39	90.30	1.57	1.70	1.47
55.00	4.10	3.76	0.35	32.10	89.69	1.60	1.75	1.48
60.00	4.15	3.78	0.37	31.79	88.90	1.63	1.80	1.49
65.00	4.20	3.79	0.40	31.48	88.01	1.66	1.84	1.49

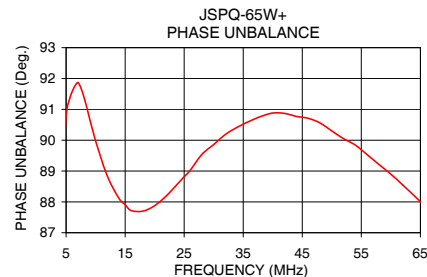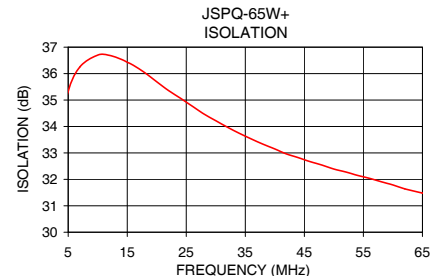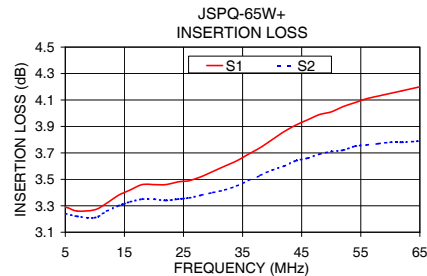

functional schematic

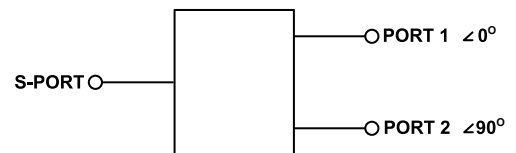

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View JSPQ-65W+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management