






THE DATASHEET OF
2744045447



** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE
B

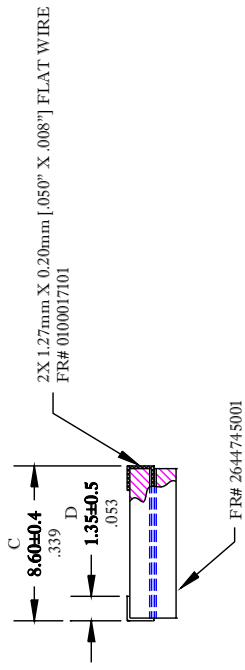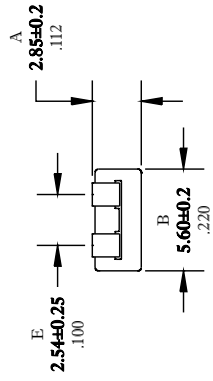

ELECTRICAL S

Imped
25 MHz
30 Min.

MINIMUM BREAKDOWN VOLTAGE :

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - WIRE TO BE OXYGEN FREE, HIGH CONDUCTIVITY COPPER.
- 2 - WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, FOR SOLDERABILITY.
- 3 - THIS PART TO MEET FAIR-RITE PRODUCTS CORP. VISUAL INSPECTION CRITERIA FOR SURFACE MOUNT BEADS.
- 4 - THIS PART TO MEET FAIR-RITE PRODUCTS CORP. SOP# ELC-27 FOR THERMAL SHOCK RESISTANCE.
- 5 - IMPEDANCE IS MEASURED ON A E4991A USING A 16092A TEST FIXTURE.
- 6 - COPLANARITY BETWEEN LEADS: **0.20mm** [.008"] MAX.

		FAIR-RITE	
		TITLE COMMON-M	
DRAWN BY	DATE	SIZE	B
D. FOOTE	9/10/2021		
CHKD BY			
APPRVD BY			SCA

FR# 44

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2744045447 on WIN SOURCE](#)

 [FAIR-RITE PRODUCTS](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management