




\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE  
B

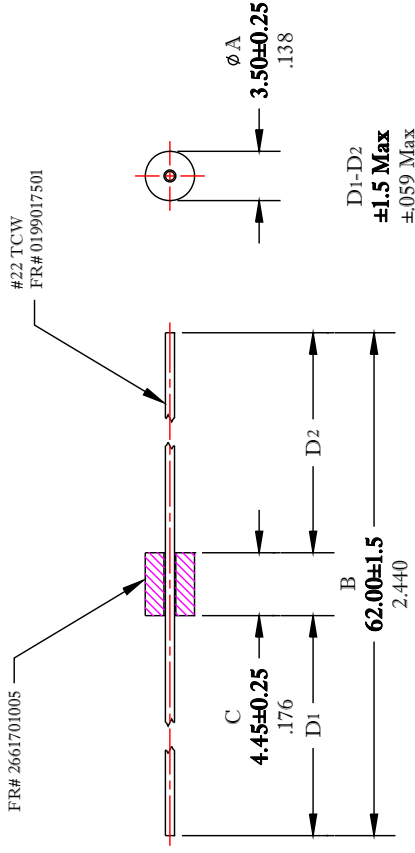

ELECTRICAL SP	
IMPEDANCE	SIZE
100 MHz	250
42 Min.	58

D1-D2  
±1.5 Max  
±.059 Max

DIMENSIONS  
**BOLD NUMBERS ARE IN MILLIMETERS**  
LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - PARTS TO MEET FAIR-RITE PRODUCTS CORP. GENERIC VISUAL INSPECTION CRITERIA FOR SHIELD BEADS.
- 2 - IMPEDANCE MEASURED ON A HP4191A, USING A 16092A TEST FIXTURE, WITH COMPENSATION, AND A WIRE LENGTH OF 15mm [.6"].
- 3 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55 SPECIFICATION FOR THERMAL SHOCK RESISTANCE.
- 4 - WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, SPECIFICATION FOR SOLDERABILITY.
- 5 - PART IS TAPED & REELED PER IEC 60286-1 & EIA RS296-F STANDARDS.

FR# 61

		TITLE		BEAD-01
		DRAWN BY	DATE	SIZE
		D. FOOTE	12/30/2019	B
		CHKD BY		
		APPRVD BY		SCAL

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2761001112 on WIN SOURCE](#)

 [FAIR-RITE PRODUCTS](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management