




THE DATASHEET OF
2744051447



** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE
B

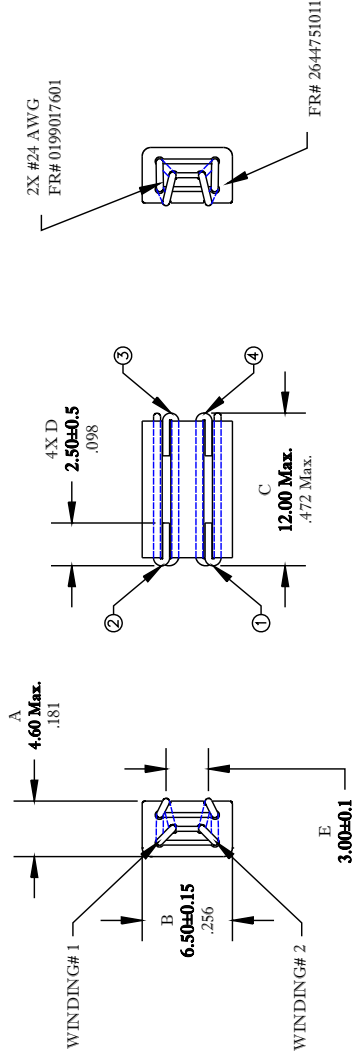

IMPEDANCE VALUE BETWEEN TERMINALS USING 7 AND 3, 16092A

Impedan	
25 MHz	10
80 MIN	18

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - PARTS MEETS FAIR-RITE PRODUCTS VISUAL INSPECTION CRITERIA FOR SURFACE MOUNT BEADS.
- 2 - PARTS MEET FAIR-RITE PRODUCTS SOP# ELC-27, FOR THERMAL SHOCK RESISTANCE.
- 3 - WIRE MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-57, FOR SOLDERABILITY.
- 4 - COPLANARITY BETWEEN LEADS: 0.15mm [.006"] Max.
- 5 - PARTS ARE SUPPLIED TAPED AND REELED PER IEC 60286-3 AND EIA 481 STANDARDS.
- 6 - PARTS ARE TO BE 100% TESTED & 100% CERTIFIED FOR BREAKDOWN VOLTAGE BETWEEN CONDUCTORS: 1000 Vdc.

FAIR-RITE		TITLE	
MULTI-TURN		MULTI-TURN	
DRAWN BY	DATE	SIZE	SCALE
D. FOOTE	9/17/2019	B	SCA
CHKD BY			
APPRVD BY			

FR# 44

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2744051447 on WIN SOURCE](#)

 [FAIR-RITE PRODUCTS](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management