





\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE  
B

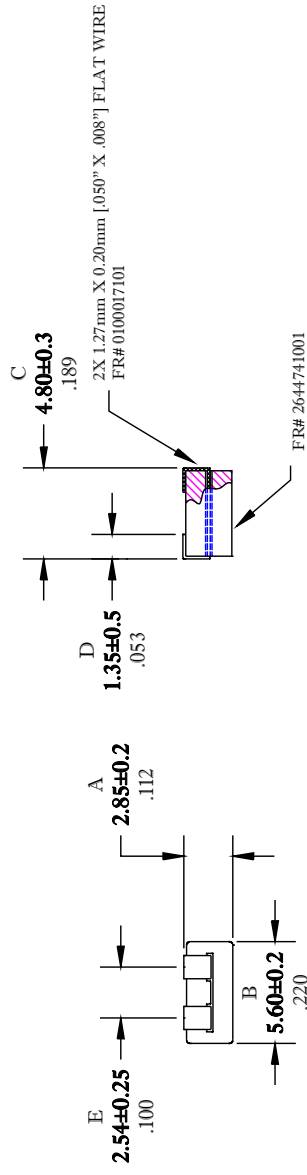

**DIMENSIONS**  
**BOLD NUMBERS ARE IN MILLIMETERS**  
LIGHT NUMBERS ARE IN INCHES

**NOTES:**

- 1 - WIRE TO BE OXYGEN FREE, HIGH CONDUCTIVITY COPPER.
- 2 - WIRE TO MEET SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 3 - THIS PART TO MEET FAIR-RITE PRODUCTS CORP. VISUAL INSPECTION CRITERIA FOR SURFACE MOUNT BEADS.
- 4 - THIS PART TO MEET FAIR-RITE PRODUCTS CORP. SOP# ELC-27 FOR THERMAL SHOCK RESISTANCE.
- 5 - IMPEDANCE IS MEASURED ON AN E4991A USING A 16092A TEST FIXTURE.
- 6 - COPLANARITY BETWEEN LEADS: **0.20mm** [.008"] MAX.

MINIMUM BREAKDOWN VOLTAGE

**ELECTRICAL**

Imp	
25 MHz	
16 Min.	

<b>FAIR-RITE</b>		TITLE	COMMON-M
		SIZE	B
DRAWN BY	DATE	FR# 44	
D. FOOTE	9/10/2021		
CHKD BY			
APPRVD BY			
		SCA	

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2744041447 on WIN SOURCE](#)

 [FAIR-RITE PRODUCTS](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management