




**THE DATASHEET OF**  
**OM-7604-C7-32.768KHZ-20PPM-TA-QC**




# OM-7604-C7

Low Power Clock Oscillator 32.768 kHz

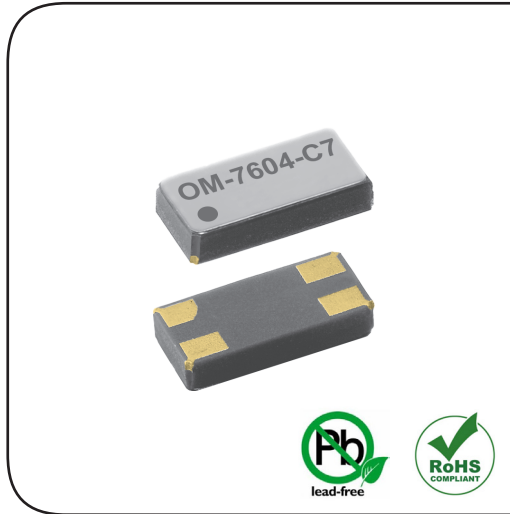

## DIMENSIONS

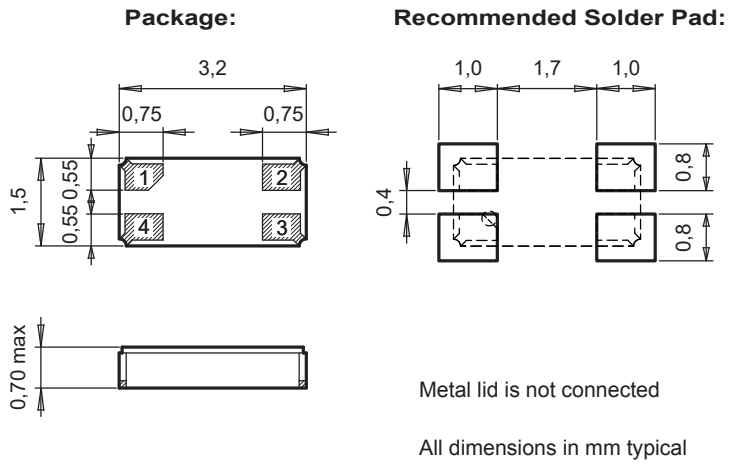

## APPLICATIONS

IoT  
 Metering  
 Industrial  
 Automotive  
 Health Care  
 Wearables, Portables


## DESCRIPTION

The OM-7604-C7 is a Low Frequency SMD Oscillator that incorporates an integrated CMOS circuit together with an XTAL. It operates under vacuum in a hermetically sealed ceramic package with metal lid.


## FEATURES

Wide supply voltage range.  
 Very low power consumption.  
 Synchronized CLKOUT enable/disable.  
 Small size, low profile, lightweight (10.6 mg).  
 High shock and vibration resistant.  
 100% Pb-free, RoHS-compliant.  
 Automotive qualification according to AEC-Q200 available.

## BLOCK DIAGRAM

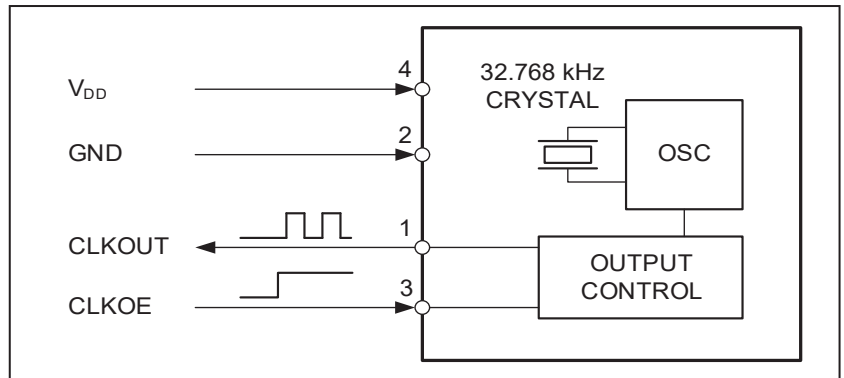

## PIN CONNECTIONS TOP VIEW

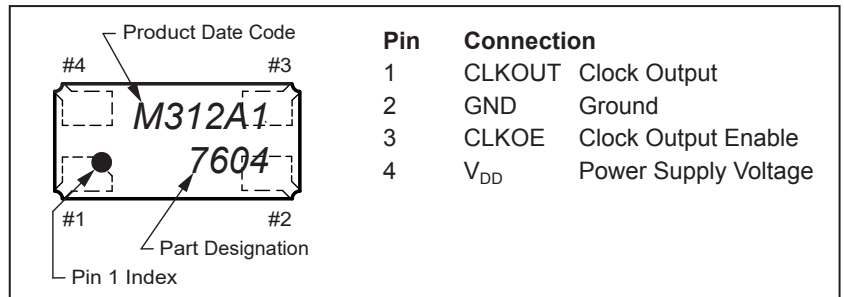

## ELECTRICAL CHARACTERISTICS AT 25°C

More detailed information can be found in the Application Manual.

Output Frequency	F	32.768	kHz
Frequency tolerance	<sup>1)</sup> ΔF/F	±20	ppm
Supply voltage	V <sub>DD</sub>	1.2 – 5.5	V
Current consumption (typ./max.)	<sup>2)</sup> I <sub>DD</sub>	0.3 / 0.5	μA
Duty cycle (min./max.)		40 / 60	%
Start up time (max.)	t <sub>start</sub>	0.5	s
Voltage coefficient (max.)		±1.5	ppm/V
Aging first year max. @ 25°C	ΔF/F	±3	ppm
Turnover temperature (typ.)	T <sub>0</sub>	25 ±5	°C
Frequency vs. temperature	ΔF/F <sub>0</sub>	-0.035 ppm/°C <sup>2</sup> (T - T <sub>0</sub> ) <sup>2</sup> ±10%	ppm

1) Tighter tolerances on request.

2) V<sub>DD</sub> = 3.0 V, CLKOE = LOW.


## ENVIRONMENTAL CHARACTERISTICS

	Conditions	Max. Dev.
Storage temperature range	-55 to +125°C	
TA Operating temperature range	-40 to +85°C	
TB Extended oper. temp. range	-40 to +125°C	
Shock resistance	ΔF/F 5000 g, 0.3 ms, ½ sine	±5 ppm
Vibration resistance	ΔF/F 20 g / 10–2000 Hz	±5 ppm

## TERMINATIONS AND PROCESSING

Package	Termination	Processing
SON-4	Au flashed pads	IPC/JEDEC J-STD-020C 260°C / 20 - 40 s

## FREQUENCY TEMPERATURE CHARACTERISTICS

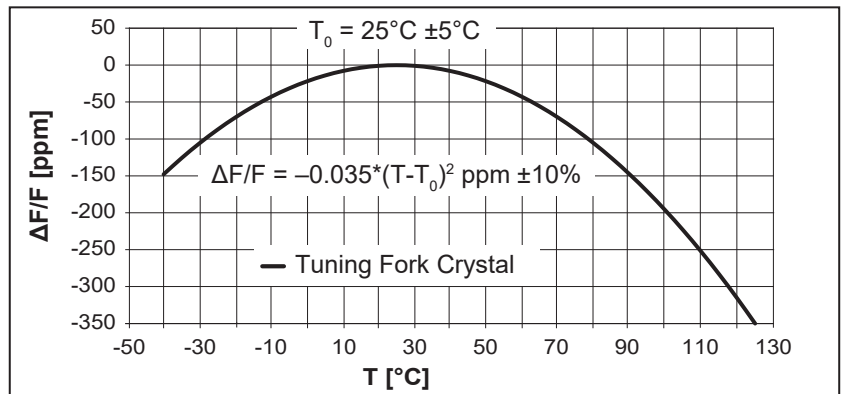

## ORDERING INFORMATION

**O M - 7604 - C7 ±20 ppm TA QC**

<b>Oscillator</b>		<b>Qualification</b>
<b>Metal lid</b>		<b>QC</b> = Commercial Grade (Standard)
<b>Frequency</b>	<b>7604</b> = 32.768 kHz	<b>QA</b> = Automotive Grade AEC-Q200
<b>Package size</b>	<b>C7</b> = 3.2 x 1.5 x 0.70 mm	<b>Temperature range</b>
		<b>TA</b> = -40 to +85°C (Standard)
		<b>TB</b> = -40 to +125°C
		<b>Frequency tolerance</b>
		±20 ppm
		Tighter freq. tolerances on request

A unique part number will be generated for each product specification, i.e:

20xxxx-MG01	1'000 pcs (in 12 mm tape on 7" reel)
20xxxx-MG03	3'000 pcs (in 12 mm tape on 7" reel)

All specifications subject to change without notice.





A COMPANY OF THE SWATCH GROUP

Micro Crystal AG  
Muehlestrasse 14  
CH-2540 Grenchen  
Switzerland

Phone +41 32 655 82 82  
sales@microcrystal.com  
www.microcrystal.com

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View OM-7604-C7-32.768kHz-20PPM-TA-QC on WIN SOURCE](#)
-  [Micro Crystal AG Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management