



**THE DATASHEET OF
NTCLG100E2103JT**



NTC Thermistors, Glass Encapsulated High Temperature Sensors



FEATURES

- Small diameter down to 1.8 mm
- Quick response time down to 0.9 s
- Wide temperature range from -40 °C to +200 °C
- Resistant to corrosive atmospheres and harsh environments
- Available in bulk or on tape
- Mounting: axial
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

| QUICK REFERENCE DATA | | |
|--|----------------------|----------|
| PARAMETER | VALUE | UNIT |
| Resistance value at 25 °C (R_{25}) | 10K to 220K | Ω |
| Tolerance on R_{25} -value | ± 5 | % |
| $B_{25/85}$ -value | 3797 to 3977 | K |
| Tolerance on $B_{25/85}$ -value | ± 1.3 to ± 3 | % |
| Operating temperature range | -40 to +200 | °C |
| Maximum power dissipation at 55 °C | 100 | mW |
| Dissipation factor | 2.5 | mW/K |
| Response time | 0.9 | s |
| Thermal time constant τ | 6 | s |
| Climatic category (LCT / UCT / days) | 40 / 200 / 56 | |
| Weight | ≈ 0.14 | g |

APPLICATIONS

High temperature measurement, sensing and control:

- Domestic appliances
- Industrial process control

DESIGN-IN SUPPORT

For complete curve computation, please visit: www.vishay.com/thermistors/ntc-curve-list/.

DESCRIPTION

These thermistors have a negative temperature coefficient and are mounted in a glass envelope:

NTCLG100E2...B (SOD27) with tinned copper-clad steel leads in bulk

NTCLG100E2...T is the taped on bandolier version

MOUNTING


By soldering, clamping or welding. Bending of the leads should be done at least 3 mm from the glass body and without exerting forces on the glass body.

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | |
|--|------------------------------|--------------------|---------------------------------|---|
| R_{25} (Ω) | R_{25} -TOL. (\pm %) | $B_{25/85}$ (K) | $B_{25/85}$ -TOL. (\pm %) | SAP MATERIAL AND ORDERING NUMBER NTCLG100E2... |
| 10 000 | 5 | 3977 | 1.3 | 103JB |
| 20 000 | 5 | 3977 | 1.3 | 203JB |
| 30 000 | 5 | 3977 | 1.3 | 303JB |
| 100 000 | 5 | 3977 | 1.3 | 104JB |
| 220 000 | 5 | 3797 | 3.0 | 224JB |


Note

- In SAP part replace last character by B for bulk and by T for taped components

DIMENSIONS in millimeters
Thermistors in bulk (NTCLG100E2...B)

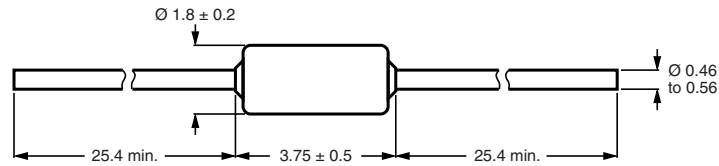


THERMISTORS ON BANDOLIER (NTCLG100E2...T)
Bandolier taped according to IEC 60286-1

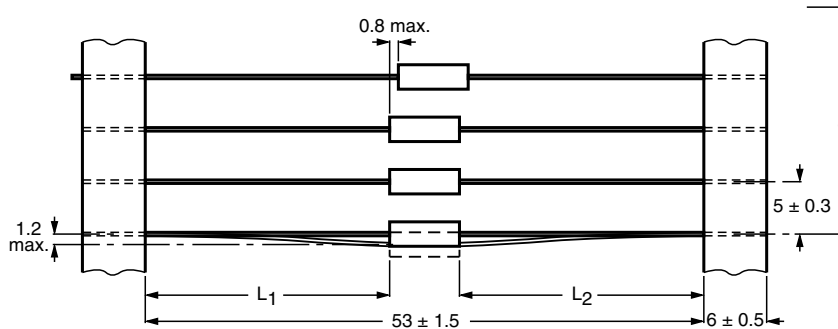

The components are centered so that $|L_1 - L_2| = 1.2 \text{ mm max.}$ The cumulative space (S) measured over 10 spacings = $50 \text{ mm} \pm 2 \text{ mm}$

DERATING

Power derating curve

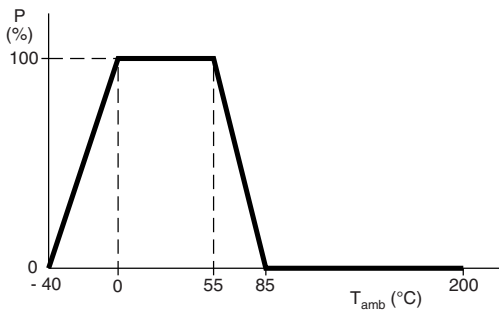


Note

- Zero power is considered as measuring power max. 1 % of rated power

STABILITY CHARACTERISTICS

Stability of glass encapsulated NTCs in thermal shock test (200 000 cycles $-40 \text{ }^\circ\text{C} / +200 \text{ }^\circ\text{C}$)

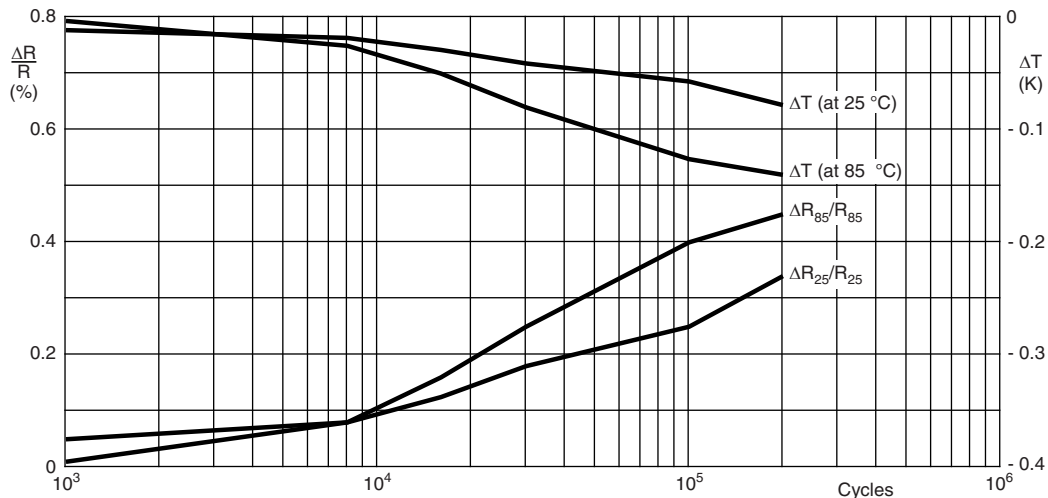



RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES FOR NTCLG100E2

| TEMPERATURE (°C) | R _T /R ₂₅ | R _T FOR 10 kΩ | R _T FOR 20 kΩ | R _T FOR 30 kΩ | R _T FOR 100 kΩ | R-TOL. (± %) | α (%/K) | T-TOL. (± °C) |
|------------------|---------------------------------|--------------------------|--------------------------|--------------------------|---------------------------|--------------|---------|---------------|
| -40 | 33.21 | 332 094 | 664 187 | 996 281 | 3 320 936 | 10.08 | -6.62 | 1.52 |
| -35 | 23.99 | 239 900 | 479 799 | 719 699 | 2 398 996 | 9.59 | -6.39 | 1.50 |
| -30 | 17.52 | 175 200 | 350 399 | 525 599 | 1 751 996 | 9.12 | -6.18 | 1.48 |
| -25 | 12.93 | 129 287 | 258 574 | 387 861 | 1 292 869 | 8.67 | -5.98 | 1.45 |
| -20 | 9.636 | 96 358 | 192 716 | 289 074 | 963 582 | 8.24 | -5.78 | 1.42 |
| -15 | 7.25 | 72 500 | 145 001 | 217 501 | 725 004 | 7.82 | -5.60 | 1.40 |
| -10 | 5.505 | 55 046 | 110 092 | 165 138 | 550 459 | 7.42 | -5.42 | 1.37 |
| -5 | 4.216 | 42 157 | 84 314 | 126 471 | 421 570 | 7.04 | -5.25 | 1.34 |
| 0 | 3.255 | 32 554 | 65 108 | 97 663 | 325 542 | 6.67 | -5.09 | 1.31 |
| 5 | 2.534 | 25 339 | 50 677 | 76 016 | 253 386 | 6.31 | -4.93 | 1.28 |
| 10 | 1.987 | 19 872 | 39 744 | 59 617 | 198 722 | 5.96 | -4.79 | 1.25 |
| 15 | 1.57 | 15 698 | 31 397 | 47 095 | 156 985 | 5.63 | -4.64 | 1.21 |
| 20 | 1.249 | 12 488 | 24 975 | 37 463 | 124 877 | 5.31 | -4.51 | 1.18 |
| 25 | 1.000 | 10 000 | 20 000 | 30 000 | 100 000 | 5.00 | -4.38 | 1.14 |
| 30 | 0.8059 | 8059 | 16 118 | 24 177 | 80 591 | 5.30 | -4.25 | 1.25 |
| 35 | 0.6535 | 6535 | 13 069 | 19 604 | 65 347 | 5.59 | -4.13 | 1.35 |
| 40 | 0.5330 | 5330 | 10 660 | 15 990 | 53 299 | 5.87 | -4.02 | 1.46 |
| 45 | 0.4372 | 4372 | 8743 | 13 115 | 43 717 | 6.14 | -3.91 | 1.57 |
| 50 | 0.3605 | 3605 | 7211 | 10 816 | 36 053 | 6.41 | -3.80 | 1.69 |
| 55 | 0.2989 | 2989 | 5977 | 8966 | 29 887 | 6.66 | -3.70 | 1.80 |
| 60 | 0.2490 | 2490 | 4980 | 7470 | 24 900 | 6.91 | -3.60 | 1.92 |
| 65 | 0.2084 | 2084 | 4169 | 6253 | 20 844 | 7.15 | -3.51 | 2.04 |
| 70 | 0.1753 | 1753 | 3506 | 5259 | 17 530 | 7.39 | -3.42 | 2.16 |
| 75 | 0.1481 | 1481 | 2962 | 4443 | 14 809 | 7.61 | -3.33 | 2.29 |
| 80 | 0.1256 | 1256 | 2513 | 3769 | 12 564 | 7.84 | -3.25 | 2.41 |
| 85 | 0.1070 | 1070 | 2141 | 3211 | 10 703 | 8.05 | -3.17 | 2.54 |
| 90 | 0.09154 | 915.4 | 1831 | 2746 | 9154 | 8.26 | -3.09 | 2.67 |
| 95 | 0.07860 | 786.0 | 1572 | 2358 | 7860 | 8.46 | -3.01 | 2.81 |
| 100 | 0.06773 | 677.3 | 1355 | 2032 | 6773 | 8.66 | -2.94 | 2.95 |
| 105 | 0.05857 | 585.7 | 1171 | 1757 | 5857 | 8.85 | -2.87 | 3.08 |
| 110 | 0.05083 | 508.3 | 1017 | 1525 | 5083 | 9.04 | -2.80 | 3.23 |
| 115 | 0.04426 | 442.6 | 885.2 | 1328 | 4426 | 9.22 | -2.74 | 3.37 |
| 120 | 0.03866 | 386.6 | 773.2 | 1160 | 3866 | 9.40 | -2.67 | 3.52 |
| 125 | 0.03387 | 338.7 | 677.5 | 1016 | 3387 | 9.57 | -2.61 | 3.66 |
| 130 | 0.02977 | 297.7 | 595.4 | 893.1 | 2977 | 9.74 | -2.55 | 3.81 |
| 135 | 0.02624 | 262.4 | 524.8 | 787.2 | 2624 | 9.91 | -2.50 | 3.97 |
| 140 | 0.02319 | 231.9 | 463.8 | 695.7 | 2319 | 10.07 | -2.44 | 4.12 |
| 145 | 0.02055 | 205.5 | 411.1 | 616.6 | 2055 | 10.23 | -2.39 | 4.28 |
| 150 | 0.01826 | 182.6 | 365.3 | 547.9 | 1826 | 10.38 | -2.34 | 4.44 |
| 155 | 0.01627 | 162.7 | 325.4 | 488.1 | 1627 | 10.53 | -2.29 | 4.60 |
| 160 | 0.01453 | 145.3 | 290.6 | 435.9 | 1453 | 10.67 | -2.24 | 4.77 |
| 165 | 0.01301 | 130.1 | 260.1 | 390.2 | 1301 | 10.82 | -2.19 | 4.94 |
| 170 | 0.01167 | 116.7 | 233.4 | 350.1 | 1167 | 10.96 | -2.15 | 5.11 |
| 175 | 0.01049 | 104.9 | 209.9 | 314.8 | 1049 | 11.09 | -2.10 | 5.28 |
| 180 | 0.009457 | 94.57 | 189.1 | 283.7 | 945.7 | 11.23 | -2.06 | 5.45 |
| 185 | 0.008541 | 85.41 | 170.8 | 256.2 | 854.1 | 11.36 | -2.02 | 5.63 |
| 190 | 0.007729 | 77.29 | 154.6 | 231.9 | 772.9 | 11.49 | -1.98 | 5.81 |
| 195 | 0.007009 | 70.09 | 140.2 | 210.3 | 700.9 | 11.61 | -1.94 | 5.99 |
| 200 | 0.006367 | 63.67 | 127.3 | 191.0 | 636.7 | 11.73 | -1.90 | 6.17 |



| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES FOR NTCLG100E2 | | | | | |
|---|--------------|------------------|--------------|----------------|---------------|
| TEMPERATURE (°C) | R_T/R_{25} | R_T FOR 220 kΩ | R-TOL. (± %) | α (%/K) | T-TOL. (± °C) |
| -40 | 25.78 | 5 672 264 | 16.18 | -6.07 | 2.67 |
| -35 | 19.13 | 4 207 576 | 15.11 | -5.88 | 2.57 |
| -30 | 14.32 | 3 150 400 | 14.07 | -5.70 | 2.47 |
| -25 | 10.82 | 2 380 124 | 13.08 | -5.52 | 2.37 |
| -20 | 8.244 | 1 813 764 | 12.13 | -5.35 | 2.27 |
| -15 | 6.335 | 1 393 675 | 11.22 | -5.19 | 2.16 |
| -10 | 4.907 | 1 079 442 | 10.34 | -5.03 | 2.05 |
| -5 | 3.829 | 842 474 | 9.49 | -4.88 | 1.94 |
| 0 | 3.011 | 662 373 | 8.67 | -4.74 | 1.83 |
| 5 | 2.384 | 524 457 | 7.88 | -4.60 | 1.71 |
| 10 | 1.900 | 418 080 | 7.13 | -4.47 | 1.59 |
| 15 | 1.525 | 335 455 | 6.39 | -4.34 | 1.47 |
| 20 | 1.231 | 270 847 | 5.68 | -4.22 | 1.35 |
| 25 | 1.000 | 220 000 | 5.00 | -4.10 | 1.22 |
| 30 | 0.817 | 179 734 | 5.66 | -3.99 | 1.42 |
| 35 | 0.6712 | 147 656 | 6.30 | -3.88 | 1.63 |
| 40 | 0.5543 | 121 952 | 6.92 | -3.77 | 1.83 |
| 45 | 0.4602 | 101 242 | 7.52 | -3.67 | 2.05 |
| 50 | 0.3839 | 84 466 | 8.10 | -3.58 | 2.27 |
| 55 | 0.3218 | 70 806 | 8.67 | -3.48 | 2.49 |
| 60 | 0.2710 | 59 627 | 9.21 | -3.39 | 2.72 |
| 65 | 0.2293 | 50 436 | 9.75 | -3.30 | 2.95 |
| 70 | 0.1947 | 42 844 | 10.26 | -3.22 | 3.19 |
| 75 | 0.1661 | 36 544 | 10.76 | -3.14 | 3.43 |
| 80 | 0.1422 | 31 294 | 11.25 | -3.06 | 3.67 |
| 85 | 0.1223 | 26 901 | 11.72 | -2.99 | 3.92 |
| 90 | 0.1055 | 23 210 | 12.18 | -2.92 | 4.18 |
| 95 | 0.09135 | 20 096 | 12.63 | -2.85 | 4.44 |
| 100 | 0.07936 | 17 460 | 13.06 | -2.78 | 4.70 |
| 105 | 0.06918 | 15 220 | 13.49 | -2.71 | 4.97 |
| 110 | 0.06050 | 13 310 | 13.90 | -2.65 | 5.24 |
| 115 | 0.05307 | 11 676 | 14.30 | -2.59 | 5.52 |
| 120 | 0.04670 | 10 273 | 14.69 | -2.53 | 5.81 |
| 125 | 0.04121 | 9065 | 15.08 | -2.47 | 6.09 |
| 130 | 0.03646 | 8022 | 15.45 | -2.42 | 6.39 |
| 135 | 0.03235 | 7117 | 15.81 | -2.37 | 6.68 |
| 140 | 0.02878 | 6332 | 16.17 | -2.31 | 6.99 |
| 145 | 0.02567 | 5647 | 16.51 | -2.26 | 7.29 |
| 150 | 0.02295 | 5049 | 16.85 | -2.22 | 7.61 |
| 155 | 0.02057 | 4525 | 17.18 | -2.17 | 7.92 |
| 160 | 0.01847 | 4064 | 17.50 | -2.12 | 8.24 |
| 165 | 0.01663 | 3659 | 17.82 | -2.08 | 8.57 |
| 170 | 0.01501 | 3301 | 18.13 | -2.04 | 8.90 |
| 175 | 0.01357 | 2985 | 18.43 | -2.00 | 9.24 |
| 180 | 0.01229 | 2704 | 18.72 | -1.95 | 9.58 |
| 185 | 0.01116 | 2455 | 19.01 | -1.92 | 9.92 |
| 190 | 0.01015 | 2233 | 19.29 | -1.88 | 10.27 |
| 195 | 0.009247 | 2034 | 19.57 | -1.84 | 10.63 |
| 200 | 0.008442 | 1857 | 19.84 | -1.81 | 10.99 |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.


Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NTCLG100E2103JT on WIN SOURCE](#)

 [Vishay Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management