




**THE DATASHEET OF
PTS820 J25K SMTR LFS**



PTS820 Series

Microminiature SMT Top Actuated

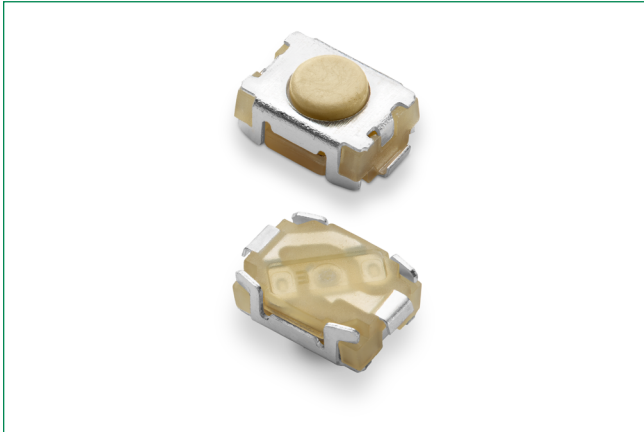

Description

The PTS820 series of microminiature SMT top actuated switches have a 3.9 x 2.9mm footprint and feature the option for three different heights. When combined with a reputation for being long-lasting and reliable, these switches are perfect for any keyless entry, remote control or control panel application a designer can dream up.

Features & Benefits

- 3.9 x 2.9 mm footprint
- Three different heights
- High number of cycles
- Reduced footprint

Applications

- Control panels
- Nomad devices
- Remote controls
- Keyless entry system

Specifications

Function	Momentary action
Contact Arrangement	1 make contact = SPST NO
Terminals	J type for SMT
Travel	0.2mm + 0.1mm / -0.05 mm


Electrical Characteristics

Max. Voltage	12 VDC
Max. Current DC	50 mA
Dielectric Strength	100 VA C (1mn)
Contact Resistance	≤ 100 mΩ
Insulation Resistance	≥ 100 MΩ
Bounce Time	≤ 10 ms


Environmental Characteristics

Operating Temperature	-40°C to 85°C
------------------------------	---------------

Dimensions (mm)

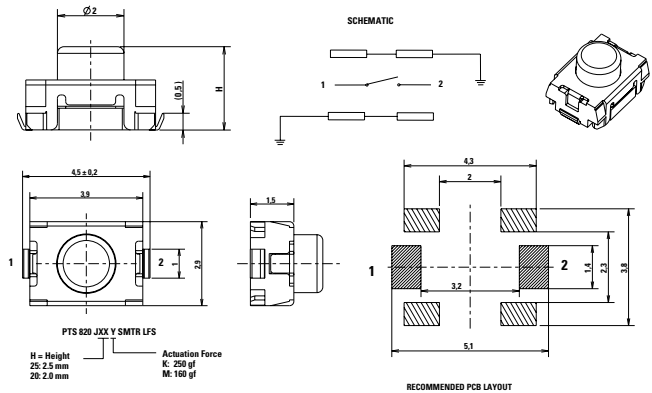

1.5 mm height (H) - version shown here with pegs

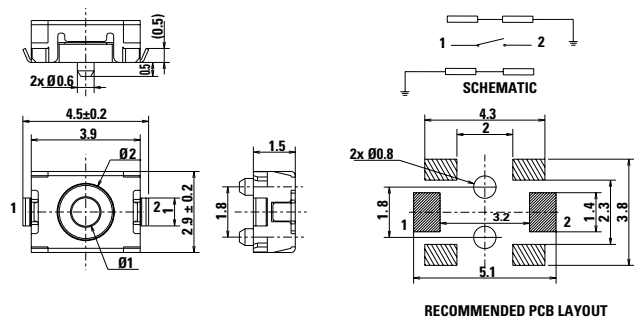

PTS820 Series

Microminiature SMT Top Actuated




Mechanical Characteristics

Item Description	Operation Force (gf)	Life Cycles	Height mm	Pegs
PTS820 J25M SMTR LFS	160 ± 50	200,000	2.5	No
PTS820 J25K SMTR LFS	250 ± 50	100,000		Yes
PTS820 J25MP SMTR LFS	160 ± 50	200,000		No
PTS820 J25KP SMTR LFS	250 ± 50	100,000		Yes
PTS820 J20M SMTR LFS	160 ± 50	200,000	2.0	No
PTS820 J20K SMTR LFS	250 ± 50	100,000		Yes
PTS820 J20MP SMTR LFS	160 ± 50	200,000		No
PTS820 J20KP SMTR LFS	250 ± 50	100,000	1.5	Yes
PTS820 J15M SMTR LFS	160 ± 50	200,000		No
PTS820 J15K SMTR LFS	250 ± 50	100,000		Yes
PTS820 J15MP SMTR LFS	160 ± 50	200,000		No
PTS820 J15KP SMTR LFS	250 ± 50	100,000	Yes	Yes

Note:
 Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center. The PTS series is not certified for using in Automotive application and no PPAP. However, in the case of some automotive accessories and specific applications for 2 and 3 wheeled vehicles the PTS is widely used and very suitable. Please contact your local C&K representative to discuss your application and the best switch solution.

Soldering Profile

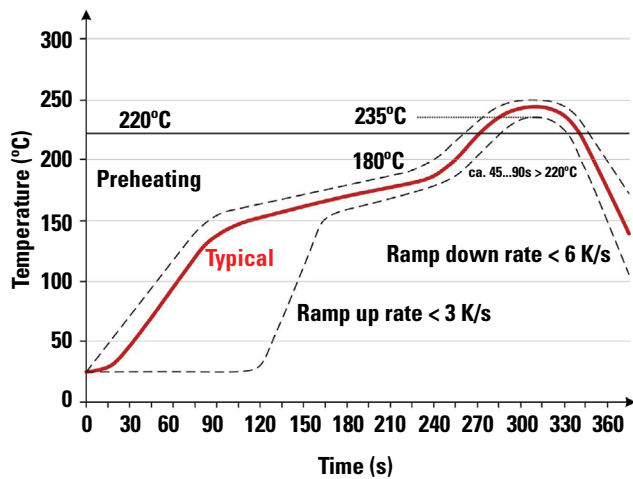

Soldering process: Depending on the application, this component is suited to the following methods:

- This component is suited to the following methods: Infrared Reflow Soldering in accordance with J-STD-020
- Terminals being silver or gold plated over a nickel barrier, the use of slightly activated flux is suitable.
- Lead free soldering process in accordance with the definition on the left.

Note: Up to 2 reflow cycles in accordance with the above temperature profile

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View PTS820 J25K SMTR LFS on WIN SOURCE](#)
- ⊖ [C&K Components Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management