



**THE DATASHEET OF
MS621T**




MS Lithium Rechargeable Battery MS621T (Wide range temperature)

SPECIFICATIONS

Type	MS621T
Operating Temperature Range (°C)	-40~+85
Nominal Voltage(V)	3
Charge Voltage (Standard Charge Voltage) (V)	2.8 to 3.3 (3.1)
Nominal Capacity(mAh)	3.0
Internal Impedance(Ω)	80
Standard Charge Discharge Current(mA)	0.015
Maximum Discharge Current (Continuous) (mA)	0.1
Size Diameter(mm)	6.8
Size Height(mm)	2.1
Weight(g)	0.23

Terminals




MS621T FL11E



CHARACTERISTICS


Charge-Discharge Characteristics

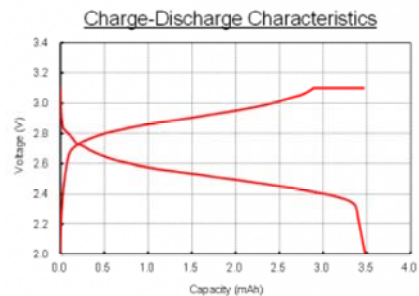

【 Charge-Discharge Condition 】

Charge	CC,CV	3.1V, max100uA, 96hr
Discharge	CC	15uA, COV=2.0V

High Temperature Characteristics

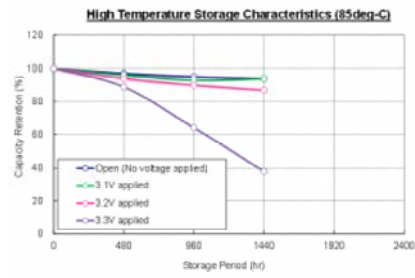

【 Storage Condition 】 85deg.-C, **V Impressed



【 Charge-Discharge Condition 】

Charge	CC,CV	3.1V, max100uA, 96hr, RT
Discharge	CC	15uA, cov=2.0V, RT

Copyright © Seiko Instruments Inc. 2016, All Rights Reserved.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View MS621T on WIN SOURCE](#)
-  [Seiko Instruments](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management