



ULTRA-SMALL CERAMIC

# Power Splitter/Combiner


## QCN-7D+

Mini-Circuits

2 Way-90° 50Ω 425 to 675 MHz

### FEATURES

- Low insertion loss, 0.4 dB typ.
- Wrap-around terminal for excellent solderability
- Ultra small, 0.12"x0.06"x0.035"



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Balanced amplifiers
- Modulators
- UHF

### ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		425		675	MHz
Average Insertion Loss, above 3.0 dB	425-550		0.4	0.7	dB
	550-675		0.6	1.1	
Isolation	425-550	13	17		dB
	550-675	11	17		
Phase Unbalance	425-550		2	8	Degree
	550-675		4	8	
Amplitude Unbalance	425-550		0.5	1.0	dB
	550-675		0.5	1.0	
VSWR	425-550		1.3		(:1)
	550-675		1.4		


1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
Power Input (as a splitter)	15 W* max.

\* Derate linearly to 7 W at +100°C ambient. Permanent damage may occur if any of these limits are exceeded.

### ELECTRICAL SCHEMATIC (NOTE 1)



Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. L  
ECO-010256  
QCN-7D+  
ED-10849/1  
MCL NY  
250718  
PAGE 1 OF 3



ULTRA-SMALL CERAMIC

# Power Splitter/Combiner

QCN-7D+

Mini-Circuits


2 Way-90° 50Ω 425 to 675 MHz

## PIN CONNECTIONS

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

## PRODUCT MARKING: D

DEMO BOARD MCL P/N: TB-QCN-7D+  
SUGGESTED PCB LAYOUT (PL-131)

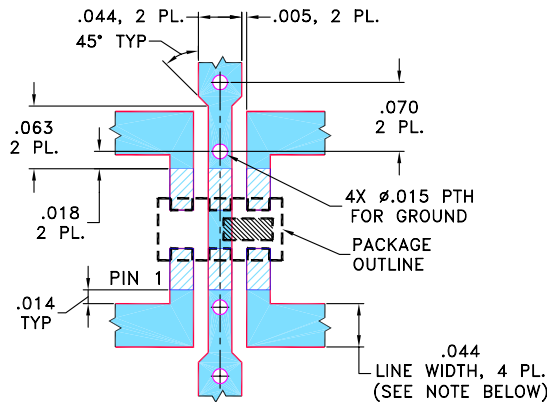


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## OUTLINE DRAWING

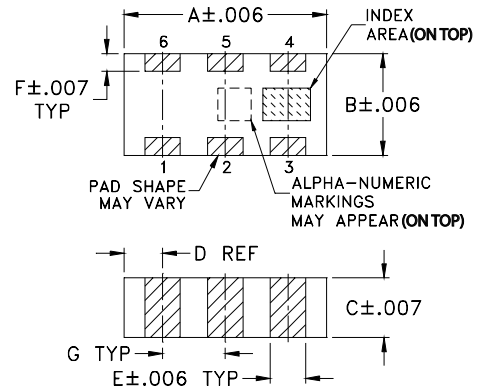

## PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002

## OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

## TAPE & REEL INFORMATION: F75



ULTRA-SMALL CERAMIC

# Power Splitter/Combiner

QCN-7D+




Mini-Circuits

2 Way-90° 50Ω 425 to 675 MHz

## TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss <sup>2</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
425	3.08	3.77	0.69	16.15	85.67	1.32	1.30	1.26
435	3.12	3.73	0.60	16.11	85.69	1.32	1.30	1.26
445	3.15	3.66	0.51	16.05	85.67	1.32	1.29	1.26
470	3.25	3.57	0.31	15.95	85.82	1.32	1.29	1.26
500	3.36	3.51	0.15	15.81	85.95	1.32	1.28	1.26
530	3.46	3.48	0.02	15.64	86.13	1.32	1.28	1.26
555	3.50	3.47	0.03	15.46	86.29	1.33	1.29	1.27
570	3.51	3.49	0.02	15.33	86.45	1.34	1.29	1.27
585	3.51	3.50	0.00	15.19	86.51	1.35	1.29	1.28
600	3.50	3.52	0.02	15.03	86.83	1.35	1.30	1.29
620	3.46	3.57	0.11	14.77	87.07	1.37	1.31	1.30
630	3.45	3.60	0.15	14.65	87.17	1.38	1.32	1.31
645	3.43	3.67	0.24	14.44	87.49	1.40	1.33	1.33
660	3.38	3.76	0.38	14.21	87.82	1.42	1.34	1.35
675	3.34	3.87	0.53	13.96	88.21	1.44	1.36	1.37

2. Total Loss = Insertion Loss + 3 dB splitter loss.

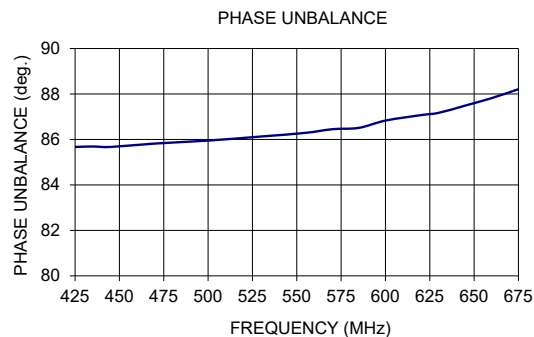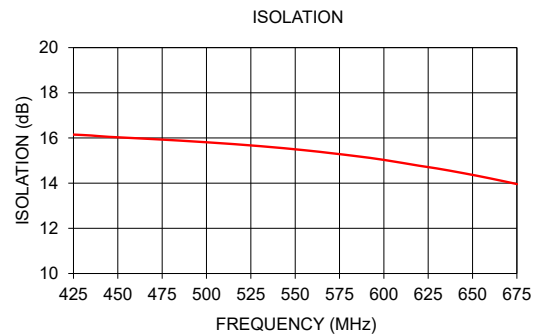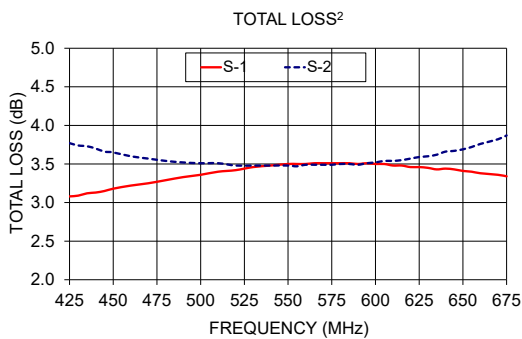

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View QCN-7D+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management