



**THE DATASHEET OF
ULT2G6R8MNL1GS**




ALUMINUM ELECTROLYTIC CAPACITORS

ULT Chip Type, High Voltage.
High Temperature Range.



- Chip type, high voltage and high temperature range.
- Load life of 2000 hours at +125°C.
- Applicable to automatic mounting machine using carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.




Specifications

Item	Performance Characteristics	
Category Temperature Range	-40 to +125°C	
Rated Voltage Range	160 to 500V	
Rated Capacitance Range	1.8 to 33μF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Leakage Current ※	Rated voltage (V)	160-450
	-	0.04CV+100(μA)max.(1 minute's at 20°C)
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C	
	Rated voltage (V)	160 200 250 400 450 500
Stability at Low Temperature	Measurement frequency : 120Hz	
	Impedance ratio ZT / Z20 (max.)	6 6 10 10 15 15
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 125°C.	
	Capacitance change	tan δ
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.	
	Capacitance change	tan δ
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the characteristic requirements listed at right when they are removed from the plate.	
	Capacitance change	tan δ
Marking	Black print on the case top.	

※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)


Chip Type

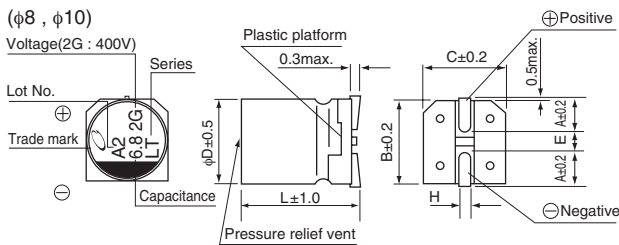

(mm)	8x10	10x10	10x13.5
A	2.9	3.2	3.2
B	8.3	10.3	10.3
C	8.3	10.3	10.3
E	3.1	4.5	4.5
L	10	10	13.5
H	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1

Voltage	V	160	200	250	400	450	500
Code	2C	2D	2E	2G	2W	2H	

Type numbering system (Example : 400V 6.8μF)

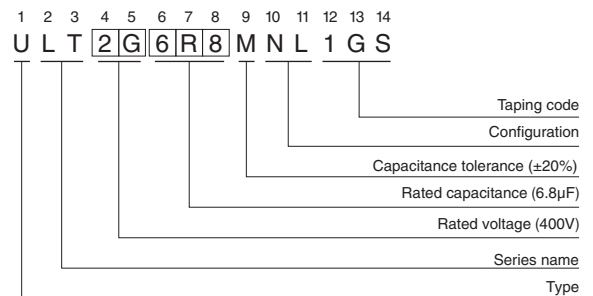

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

● Dimension table in next page.

ULT

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D \times L (mm)	tan δ	Leakage Current (μ A) (at 20°C after 1 minute)	Rated Ripple (mArms) (125°C/120Hz)	Part Number
160 (2C)	15	8 \times 10	0.20	196	45	ULT2C150MNL1GS
	22	10 \times 10	0.20	240.8	60	ULT2C220MNL1GS
	33	10 \times 13.5	0.20	311.2	65	ULT2C330MNL1GS
200 (2D)	12	8 \times 10	0.20	196	45	ULT2D120MNL1GS
	18	10 \times 10	0.20	244	60	ULT2D180MNL1GS
	27	10 \times 13.5	0.20	316	65	ULT2D270MNL1GS
250 (2E)	8.2	8 \times 10	0.25	182	30	ULT2E8R2MNL1GS
	15	10 \times 10	0.25	250	45	ULT2E150MNL1GS
	18	10 \times 13.5	0.25	280	50	ULT2E180MNL1GS
400 (2G)	3.9	8 \times 10	0.25	162.4	30	ULT2G3R9MNL1GS
	6.8	10 \times 10	0.25	208.8	45	ULT2G6R8MNL1GS
	10	10 \times 13.5	0.25	260	50	ULT2G100MNL1GS
450 (2W)	3.3	8 \times 10	0.30	159.4	20	ULT2W3R3MNL1GS
	5.6	10 \times 10	0.30	200.8	35	ULT2W5R6MNL1GS
	7.5	10 \times 13.5	0.30	235	40	ULT2W7R5MNL1GS
500 (2H)	1.8	8 \times 10	0.30	236	20	ULT2H1R8MNL1GS
	3.3	10 \times 10	0.30	266	35	ULT2H3R3MNL1GS
	4.7	10 \times 13.5	0.30	294	40	ULT2H4R7MNL1GS

- For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ULT2G6R8MNL1GS on WIN SOURCE](#)

 [Nichicon](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management