



**THE DATASHEET OF**  
**189-015-613R571**



PORT D-SUB - MALE OVER MALE

25 PIN  
SHOWN


DIMENSIONS - INCHES [MM]					
POS	9	15	25	37	
A	1.204 [30.58]	1.535 [38.99]	2.078 [52.78]	2.724 [69.19]	
B	0.984 [24.99]	1.312 [33.32]	1.850 [46.99]	2.500 [63.50]	
C	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	

**SPECIFICATION:**

**MATERIAL:** STEEL, NICKEL PLATED  
**SHELL:** UL 94V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.  
**INSULATOR:** BRASS  
**CONTACTS:** GOLD PLATED ENTIRE CONTACT

**ELECTRICAL:**  
**INSULATOR RESISTANCE:** 1,000 Ohms Min.  
**DIELECTRIC STRENGTH:** 1,000V/AC RMS  
**CURRENT RATING:** 5 AMPS  
**OPERATING TEMPERATURE:** -55° C TO 105° C

189-YYY-613R571

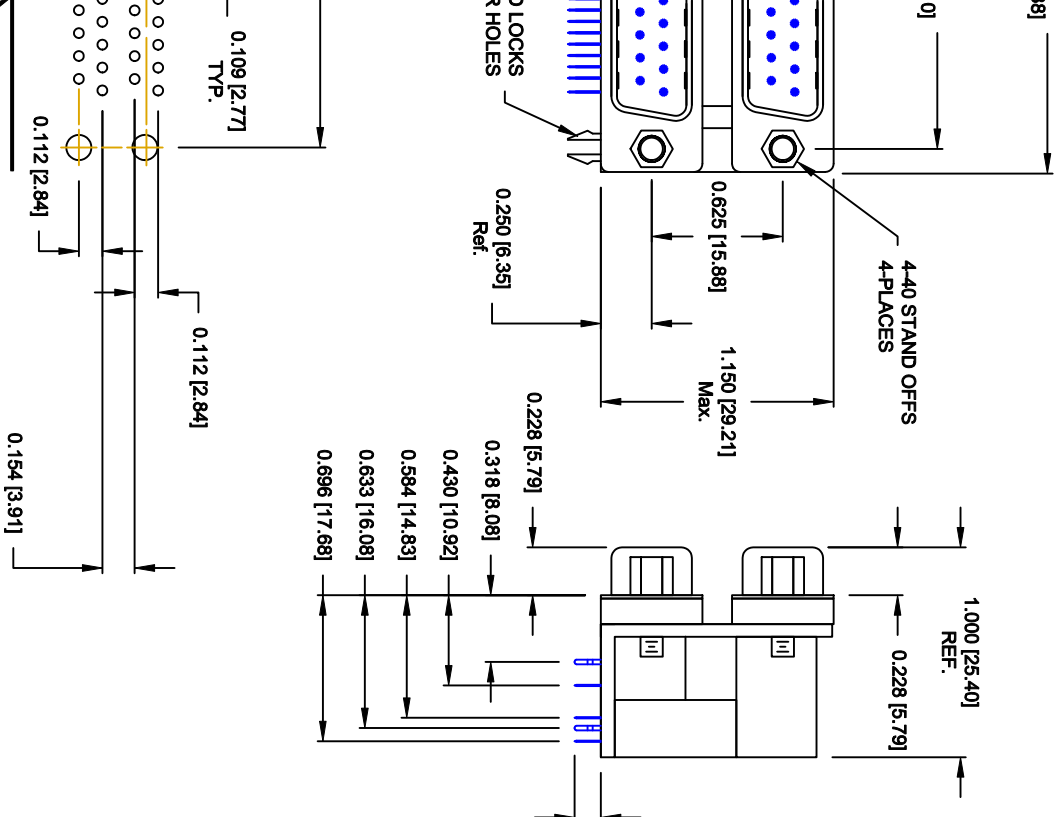

**DO NOT SCALE FROM DRAWING**

**SERIES POSITIONS**  
 009  
 015  
 025  
 037

**GENDER**  
 31 = FEMALE OVER MALE  
 41 = FEMALE OVER FEMALE  
 51 = FEMALE OVER FEMALE  
 61 = MALE OVER MALE

**SHELL PLATING**  
 3 = NICKEL

**ROHS COMPLIANT (HIGH TEMP. PROCESS)**

**HARDWARE OPTIONS**  
 57 = 4-40 STAND OFFS/BOARD LOCKS

**PLATING OPTIONS**  
 1 = GOLD FLASH (ENTIRE CONTACT)  
 A = 30U" GOLD MATING AREA/GOLD FLASH TAILS  
 9 = 30U" GOLD MATING AREA/TN TAILS

**THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.**

**DRAWN:** C. SMITH  
**DATE:** 03-30-07

**CHECKED:** \_\_\_\_\_  
**DATE:** \_\_\_\_\_

**SCALE:** 1:1  
**SHEET** 1 **OF** 1  
**REV** 9

MPPLIANT

NorComp

DWG NO. 189-YYY-613R571

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 189-015-613R571 on WIN SOURCE](#)

 [NorComp Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management