




**THE DATASHEET OF
GLX-A-44-BLK**



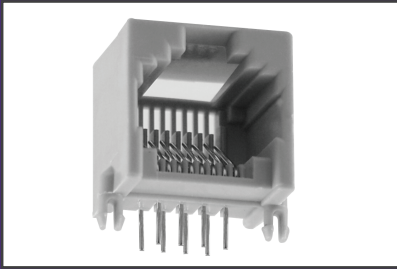

MODULAR JACKS AND PLUGS: GLX Series

Right Angle Modular Jack

Product Features

- 0.570" Height
- Snap-In Board Retention Tabs
- Available in 4, 6, 8 and 10 Position Housings
- CSA/NRTL Certified File No. LR78160
- UL File No. E134345

Performance Specifications

Materials and Finish

Housing Material

PBT Thermoplastic, UL 94V-0 Rated

Contact Material

Phosphor Bronze

Electrical Characteristics

Insulation Resistance

500 Megohms Min.

Dielectric Withstanding Voltage

1000V RMS, 60Hz

Contact Resistance

20 milliohms Max.

Current Rating

1.5A

Voltage Rating

125V DC

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number



Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series		Shield Option	Positions & Contacts	Color Option

Series

GLX - Right Angle Modular Jack

Shield Options

- A - Non-Shielded with Panel Stops
- N - Non-Shielded without Panel Stops

Number of Positions / Contacts

- 44 - 4 Positions / 4 Contacts
- 64 - 6 Positions / 4 Contacts
- 66 - 6 Positions / 6 Contacts

Color Option



- Blank - Gray
- BLK - Black

Contact Kycon for High Temperature and Other Options

GLX Series

Dimensions in mm

GLX-A-44xx

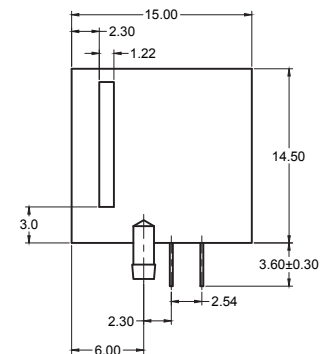

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View GLX-A-44-BLK on WIN SOURCE](#)

 [Kycon, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management