



THE DATASHEET OF
989-068-130L121






DESCRIPTION: SCS1 2 & 3 DIE CAST WITH THUMBSCREWS


SPECIFICATIONS:

MATERIALS:


- BACK SHELL: ZINC PLATED NICKEL OVER COPPER
- JACKSCREWS: STEEL, NICKEL PLATED OVER COPPER
- SCREWS: STEEL, NICKEL PLATED OVER COPPER
- CLAMP: STEEL, NICKEL PLATED

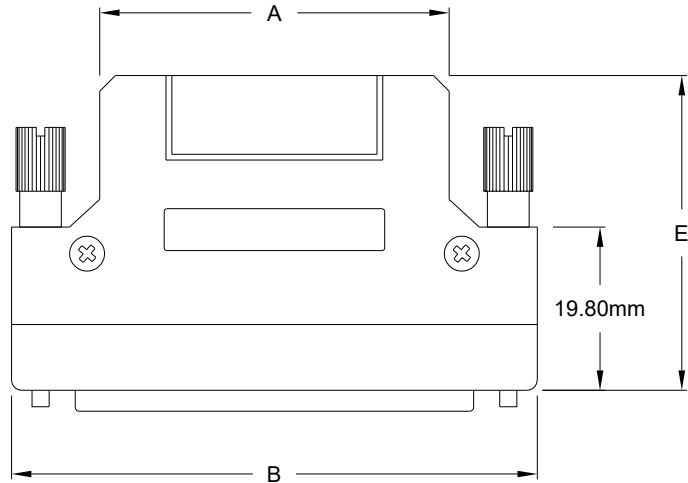

STRAIN RELIEF CLAMP




Jackscrew (2 Places)



DIMENSIONS					
No. OF PINS	A	B	C	D	E
50	1.252 [31.80]	2.98 [53.30]	0.461 [11.70]	0.535 [13.60]	1.520 [38.60]
68	1.673 [42.50]	2.516 [63.90]	0.465 [11.80]	0.543 [13.80]	1.508 [38.30]
ALL TOLERANCES = 0.012 [0.30]					

- KIT INCLUDES:**
- (1) MALE CONNECTOR - SOLDER CUP
 - (2) METAL SHELL HALVES
 - (2) THUMBSCREWS (2-56 THREADS)
 - (1) STRAIN RELIEF CLAMP
 - (2) STRAIN RELIEF SCREWS
 - (2) HOUSING SCREWS

**BACK SHELL KIT
PART NUMBER
989-YYY-130L121**

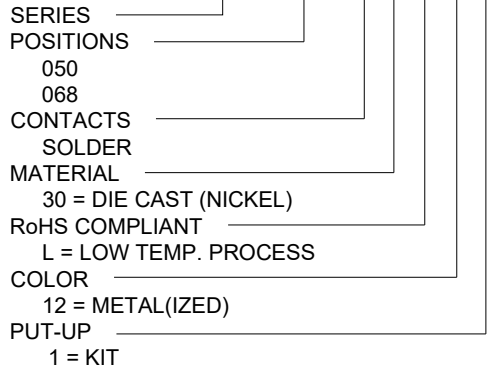

RoHS COMPLIANT

UNITS = inches [mm] **DO NOT SCALE FROM DRAWING**

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: N. KOVALSKY
		DATE: 04/18/2008

NorComp	SCALE: NTS	SHEET 1 OF 3	REV 4
	DWG NO. 989-YYY-130L121		

DESCRIPTION: CONNECTOR FOR 988 SERIES BACK SHELL KIT


SPECIFICATIONS:

MATERIALS:
 HOUSING: THERMOPLASTIC, BLACK PBT UL94V-0
 CONTACTS: PHOSPHOR BRONZE
 5u" GOLD MATING AREA
 100u" MIN TIN SOLDER AREA
 FRONT SHELL: STEEL, NICKEL PLATED OVER COPPER



ELECTRICAL:
 RATED CURRENT: 0.5A
 DIELECTRIC WITHSTANDING: 500VAC
 INSULATION RESISTANCE: 500 MOhms MIN.
 CONTACT RESISTANCE: 35 mOhms MAX.

ENVIRONMENT:
 OPERATING TEMPERATURE: -40°C TO +85°C

MAX RECOMMEND WIRE AWG: 22 AWG

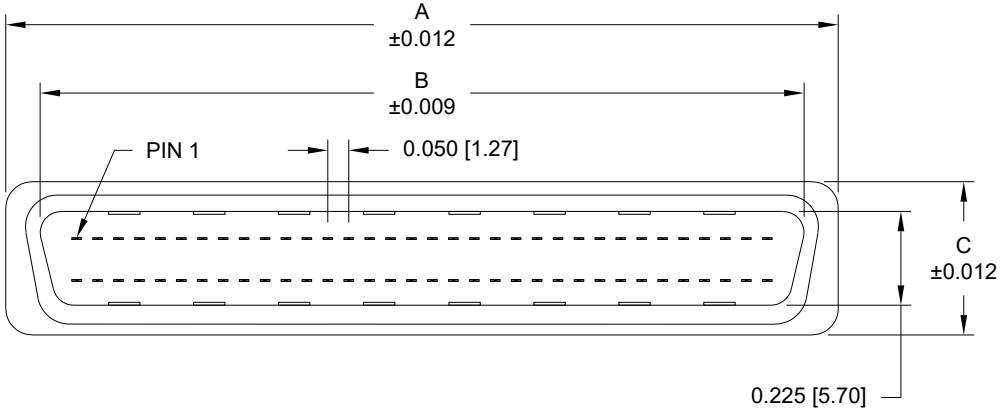

No. OF PINS	DIMENSIONS		
	A	B	C
50	1.545 [39.30]	1.372 [34.85]	0.366 [9.30]
68	1.996 [50.70]	1.825 [46.35]	0.366 [9.30]

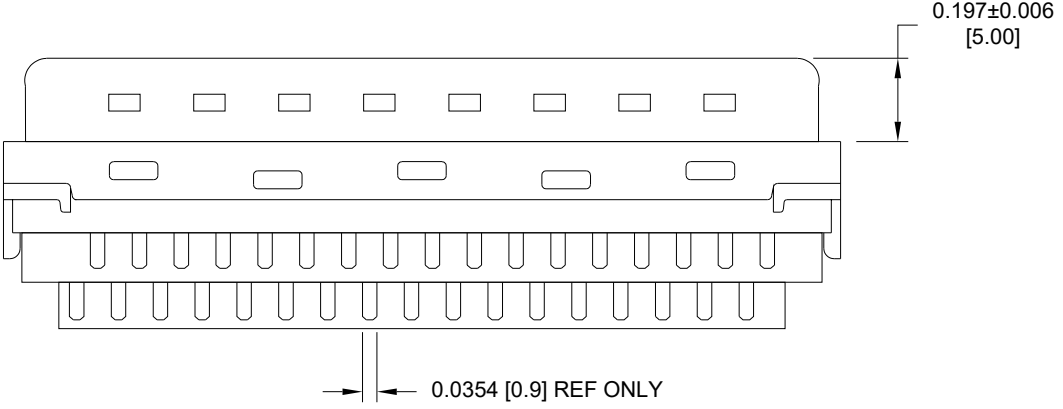

RoHS COMPLIANT

UNITS = inches [mm] DO NOT SCALE FROM DRAWING






THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: N. KOVALSKY
 DATE: 04/18/2008






SCALE: NTS SHEET 2 OF 3 REV 4
 DWG NO. 989-YYY-130L121

50 POSITION

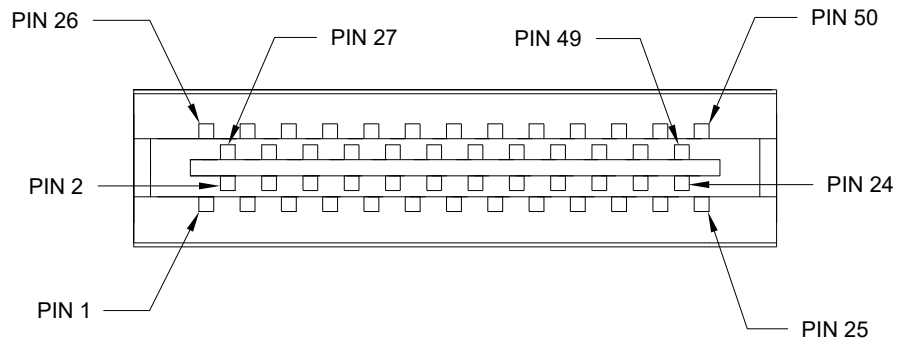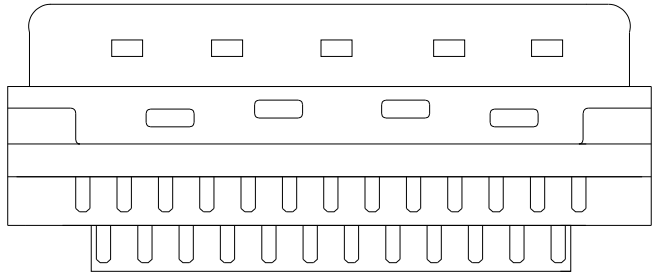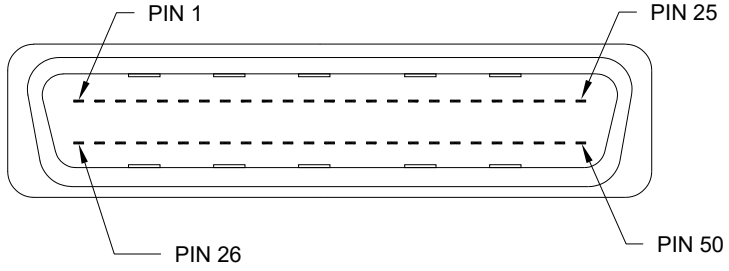

68 POSITION

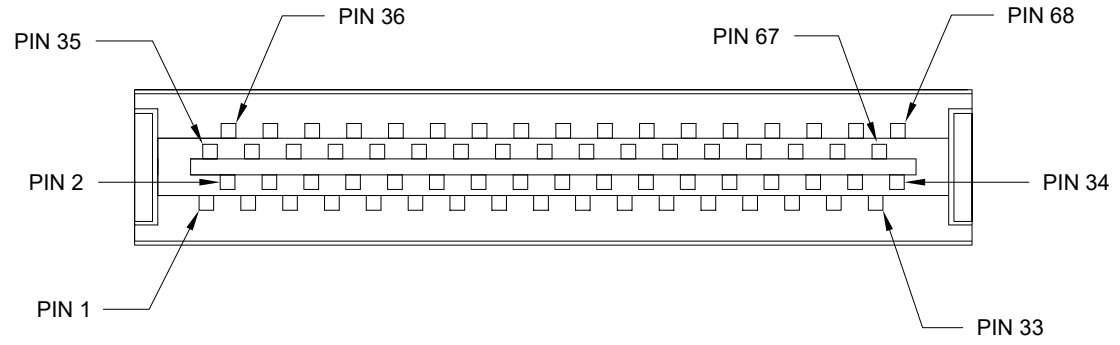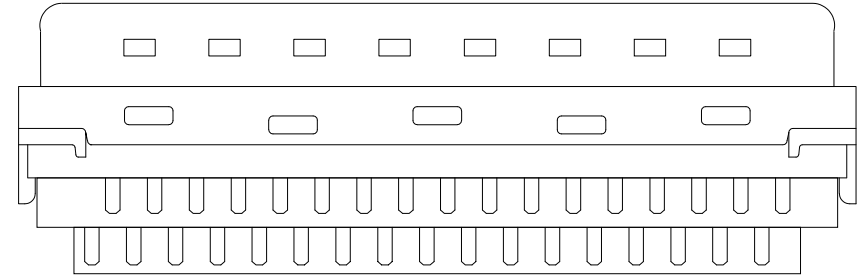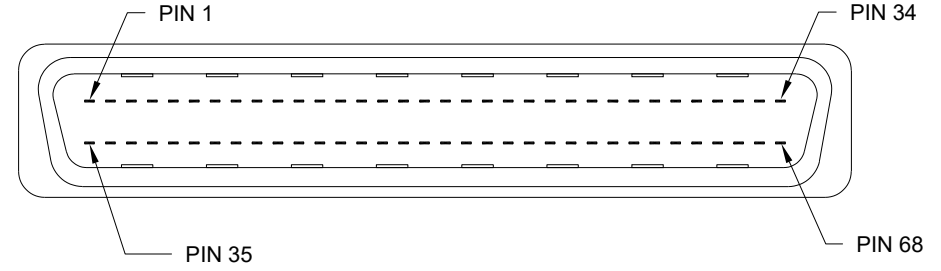

RoHS COMPLIANT

UNITS = inches [mm] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
N. KOVALSKY
DATE:
04/18/2008

NorComp

SCALE: NTS	SHEET 3	OF 3	REV 4
DWG NO.		989-YYY-130L121	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 989-068-130L121 on WIN SOURCE](#)

 [NorComp Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management