



**THE DATASHEET OF  
VJ5301M433MXBSR**





# Surface Mount Ceramic Chip Antennas for 433 MHz



VJ5301M433MXBSR chip antenna product

RoHS COMPLIANT

The VJ5301M433 series are small form-factor, high-performance chip-antennas optimized for industrial, automotive, and medical applications.

Utilizing unique Vishay™ materials and manufacturing technologies, these products when properly tuned also comply with the MBRAI standard for portable communication.

Vishay™ VJ5301M433MXBSR chip antennas are covered by one or more of the following patents:

WO2008250262 (A1), US2008303720 (A1), US2008305750 (A1), WO2008154173 (A1).

Other patents are pending.

## ELECTRICAL SPECIFICATIONS<sup>2</sup>

Operating Temperature: -40 °C to + 85 °C

Frequency Range (Transmission/Reception): 370 to 510 MHz

## DESCRIPTION

The VJ5301M433MXBSR ceramic chip antenna is a small form-factor, high-performance, chip-antenna designed for operation at 433 MHz. It allows manufacturers to design high quality products that do not bear the penalty of a large external antenna, and is designed to be assembled onto a PC board using a standard reflow process.

The VJ5301M433 is the latest in a family of products developed by Vishay™, a world leader in manufacturing of discrete and passive components.

## Features

- Small outline (35 mm x 5 mm x 1.2 mm)
- 50Ω unbalanced tuning interface (max. -5.7 dBi gain<sup>1</sup>)
- Assembled onto a PCB in the standard reflow process
- 140 MHz half-power tuned bandwidth (370 to 510 MHz)
- High-reliability ceramic-oxide body construction
- Low-RF-loss, high-Q ceramic
- Lead (Pb)-free / wet build process
- Reliable Noble Metal Electrode (NME) system
- Compliant to RoHS Directive 2002/95/EC
- Halogen-free per IEC 61249-2-21
- Wide operating temperature range (-40 °C to + 85 °C)

## Applications

- Medical Telemetry (internal/external)
- Broadband transmission and reception
- Automotive (TPMS, etc.)
- Industrial and medical band applications

QUICK REFERENCE DATA					
SERIES	FREQUENCY (MHz)	MAX. GAIN (dBi)	AVERAGE GAIN (dBi)	BANDWIDTH (- 10 dB) (MHz)	BANDWIDTH (- 3 dB) (MHz)
VJ5301M433MXBSR	433	-5.7	- 8.7	58	120

CHIP ANTENNA PERFORMANCE									
NOMINAL FREQUENCY (MHz)	NOMINAL IMPEDANCE (Ω)	433 MHz AVERAGE GAIN (dBi)	433 MHz PEAK GAIN (dBi)	REFLECTED POWER COEFFICIENT S11	433 MHz REFLECTED POWER LOSS	- 3 dB BANDWIDTH 370 MHz to 510 MHz	- 3 dB REFLECTED POWER LOSS	- 10 dB BANDWIDTH 397 MHz to 455 MHz	- 10 dB REFLECTED POWER LOSS
433	50	- 8.7	-5.7	< -18 dB	1.6 %	140	50 %	58	10 %
				1.6 %	< 0.07 dB		3 dB		0.46 dB

Table 1 of quick reference data and chip antenna performance

<sup>1</sup> See Figures 1 through 6 for more details on the radiation pattern (antenna gain) at 433 MHz; the PCB board ground is shorted to earth ground for tuning.

<sup>2</sup> Electrical characteristics at +25 °C unless otherwise specified. Antenna performance is measured at 433 MHz and 50 Ohm impedance unless otherwise specified. The best results are obtained by mounting the chip following the layout guidelines application note for the evaluation kit.

### VJ5301M433MXBSR Tuning

Final tuning configuration and component values for  $L_1$ ,  $L_2$ , and  $C_1$  depend on customer PCB layout. Optimal tuning is possible with just a few standard components. **The nominal values shown are for a tuned VJ5301M433MXBEK kit.**

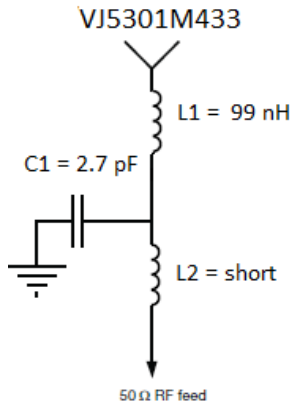


Figure 1 Tuning example with inductors  $L_1$ ,  $L_2$  and capacitor  $C_1$

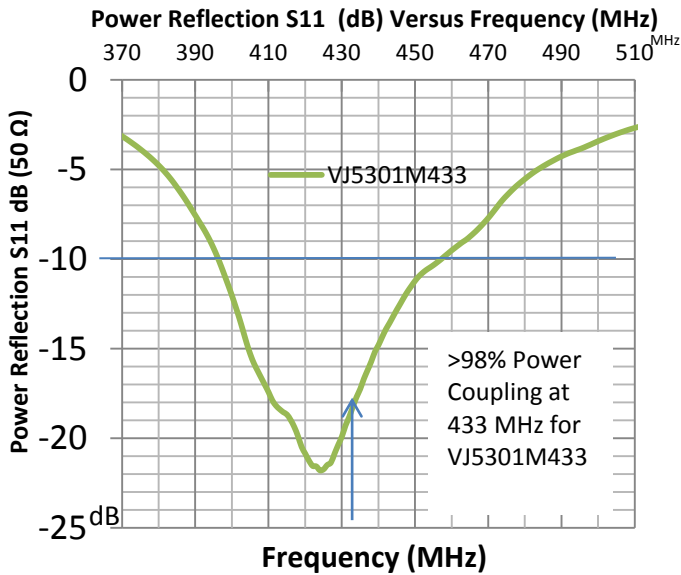


Figure 2 VJ5301M433 tuned to 433 MHz with > 98% power coupled

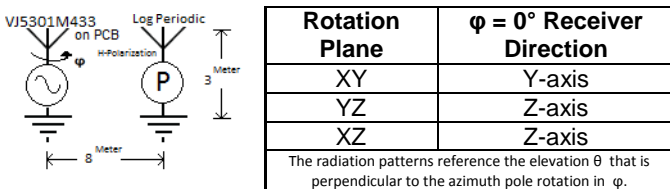


Figure 3 VJ5301M433 PCB mounting and coordinate directions

Figure 4 VJ5301M433MXBSR XY Radiation Pattern

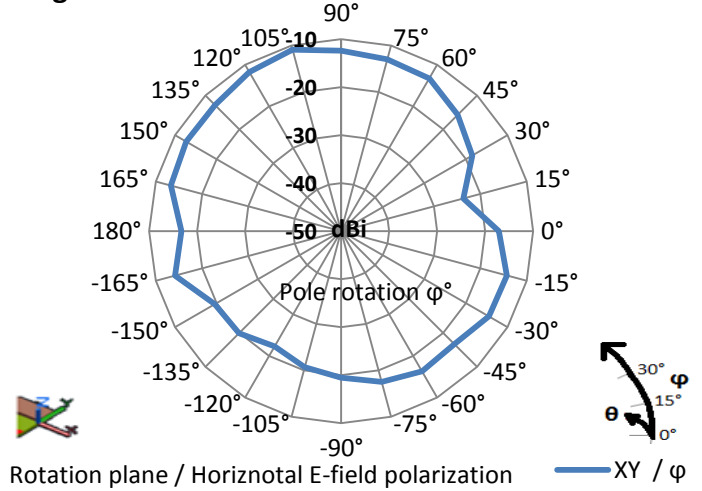


Figure 5 VJ5301M433MXBSR YZ Radiation Pattern


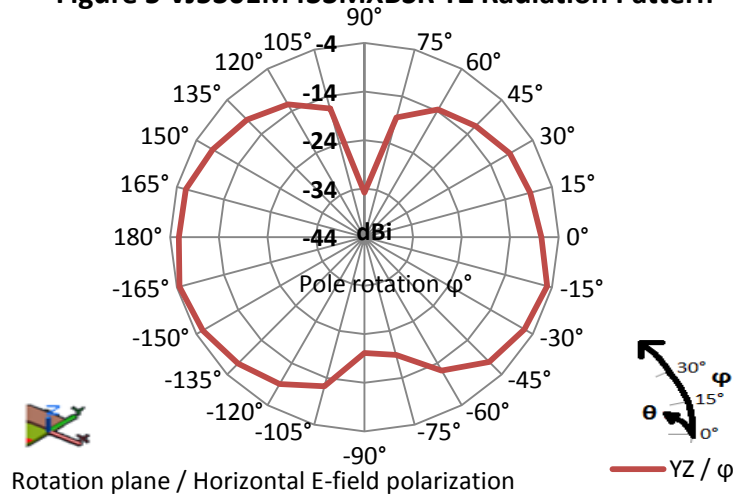


Figure 6 VJ5301M433MXBSR XZ Radiation Pattern

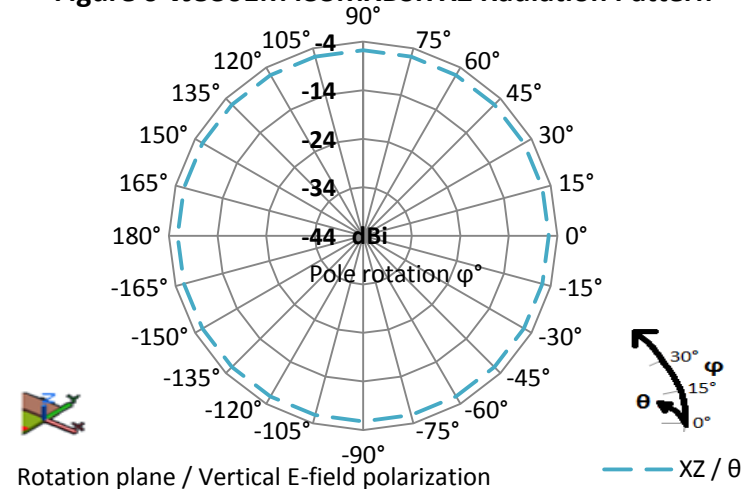

### FOOTPRINT, MECHANICAL AND PCB DIMENSIONS

The antenna footprint and mechanical dimensions are presented in Figure 7. Optimal tuning is adjusted according to PCB layout.

For additional mechanical support, it is recommended to add one drop of heat curing epoxy glue.

- The glue dot should not overlap with any of the soldering pads.
- Apply the glue dot at the center of the antenna.
- The glue dot area secures the chip firmly to the PCB.

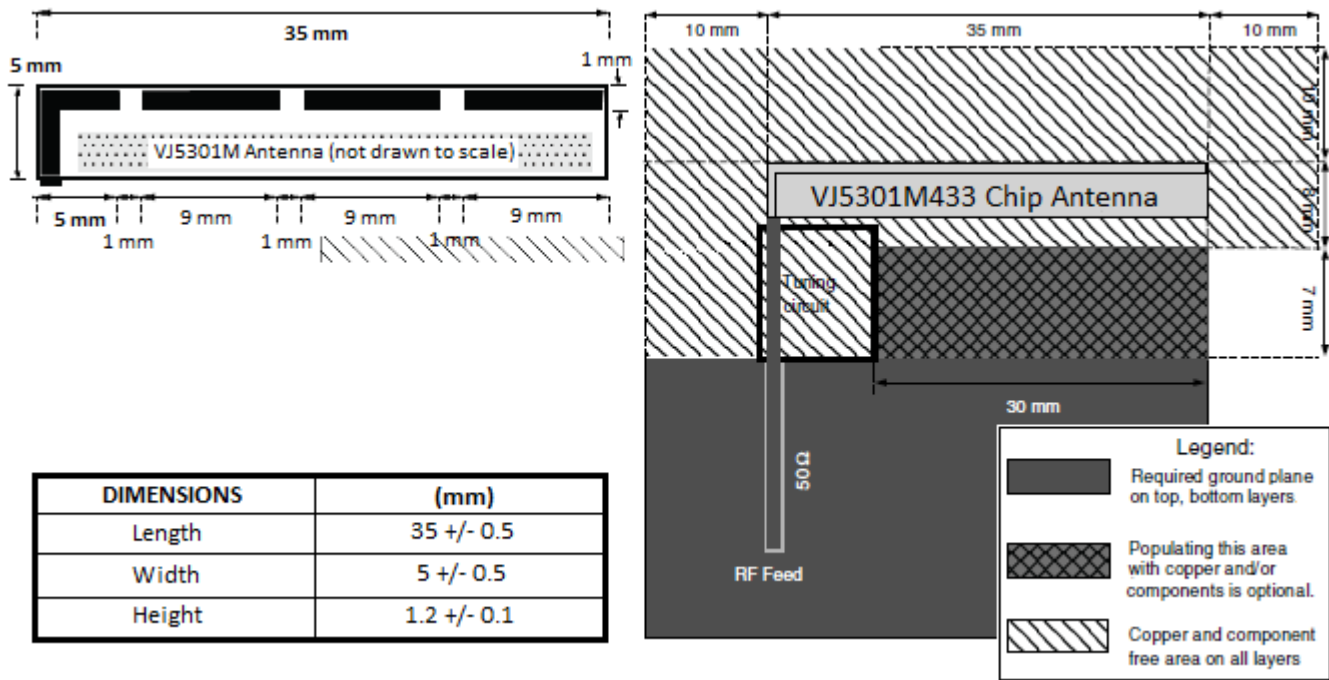


Figure 7 of VJ5301M433 footprint, chip antenna mechanical dimensions, and PCB layout dimensions

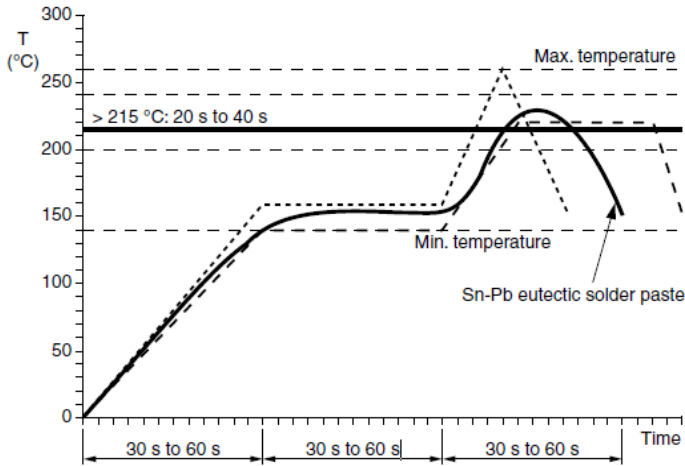


Figure 8 Soldering IR Reflow with SnPb Solder

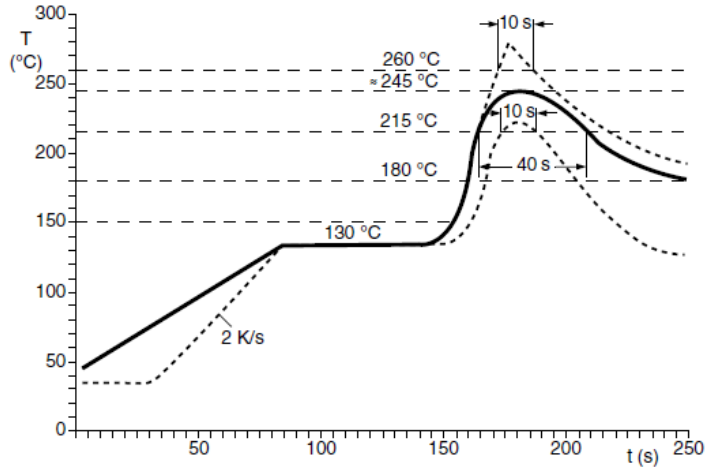


Figure 9 Soldering Reflow with Sn Solder

**VJ5301M433 ASSEMBLY GUIDELINES**

1. Mounting of antennas on a printed circuit board should be done by reflow soldering using the profiles shown (Figures 8, 9, and 10).
2. In order to provide the adequate strength between the antenna and the PCB apply of a dot of heat cured epoxy glue in the center of the footprint of the antenna prior to soldering the antenna to the board. An example for such glue is Heraeus PD 860002 SA. The weight of the dot should be 5 mg to 10 mg.

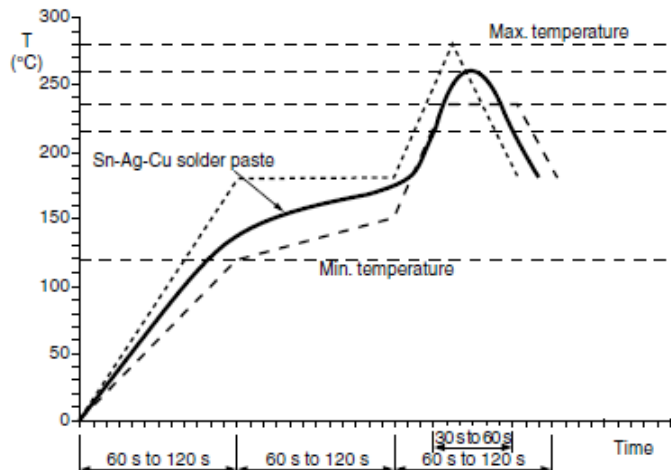


Figure 10 Soldering IR Reflow with SnAgCu Solder

ORDERING INFORMATION	VISHAY MATERIAL	PACKAGING QUANTITY
VJ5301M433 Chip Antenna	VJ5301M433MXBSR	1000 pieces
VJ5301M433 Evaluation Kit <sup>3</sup>	VJ5301M433MXBEK	1 kit

<sup>3</sup> The VJ5301M433 Kit is available for evaluation. For samples, please contact [mlcc-samples@vishay.com](mailto:mlcc-samples@vishay.com).



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death.

Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View VJ5301M433MXBSR on WIN SOURCE](#)

 [Vishay Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management