




**THE DATASHEET OF
BF2661-24B**



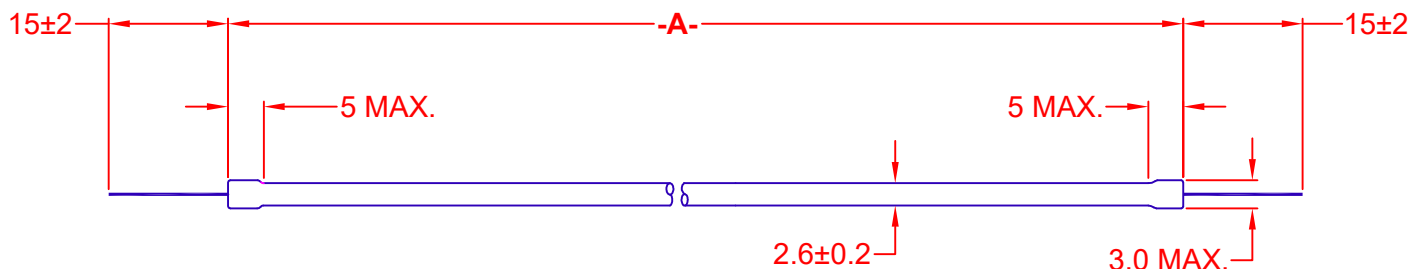

JKL PART NUMBER	-A- LENGTH	LCD HIGH OUTPUT WHITE RGB COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mA rms)	BRIGHTNESS (CANDELA/m ²)	*RATED LIFE (HRS) MINIMUM
BF2661-24B	61±1.0**	9,400°k x = .285 ± .03 y = .283 ± .03	490 @ 0°C	195	5 ± 1	30,000 TYP.	20,000
BF26180-24B	180±3.0		975 @ 0°C	390			
BF26188-24B	188±3.0		1115 @ 0°C	405			
BF26214-24B	214±2.0**		1150 @ 0°C	445			
BF26230-24B	230±3.0		1240 @ 0°C	495			
BF26240-24B	240±3.0		1290 @ 0°C	515			
BF26250-24B	250±1.5		1350 @ 0°C	540			

NOTES:

* RATED LIFE IS DEFINED AS THE POINT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.



** LEAD LENGTH 15±3.0.

RATINGS AT 25°C UNLESS OTHERWISE SPECIFIED.

METRIC 		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/- 0		JKL COMPONENTS CORPORATION					
E CHANGE LEAD LENGTH TO 15±2 1/28/20 D RATED LIFE HRS MINIMUM & 20,000 - & MARKUP 8/5/09 C CORRECT x & y TOLERANCE 7/5/06 B LENGTH TOLERANCE CHANGE ON BF26250-24B 2/3/06 A ELECTRICAL CHANGES & ADD PART BF2661-24B 10/20/04 RELEASED TO CAD MULTI LIST 8/14/03		DRAWN BY L. WENGSTROM APPV'D BY S.N. DATE 1/28/20		TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP		SIZE A FSCM NO. 55335 DRAWING NO. BF 26-24B			
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE NONF		RELEASED DATE 8/14/03		REVISION DATE 1/28/20		REV. NO. E SHEET 1 OF 1	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BF2661-24B on WIN SOURCE](#)
-  [JKL Components Corp. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management