






# THE DATASHEET OF FLP25-2.0



NOTES:

1. ALLOWABLE CUT LENGTH IS UP TO 3 DECIMAL PLACES.

REV.	DESCR
A	ENGINEERING RELEASE
B	UPDATED FIBER IN BOM
C	ECO-1219: UPDATED LEN
D	ECO-1267: UPDATED CO
E	ECO-1274: UPDATED MF

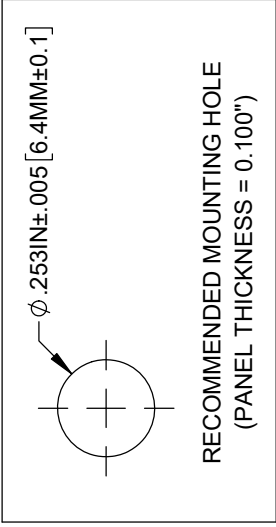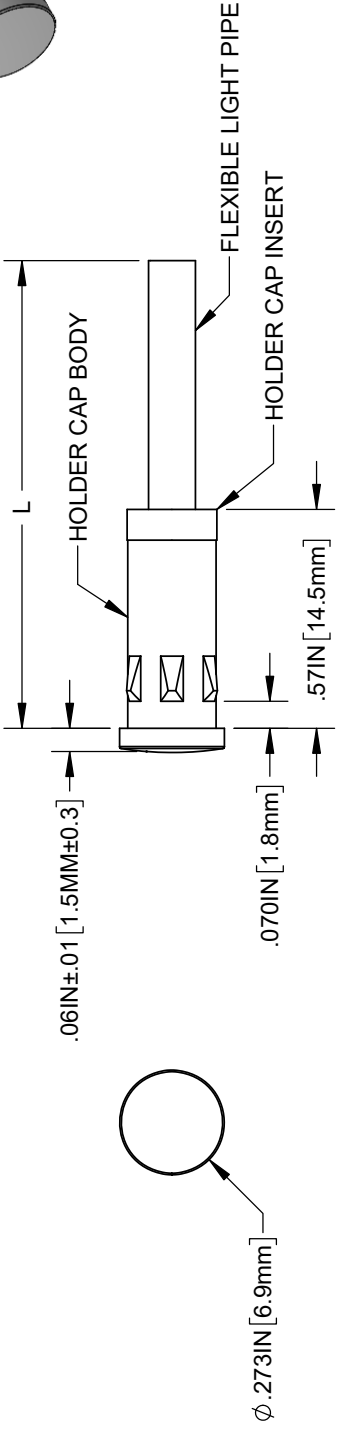

LENGTH (L)	TOLERANCE
0.750" ~ 16.000"	$\pm 0.050"$
16.001" ~ 40.000"	$\pm 0.150"$
40.001" ~ 80.000"	$\pm 0.300"$
80.001" ~ 3,940.0"	$\pm 0.5\%$

**CUSTOMER**

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)	
DECIMALS	$X^\circ \pm 1^\circ$
ANGULAR	$X^\circ \pm 1^\circ$
DECIMALS	$X^\circ \pm 1^\circ$
ANGULAR	$X^\circ \pm 1^\circ$
DESIGNED:	B. OLIVER
DATE:	9/14/2009
REVISOR:	K. BARON
DATE:	7/10/2024
CHECKED:	A. VALDEZ
DATE:	7/10/2024

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View FLP25-2.0 on WIN SOURCE](#)

 [Bivar Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management