



**THE DATASHEET OF**  
**F-367P**



### F-367P

#### Electrical Specifications (@25C)

1. Maximum Power: 1.5 VA
2. Primary: Series: 230V @ 50/60 Hz  
Parallel: 115V @ 50/60Hz
3. Secondary: Series: 230.0V CT @ 0.0065 Amps  
Parallel: 115.0V CT @ 0.0130 Amps

#### Description:

The F-367P is part of a wide selection of plug-in types that meet the needs of PC boards and solid state power supply design. This transformer can satisfy power as well as control and instrumentation applications.

#### Construction:

Wound on a single channel nylon bobbin. Materials are UL recognized, Class B (130° C) rated.

#### Safety:

These products are 100% hipot tested with an insulation of 1500V between primary and secondary windings.


#### Dimensions:

Units: In inches

A	B	C	D	E
1.125	1.375	1.125	0.203	1.00

Pin length: 0.187 in.  
Pin size: 0.020 x .041 in.  
Weight: 4.0 oz


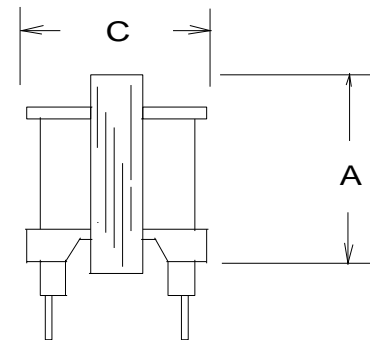

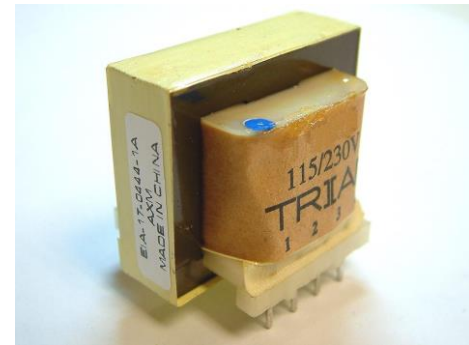
#### Schematic:



- Primary: Series - 1 to 4, Jumper 2 to 3  
Parallel - 1 to 4, Jumper 1 to 3 and 2 to 4
- Secondary: Series - 5 to 8, Jumper 6 to 7  
Parallel - 5 to 8, Jumper 5 to 7 and 6 to 8



**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View F-367P](#) on WIN SOURCE
-  [Triad Magnetics](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management