




**THE DATASHEET OF
V3L-3003-D8**



CATALOG LISTING
V3L-3003-D8
PAGE 1 OF 1
RELEASE NO. PR-1056
REPLACES
ISSUE 17
REVISIONS
A CO 92173 TSM 9 OCT 98
B 0012902 KR 29 APR 05
CHECK 29 APR 05
AK
CHECK 9 OCT 98
JAF
CHECK 9 OCT 98
TSM 9 OCT 98
DRAWN

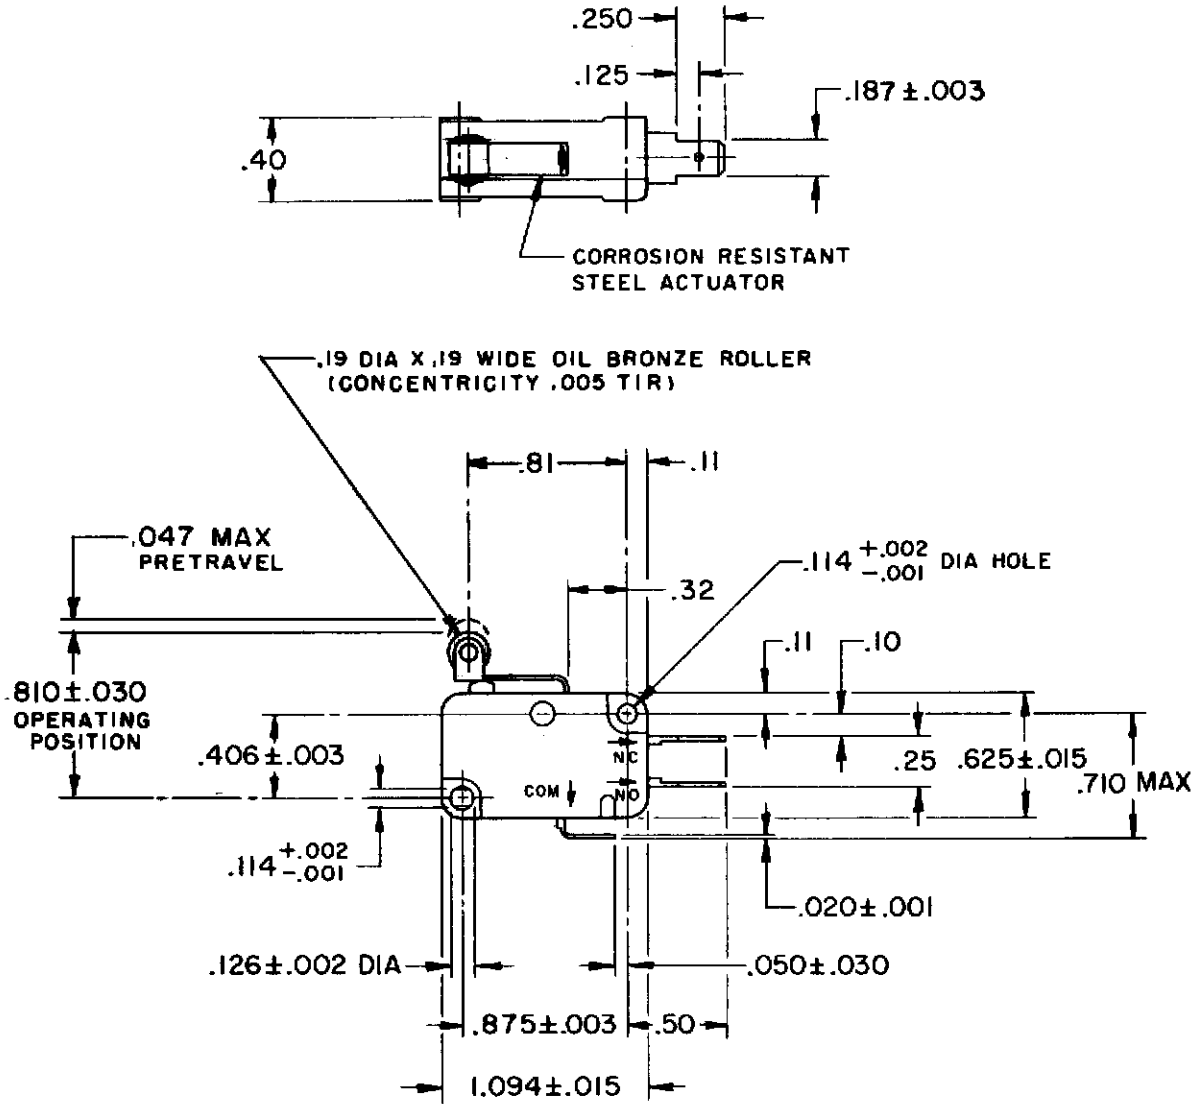


NOTES

- 1 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 302° F
- 2 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING FIVE POUNDS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - 195 GRAMS MAX	CONTACT ARRANGEMENT SPDT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE - - - - - 15 GRAM MIN	L83	ONE PLACE (.0) ± .030	
DIFFERENTIAL TRAVEL - - - .013 MAX	15.1A 1/2HP 125 OR 250 VAC	TWO PLACE (.00) ± .015	
OVERTRAVEL - - - - - .040 MIN	1/2A 125 VDC, 1/4A 250 VDC	THREE PLACE (.000) ± .005	
RELEASE TRAVEL - - - - - .007 MIN	5A 125 VAC "L"	ANGLES ±	
	T R U	WEIGHT	

FORMTEK

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View V3L-3003-D8 on WIN SOURCE](#)

 [Honeywell Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management