



THE DATASHEET OF
561R10TCCT22



Lower Voltage Ceramic DC Disc Capacitors 1000 V_{DC} Precision Capacitors


RoHS
COMPLIANT

FEATURES

- Ultra stable over temperature and voltage
- Used when ultimate stability is required
- Radial leads
- Ceramic singlelayer capacitor
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

APPLICATIONS

- Temperature compensating
- Resonant circuit

DESIGN

The capacitors consist of a ceramic disc of which both sides are silver-plated. Connection leads are made of tinned copper or tinned copper clad steel having diameters of 0.020" (0.51 mm) or 0.025" (0.64 mm).

The capacitors may be supplied with radial kinked or straight leads having lead spacing of 0.250" (6.35 mm) or 0.375" (9.5 mm).

Coating is made of flame retardant epoxy resin in accordance with "UL 94 V-0".

QUICK REFERENCE DATA			
DESCRIPTION	VALUE		
Ceramic Class	1		
Ceramic Dielectric	C0K	C0G	U2J
Voltage (V _{DC})	1000		
Min. Capacitance (pF)	1.0	3.0	33
Max. Capacitance (pF)	2.7	270	680
Mounting	Radial		

INSULATION RESISTANCE

Min. 1000 ΩF or 50 000 MΩ

TOLERANCE ON CAPACITANCE

± 5 %

DISSIPATION FACTOR

0.1 % max. at 1 MHz; 1 V

CATEGORY TEMPERATURE RANGE

-55 °C to +125 °C

CLIMATIC CATEGORY ACC. TO EN 60068-1

55/125/21

OPERATING TEMPERATURE RANGE

-55 °C to +105 °C ⁽¹⁾

Note

- ⁽¹⁾ For explanation about the difference of operating temperature range and temperature characteristic of capacitance, please see www.vishay.com/doc?48299

CAPACITANCE RANGE

1.0 pF to 680 pF

RATED VOLTAGE

1000 V_{DC}


DIELECTRIC STRENGTH BETWEEN LEADS

Component test, 100 % test at production line:


2500 V_{DC}, 2 s

CERAMIC DIELECTRIC

C0K, C0G, U2J (class 1)

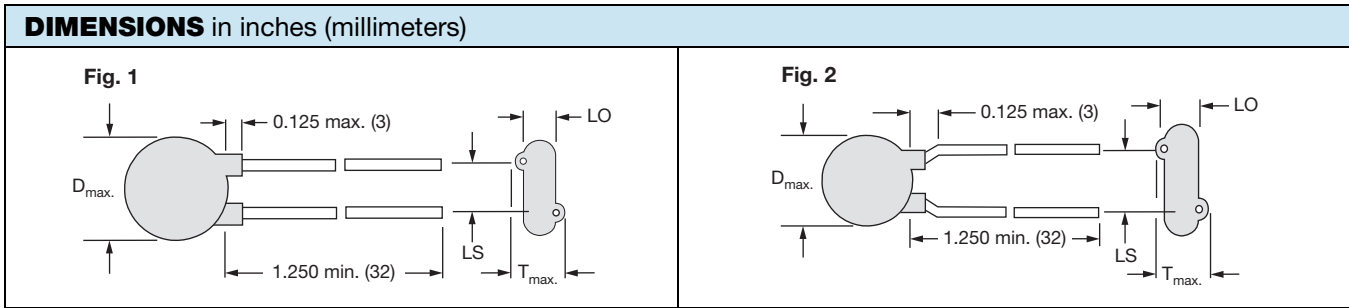

ORDERING INFORMATION, CERAMIC 1000 V_{DC} PRECISION CAPACITORS									
C (pF)	TOL.	D _{max.} DIAMETER INCH (mm)	T _{max.} THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm) ± 1 mm	LO LEAD OFFSET INCH (mm) ± 0.5 mm	WIRE SIZE		FIG.	ORDERING CODE
						AWG	INCH (mm)		
C0K (P100)									
1.0	± 0.5 pF	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	0.098 (2.5)	24	0.020 (0.51)	2	561R10TCCV10
2.2					0.051 (1.3)				561R10TCCV22
2.7					0.043 (1.1)				561R10TCCV27
C0G (NPO)									
3.0	± 0.5 pF	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	0.063 (1.6)	24	0.020 (0.51)	2	561R10TCCV30
3.3					0.055 (1.4)				561R10TCCV33
3.9					0.055 (1.4)				561R10TCCV39
4.7					0.043 (1.1)				561R10TCCV47
5.0					0.043 (1.1)				561R10TCCV50
5.6					0.039 (1.0)				561R10TCCV56
6.8					0.047 (1.2)				561R10TCCV68
8.2					0.043 (1.1)				561R10TCCV82
10					0.051 (1.3)				561R10TCCQ10
12					0.043 (1.1)				561R10TCCQ12
15					0.039 (1.0)				561R10TCCQ15
18					0.043 (1.1)				561R10TCCQ18
20					0.039 (1.0)				561R10TCCQ20
22					0.039 (1.0)				561R10TCCQ22
25					0.035 (0.9)				561R10TCCQ25
27	0.047 (1.2)	561R10TCCQ27							
30	0.051 (1.3)	561R10TCCQ30							
33	0.047 (1.2)	561R10TCCQ33							
39	0.043 (1.1)	561R10TCCQ39							
47	0.051 (1.3)	561R10TCCQ47							
50	0.047 (1.2)	561R10TCCQ50							
56	0.047 (1.2)	561R10TCCQ56							
68	0.047 (1.2)	561R10TCCQ68							
82	0.043 (1.1)	561R10TCCQ82							
100	± 5 %	0.370 (9.4)	0.156 (4.0)	0.250 (6.4)	0.047 (1.2)	22	0.025 (0.64)	1	561R10TCCT10
120					0.047 (1.2)				561R10TCCT12
150					0.043 (1.1)				561R10TCCT15
180					0.043 (1.1)				561R10TCCT18
220					0.043 (1.1)				561R10TCCT22
270					0.047 (1.2)				561R10TCCT27
330					0.047 (1.2)				561R10TCCT33
390					0.047 (1.2)				561R10TCCT39
470					0.047 (1.2)				561R10TCCT47
560					0.047 (1.2)				561R10TCCT56
680	0.047 (1.2)	561R10TCCT68							
820	0.043 (1.1)	561R10TCCT82							
1000	0.043 (1.1)	561R10TCCT1000							
1200	0.043 (1.1)	561R10TCCT1200							
1500	0.043 (1.1)	561R10TCCT1500							
1800	0.043 (1.1)	561R10TCCT1800							
2200	0.043 (1.1)	561R10TCCT2200							
2700	0.043 (1.1)	561R10TCCT2700							
3300	0.043 (1.1)	561R10TCCT3300							
3900	0.043 (1.1)	561R10TCCT3900							
4700	0.043 (1.1)	561R10TCCT4700							
5600	0.043 (1.1)	561R10TCCT5600							
6800	0.043 (1.1)	561R10TCCT6800							
8200	0.043 (1.1)	561R10TCCT8200							
10000	0.043 (1.1)	561R10TCCT10000							
12000	0.043 (1.1)	561R10TCCT12000							
15000	0.043 (1.1)	561R10TCCT15000							
18000	0.043 (1.1)	561R10TCCT18000							
22000	0.043 (1.1)	561R10TCCT22000							
27000	0.043 (1.1)	561R10TCCT27000							
33000	0.043 (1.1)	561R10TCCT33000							
39000	0.043 (1.1)	561R10TCCT39000							
47000	0.043 (1.1)	561R10TCCT47000							
56000	0.043 (1.1)	561R10TCCT56000							
68000	0.043 (1.1)	561R10TCCT68000							
82000	0.043 (1.1)	561R10TCCT82000							
100000	0.043 (1.1)	561R10TCCT100000							
120000	0.043 (1.1)	561R10TCCT120000							
150000	0.043 (1.1)	561R10TCCT150000							
180000	0.043 (1.1)	561R10TCCT180000							
220000	0.043 (1.1)	561R10TCCT220000							
270000	0.043 (1.1)	561R10TCCT270000							
330000	0.043 (1.1)	561R10TCCT330000							
390000	0.043 (1.1)	561R10TCCT390000							
470000	0.043 (1.1)	561R10TCCT470000							
560000	0.043 (1.1)	561R10TCCT560000							
680000	0.043 (1.1)	561R10TCCT680000							
820000	0.043 (1.1)	561R10TCCT820000							
1000000	0.043 (1.1)	561R10TCCT1000000							
1200000	0.043 (1.1)	561R10TCCT1200000							
1500000	0.043 (1.1)	561R10TCCT1500000							
1800000	0.043 (1.1)	561R10TCCT1800000							
2200000	0.043 (1.1)	561R10TCCT2200000							
2700000	0.043 (1.1)	561R10TCCT2700000							
3300000	0.043 (1.1)	561R10TCCT3300000							
3900000	0.043 (1.1)	561R10TCCT3900000							
4700000	0.043 (1.1)	561R10TCCT4700000							
5600000	0.043 (1.1)	561R10TCCT5600000							
6800000	0.043 (1.1)	561R10TCCT6800000							
8200000	0.043 (1.1)	561R10TCCT8200000							
10000000	0.043 (1.1)	561R10TCCT10000000							
12000000	0.043 (1.1)	561R10TCCT12000000							
15000000	0.043 (1.1)	561R10TCCT15000000							
18000000	0.043 (1.1)	561R10TCCT18000000							
22000000	0.043 (1.1)	561R10TCCT22000000							
27000000	0.043 (1.1)	561R10TCCT27000000							
33000000	0.043 (1.1)	561R10TCCT33000000							
39000000	0.043 (1.1)	561R10TCCT39000000							
47000000	0.043 (1.1)	561R10TCCT47000000							
56000000	0.043 (1.1)	561R10TCCT56000000							
68000000	0.043 (1.1)	561R10TCCT68000000							
82000000	0.043 (1.1)	561R10TCCT82000000							
100000000	0.043 (1.1)	561R10TCCT100000000							
120000000	0.043 (1.1)	561R10TCCT120000000							
150000000	0.043 (1.1)	561R10TCCT150000000							
180000000	0.043 (1.1)	561R10TCCT180000000							
220000000	0.043 (1.1)	561R10TCCT220000000							
270000000	0.043 (1.1)	561R10TCCT270000000							
330000000	0.043 (1.1)	561R10TCCT330000000							
390000000	0.043 (1.1)	561R10TCCT390000000							
470000000	0.043 (1.1)	561R10TCCT470000000							
560000000	0.043 (1.1)	561R10TCCT560000000							
680000000	0.043 (1.1)	561R10TCCT680000000							
820000000	0.043 (1.1)	561R10TCCT820000000							
1000000000	0.043 (1.1)	561R10TCCT1000000000							
1200000000	0.043 (1.1)	561R10TCCT1200000000							
1500000000	0.043 (1.1)	561R10TCCT1500000000							
1800000000	0.043 (1.1)	561R10TCCT1800000000							
2200000000	0.043 (1.1)	561R10TCCT2200000000							
2700000000	0.043 (1.1)	561R10TCCT2700000000							
3300000000	0.043 (1.1)	561R10TCCT3300000000							
3900000000	0.043 (1.1)	561R10TCCT3900000000							
4700000000	0.043 (1.1)	561R10TCCT4700000000							
5600000000	0.043 (1.1)	561R10TCCT5600000000							
6800000000	0.043 (1.1)	561R10TCCT6800000000							
8200000000	0.043 (1.1)	561R10TCCT8200000000							
10000000000	0.043 (1.1)	561R10TCCT10000000000							
12000000000	0.043 (1.1)	561R10TCCT12000000000							
15000000000	0.043 (1.1)	561R10TCCT15000000000							
18000000000	0.043 (1.1)	561R10TCCT18000000000							
22000000000	0.043 (1.1)	561R10TCCT22000000000							
27000000000	0.043 (1.1)	561R10TCCT27000000000							
33000000000	0.043 (1.1)	561R10TCCT33000000000							
39000000000	0.043 (1.1)	561R10TCCT39000000000							
47000000000	0.043 (1.1)	561R10TCCT47000000000							
56000000000	0.043 (1.1)	561R10TCCT56000000000							
68000000000	0.043 (1.1)	561R10TCCT68000000000							
82000000000	0.043 (1.1)	561R10TCCT82000000000							
100000000000	0.043 (1.1)	561R10TCCT100000000000							
120000000000	0.043 (1.1)	561R10TCCT120000000000							
150000000000	0.043 (1.1)	561R10TCCT150000000000							
180000000000	0.043 (1.1)	561R10TCCT180000000000							
220000000000	0.043 (1.1)	561R10TCCT220000000000							
270000000000	0.043 (1.1)	561R10TCCT270000000000							
330000000000	0.043 (1.1)	561R10TCCT330000000000							
390000000000	0.043 (1.1)	561R10TCCT390000000000							
470000000000	0.043 (1.1)	561R10TCCT470000000000							
560000000000	0.043 (1.1)	561R10TCCT560000000000							
680000000000	0.043 (1.1)	561R10TCCT680000000000							
820000000000	0.043 (1.1)	561R10TCCT820000000000							
1000000000000	0.043 (1.1)	561R10TCCT1000000000000							
1200000000000	0.043 (1.1)	561R10TCCT1200000000000							
1500000000000	0.043 (1.1)	561R10TCCT1500000000000							
1800000000000	0.043 (1.1)	561R10TCCT1800000000000							
2200000000000	0.043 (1.1)	561R10TCCT2200000000000							
2700000000000	0.043 (1.1)	561R10TCCT2700000000000							
3300000000000	0.043 (1.1)	561R10TCCT3300000000000							
3900000000000	0.043 (1.1)	561R10TCCT3900000000000							
4700000000000	0.043 (1.1)	561R10TCCT4700000000000							
5600000000000	0.043 (1.1)	561R10TCCT5600000000000							
6800000000000	0.043 (1.1)	561R10TCCT6800000000000							
8200000000000	0.043 (1.1)	561R10TCCT8200000000000							
10000000000000	0.043 (1.1)	561R10TCCT10000000000000							
12000000000000	0.043 (1.1)	561R10TCCT12000000000000							
15000000000000	0.043 (1.1)	561R10TCCT15000000000000							
18000000000000	0.043 (1.1)	561R10TCCT18000000000000							
22000000000000	0.043 (1.1)	561R10TCCT22000000000000							
27000000000000	0.043 (1.1)	561R10TCCT27000000000000							
33000000000000	0.043 (1.1)	561R10TCCT33000000000000							
39000000000000	0.043 (1.1)	561R10TCCT39000000000000							
47000000000000	0.043 (1.1)	561R10TCCT47000000000000							
56000000000000	0.043 (1.1)	561R10TCCT56000000000000							
68000000000000	0.043 (1.1)	561R10TCCT68000000000000							
82000000000000	0.043 (1.1)	561R10TCCT82000000000000							
100000000000000	0.043 (1.1)	561R10TCCT100000000000000							
120000000000000	0.043 (1.1)	561R10TCCT120000000000000							
150000000000000	0.043 (1.1)	561R10TCCT150000000000000							
180000000000000	0.043 (1.1)	561R10TCCT180000000000000							
220000000000000	0.043 (1.1)	561R10TCCT220000000000000							
270000000000000	0.043 (1.1)	561R10TCCT270000000000000							
330000000000000	0.043 (1.1)	561R10TCCT330000000000000							
390000000000000	0.043 (1.1)	561R10TCCT390000000000000							
470000000000000	0.043 (1.1)	561R10TCCT470000000000000							
560000000000000	0.043 (1.1)	561R10TCCT560000000000000							
680000000000000	0.043 (1.1)	561R10TCCT680000000000000							
820000000000000	0.043 (1.1)	561R10TCCT820000000000000							
1000000000000000	0.043 (1.1)	561R10TCCT1000000000000000							
1200000000000000	0.043 (1.1)	561R10TCCT1200000000000000							
1500000000000000	0.043 (1.1)	561R10TCCT1500000000000000							
1800000000000000	0.043 (1.1)	561R10TCCT1800000000000000							
2200000000000000	0.043 (1.1)	561R10TCCT2200000000000000							
2700000000000000	0.043 (1.1)	561R10TCCT2700000000000000							
3300000000000000	0.043 (1.1)	561R10TCCT3300000000000000							
3900000000000000	0.043 (1.1)	561R10TCCT3900000000000000							
4700000000000000	0.043 (1.1)	561R10TCCT4700000000000000							
5600000000000000	0.043 (1.1)	561R10TCCT5600000000000000							
68000000000000									

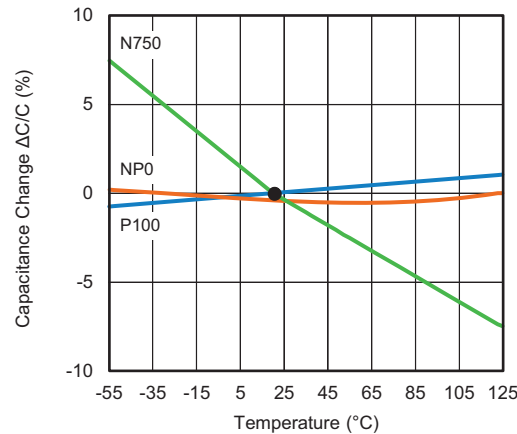CAPACITANCE CHANGE VS. TEMPERATURE (Typical)

STORAGE

The capacitors must not be stored in a corrosive atmosphere, where sulphide or chloride gas, acid, alkali or salt are present. Exposure of the components to moisture, should be avoided. The solderability of the leads is not affected by storage of up to 24 months (temperature +10 °C to +40 °C, relative humidity up to 60 % RH). Class 2 ceramic dielectric capacitors are also subject to aging see general information (www.vishay.com/doc?23140).

SOLDERING

SOLDERING SPECIFICATIONS		
Soldering test for capacitors with wire leads: (according to IEC 60068-2-20, solder bath method)		
	SOLDERABILITY	RESISTANCE TO SOLDERING HEAT
Soldering temperature	(235 ± 5) °C	(260 ± 5) °C
Soldering duration	(2 ± 0.5) s	(10 ± 1) s
Distance from component body	≥ 2 mm	≥ 5 mm

SOLDERING RECOMMENDATIONS

Ceramic capacitors are very sensitive to rapid changes in temperature (thermal shock) therefore the solder heat resistance specification (see table above) should not be exceeded. Exposing the capacitor to excessive heating may result in thermal shocks that can crack the ceramic body. Similarly, excessive heating can cause the internal solder junction to melt.

When soldering radial leaded ceramic capacitors with a soldering iron, it should be performed under the following conditions and should not exceed:

- Maximum temperature of iron-tip: 400 °C
- Maximum soldering iron wattage: 50 W
- Maximum soldering time: 3.5 s

Failure to follow the above cautions may result, in worst case, in short circuit or cause fuming or thermo-mechanical damage when the product is used.

Leaded ceramic capacitors are not designed for reflow process or dipping the body into a solder melt.

CLEANING

The components should be cleaned immediately following the soldering operation with vapor degreasers.

CLEANING (ULTRASONIC CLEANING)

To perform ultrasonic cleaning, observe the following conditions:

- Maximum rinse bath capacity output: 20 W/liter
- Maximum rinsing time: 300 s
- Do not vibrate the PCB/PWB directly
- Excessive ultrasonic cleaning may lead to mechanical damage



SOLVENT RESISTANCE

The coating and marking of the capacitors are resistant to the following test method:
IEC 60068-2-45 (method XA)

MOUNTING

We do not recommend modifying the lead terminals, e.g. bending or cropping. This action could break the coating or crack the ceramic insert. In order to avoid such failures we are offering different lead wire designs (e.g. straight, inline, inside crimp, outside crimp etc.) If however, the lead must be modified in any way, we recommend support of the lead with a clamping fixture next to the coating. If a defined product stop is required for mounting on a PCB, a mechanically formed product stop or a mounting tool should be used.

OPERATING VOLTAGE

In case the voltage is applied to the circuit, starting as well as stopping, may generate irregular voltage for a transit period because of resonance or switching. Be sure to use a capacitor with a rated voltage range that includes these irregular voltages.

OPERATING TEMPERATURE AND SELF-GENERATED HEAT

Keep the surface temperature of a capacitor below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high frequency, pulse, or similar application, it may have self-generated heat due to dielectric dissipation.

Temperature increase due to self-generated heating should not exceed 20 °C while operating at an atmosphere temperature of 25 °C.

When measuring, the surface temperature, make sure that the capacitor is not affected by radiant, conductive and convective heat by its surroundings. Excessive heat may lead to thermo-mechanical deterioration of the capacitor's characteristics and reliability.

RELATED DOCUMENTS	
General Information	www.vishay.com/doc?23140



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 561R10TCCT22 on WIN SOURCE](#)

 [Vishay Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management